

BL AUTOTEC

BL QUICK-CHANGE™

Automatic End-Effector Exchange System




www.bl-autotec.co.jp

BANDO BANDO GROUP
BL AUTOTEC, LTD.

3-17, Meiwa-dori, 3-chome, Hyogo-ku, Kobe, 652-0883, Japan
TEL +81-78-682-2612 FAX +81-78-682-2614
E-mail : info@bl-autotec.co.jp

■ For orders, contact the following distributor:

※ The contents of this catalog are subject to change without notice.
※ Check with BL Autotec for updated catalog content if your catalog was issued more than one year ago.
※ This catalog is not to be reproduced, in whole or in part, without the express permission of BL Autotec.

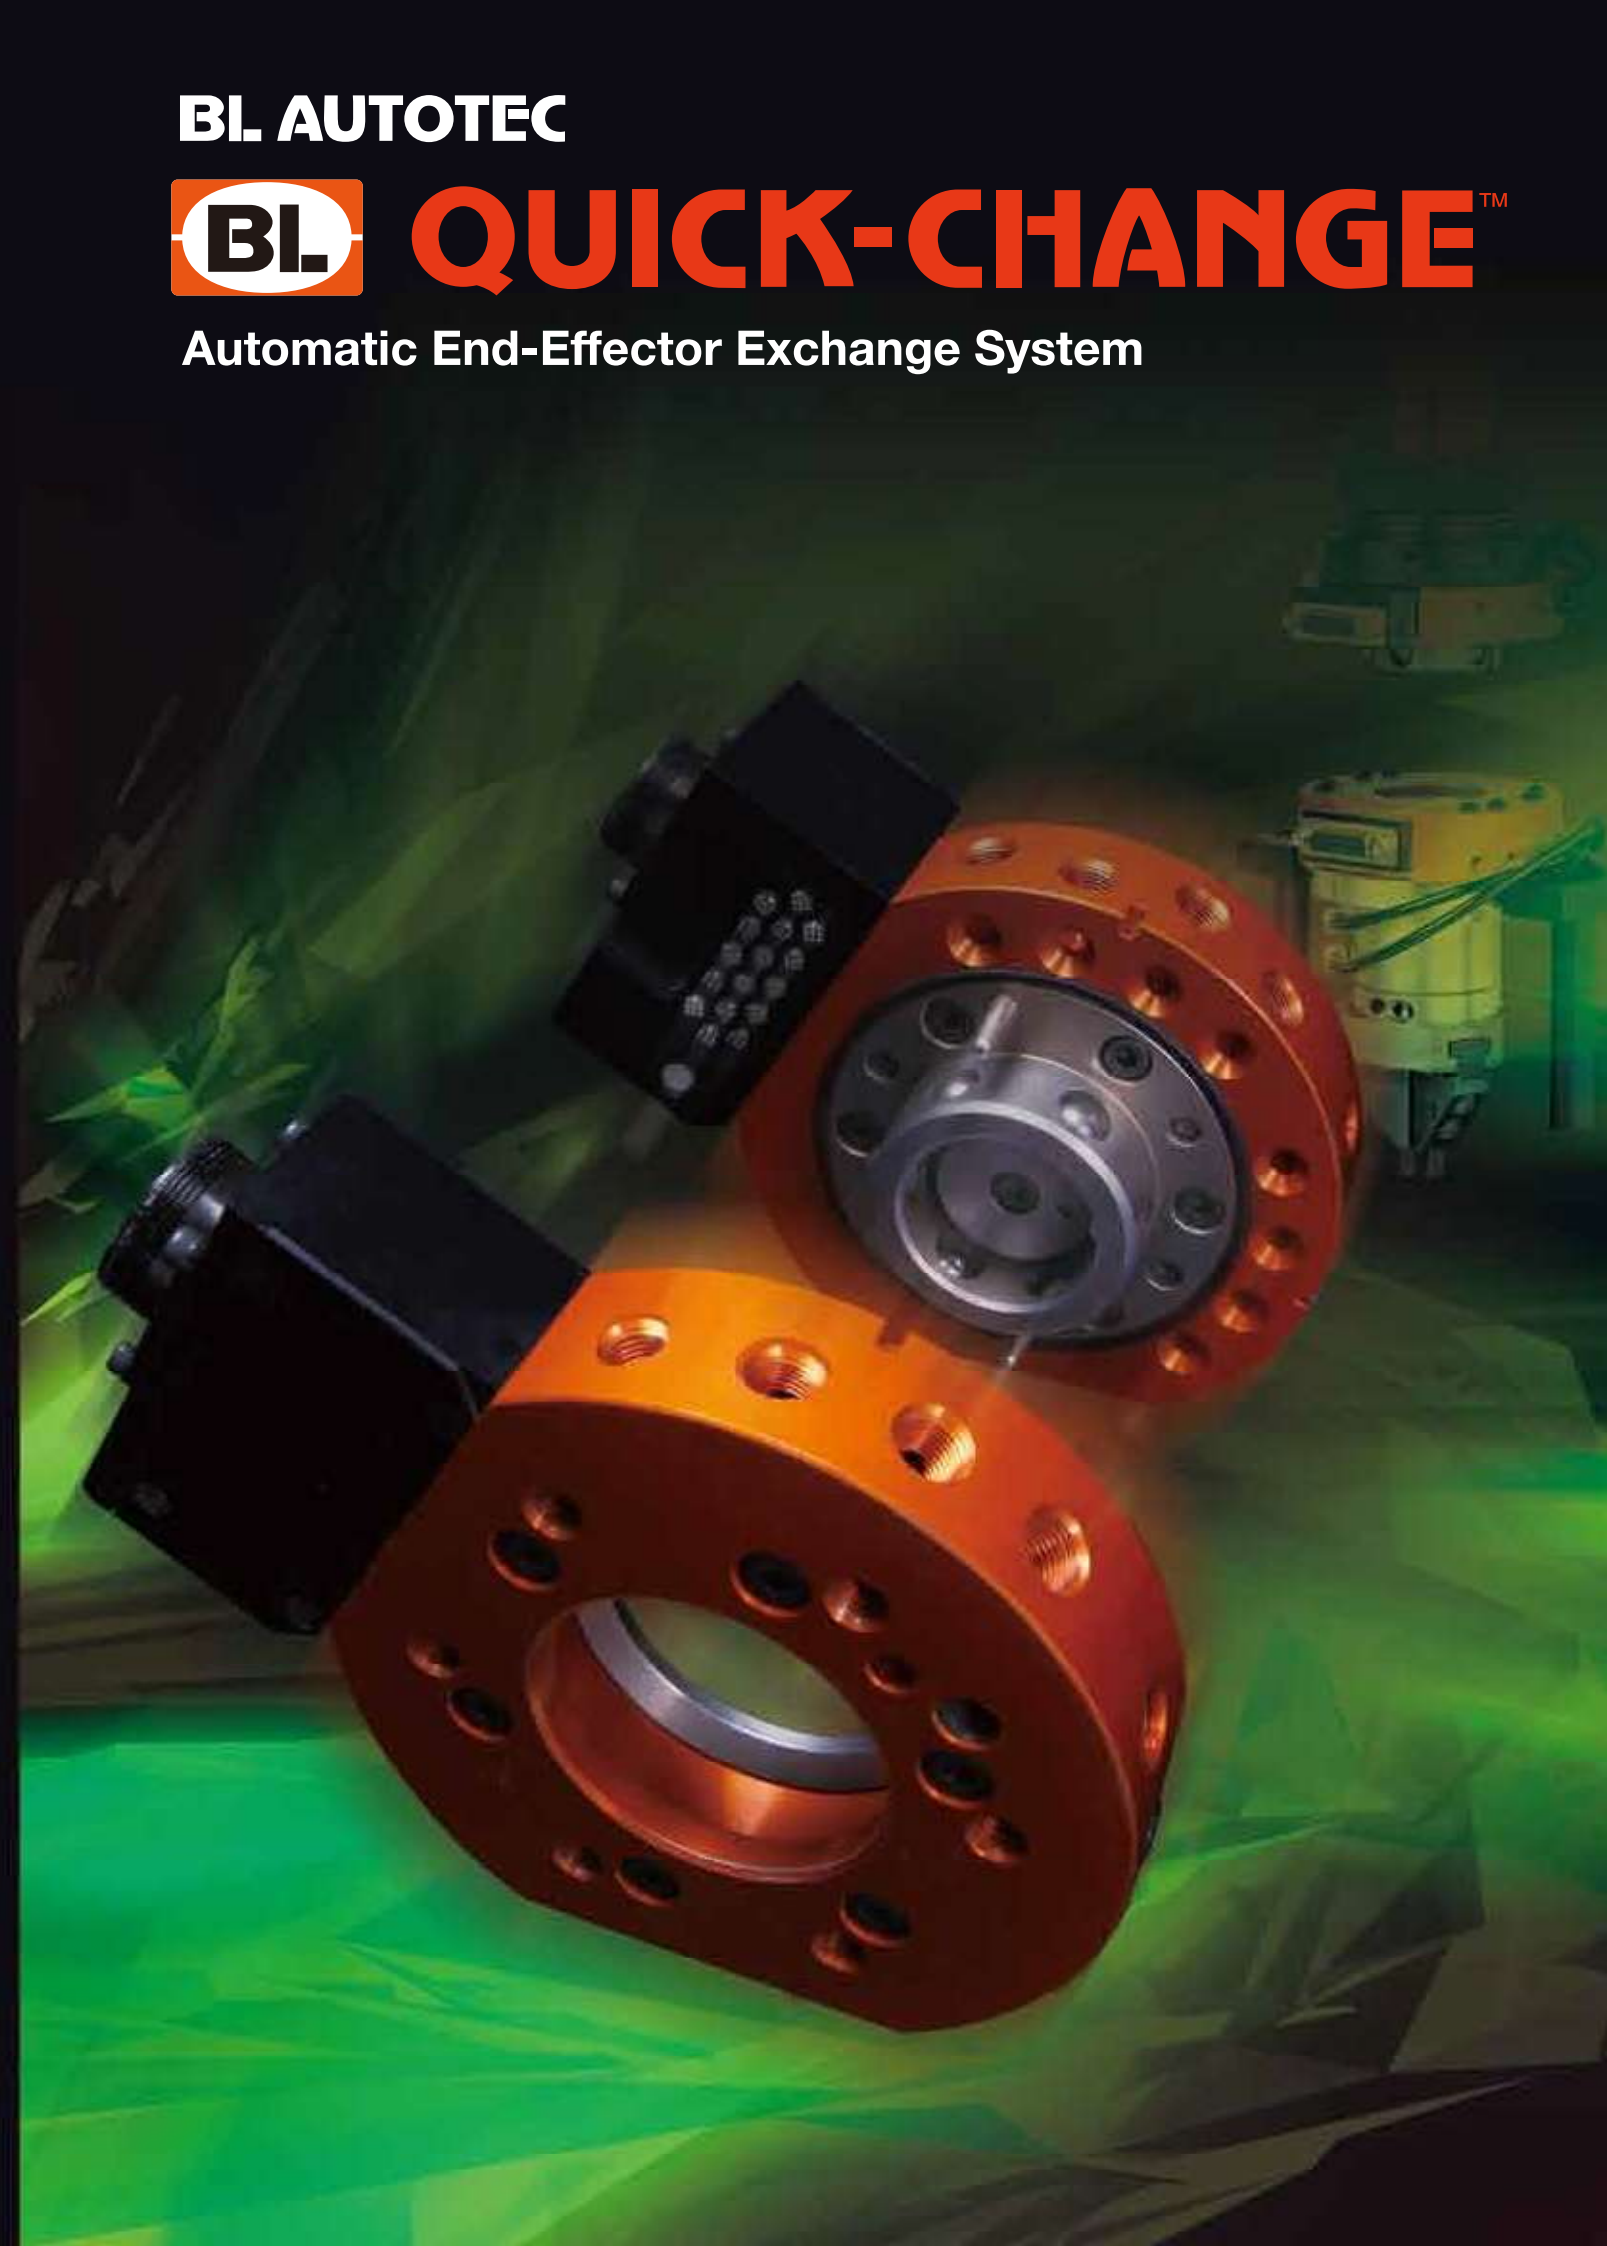


BL AUTOTEC offers production line solutions that exceed expectations based on our abundant experience in the factory automation field.

With a proven track record, and as a pioneer maker of automatic tool changers, BL Autotec has been responding to customer needs and proposing solutions in this field since 1987.

We offer optimum solutions to accommodate individual customer requirements, and deliver original products that exceed expectations.

QUICK-CHANGE™

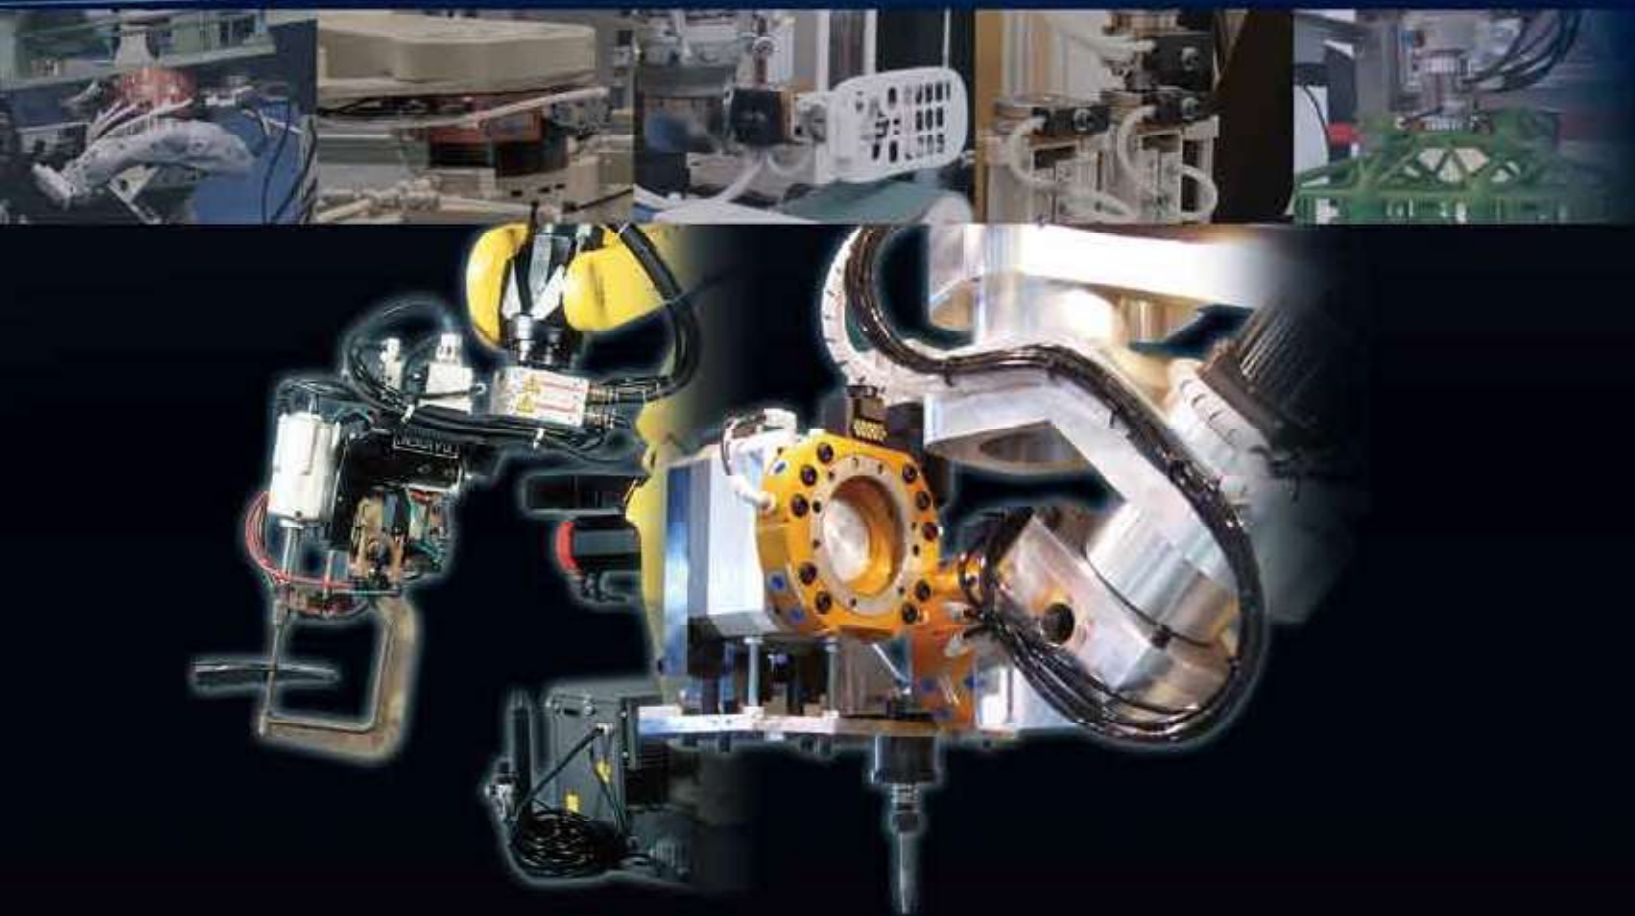

INDEX

BL QUICK-CHANGE™ Overview	
Next-Generation Robots	
ZEUS	06
GIGA	08
Automatic Tool Changer	
QC-1	12
Light-5A	14
QC-10B	16
QC-20D	18
Flex-4 0B	20
QC-60D	22
Flex-70A	24
Flex-100B	26
QCP-100A	28
QC-150C	30
QCP-220	32
Flex-300A	34
Press Handling Specification	
USP-100A	36
Spot-Welding Gun-Changer	
GC-300A	38
Options	
Wire-Saving Module / Contact Block	40
Non-contact electric signal block	42
A mechanical safety valve prevents Tool plate drops	44
Option List	
Option List	46
Product Overview	
Coupling and Uncoupling Mechanism / Lock/Unlock sensors	58
Installation / Allowable positional error	
Optimum clearance between plates for teaching	
Cautions prior to use / Types of electrical contacts	
Custom Quick-Change / Solenoid Valve Selection	
BL ROTARY JOINT™ Overview	
PN-ZERO Series	67
BL WRIST COMPLIANCER™ Overview	
RCC DEVICE	72
LOCK-UP RCC DEVICE	
BL COUPLE JOINT™ Overview	
CJ2	80

Next-Generation Robots
ZEUS
GIGA
Automatic Tool Changer
1 kg
5 kg
10 kg
20 kg
40 kg
60 kg
70 kg
100 kg
150 kg
220 kg
300 kg
Press Handling Specification
100 kg
Spot-Welding Gun-Changer
300 kg
Options
Wire-Saving module / Contact Block
Non-contact electric signal block
A mechanical safety valve prevents tool plate drops
Option List
Product Overview
Rotary Joint
PN-ZERO Series
Wrist Compliant
RCC DEVICE / LOCK-UP RCC DEVICE
Couple Joint
CJ2

BL QUICK-CHANGE

Increased Productivity and Cost Effectiveness Enhanced Robot Flexibility

The **BL QUICK-CHANGE** is a device for automatic tool changing, designed to enable robots and automated equipment to automatically change end-effectors or other peripheral tooling

With the quick and reliable tool changing provided by the **BL QUICK-CHANGE**, a single robot can perform a variety of tasks and reduce setup time, thus increasing actual production line efficiency and cost effectiveness.

The **BL QUICK-CHANGE** can be used under maximum load capacity, maintaining the positional repeatability specified in each model, thanks to the built-in safety in its design.

Fast, Durable, Accurate — Reliable

Description

Master plate

Master plate is installed on the robot end-of-arm and couples/uncouples with the Tool plate.
The Master plate includes a pneumatically-driven ball-locking mechanism. Its pneumatic ports and electrical contacts pass air and signals to the Tool plate and end-effector. (Note)

Tool plate

Tool plate is attached to each end-effector. Its pneumatic port and electrical contacts receive air and signals from the Master plate and robot. The number of Tool plates and end-effector is the same, as one Tool plate is attached to each-effector. (Note)

(Note) On some models, pneumatic ports and electrical contacts are optional.

Applications

- Assembly
- Material Handling
- Palletizing
- Deburring
- Polishing
- Material Handling Welding
- Spot-welding Gun Exchange

Feature

Superior Fall-safe Locking Mechanism

The balls on the Master plate pneumatically lock into the Tool plate locking ring. They remain locked even if pneumatic pressure is accidentally shut off, ensuring that tools are not dropped under almost any conditions.

Excellent Positional Repeatability

The Master and Tool plates lock in the same position, even after one million operating cycles.
(In accordance with JIS B 8432, Industrial Robotics Standards, Function Measurement Method.)

Moment Resistance Rigidity

The ball-locking mechanism enables the plates to withstand 2G of acceleration under ordinary operation and 5G when the robot stops in an emergency.

Large Misalignment Correction Capability

The unique design allows coupling of the Master and Tool plates, even if plates are misaligned, and allows for the plates to lock together with a gap between them.


BL Quick-Change Model Selection

Selection by Moment

- Make sure to select a model within the specified tooling payload capacity and allowable static moment.
- Allowable static moment is the moment applied to the Quick-Change in the bending. (TX, Ty) and twisting (Tz) directions when the robot is not moving. Whatever position the robot is in, the specified maximum allowable moment must not be exceeded.
- If the static moments in both the bending and twisting directions are applied to the Quick-Change at the same time, each must not exceed their allowable moment, and their combined moments (※1) must not exceed the higher of the two moments.
- The allowable static moment shown in this catalogue is assuming up to 2G of acceleration, including acceleration at the end-effector's center-of-gravity, when the robot is in operation, and up to 5G when the robot stops in an emergency.

Allowable dynamic moment is twice the allowable static moment in both the bending and twisting directions under ordinary operation.

Calculation Example (Model : Flex-100B)

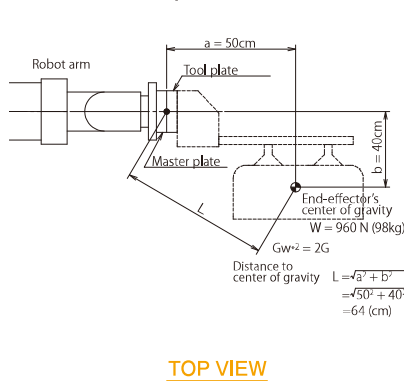

Allowable Static Moment for Each Model

Model	Load capacity	Allowable Static Moment(Nm)※1	
		Twisting Direction	Bending Direction
QC-1	9.8N(1kg)	4	16.6
Light-5A	49N(5kg)	25.4	33.2
QC-10B	98N(10kg)	49	68.6
QC-20D	196N(20kg)	113.6	156.8
Flex-40B	392N(40kg)	314	430
QC-60D	588N(60kg)	392	588
Flex-70A	686N(70kg)	686	784
Flex-100B	980N(100kg)	1372	1372
QCP-100A	980N(100kg)	1372	1372
USP-100A	980N(100kg)	980	980
QC-150C	1,470N(150kg)	1960	1960
QC-220	2,156N(220kg)	3332	3332
Flex-300A	2,940N(300kg)	5292	4704
GC-300A	2,940N(300kg)	5292	4704
ZEUS	2,254N(230kg)	3332	3332
GIGA	6,860N(700kg)	7840	5880



Remarks

- In the graph at left, the allowable static moment is within the enclosed area from the zero point to the curved line for each model.
- When the end-effector or the payload rotates, the load applied to the Quick-Change by inertia moment must also be considered. If the distance between the Quick-Change and the end-effector's center-of-gravity is far, for example, in press handling applications, please contact BL Autotec, Ltd.
- If locating pins are not used, moment characteristics may not be obtainable.

Flex-100B Specifications

Load capacity		980N (100kg)
Dynamic static moment (when coupled)	Bending direction	1,372N·m(140kgf·m)
	Twisting direction	1,372N·m(140kgf·m)

Weight of end-effector and payload

W=960N (98kgf) ≤980N (100kgf)

Dynamic moment ※2

Bending direction $M_b=W \times a \times Gw^{※2}=960 \times 0.50 \times 2=960 \text{ N} \cdot \text{m} \leq 1372 \text{ N} \cdot \text{m}$

Twisting direction $M_t=W \times b \times Gw^{※2}=960 \times 0.40 \times 2=768 \text{ N} \cdot \text{m} \leq 1372 \text{ N} \cdot \text{m}$

Combined ※3 $M_c=\sqrt{M_b^2+M_t^2}=\sqrt{960^2+768^2}=1230 \text{ N} \cdot \text{m} \leq 1372 \text{ N} \cdot \text{m}$

Decision for use

This calculation indicates that the Flex-100B may be selected.

※1 Allowable dynamic moments are the stated values when pneumatic pressure is 0.49Mpa.

※2 Maximum acceleration including gravitational acceleration when the robot is in operation.

※3 Absolute values of vectors of composition in bending and twisting directional moments must not exceed the larger value of allowable dynamic moment of either bending or twisting direction.

QUICK-CHANGE ZEUS™ for Next-Generation Robots

QUICK-CHANGE ZEUS™

QUICK-CHANGE ZEUS™ is available such as spot-welding gun exchange, material handling and tool changing. It can use for robot payloads of 150-230kg. ZEUS incorporates the proven locking mechanism of the BL Quick-Change. It is a new, advanced Quick-Change, and ZEUS is light weight and thinness when coupled.

Compact, Light, Thin!

The weight has been reduced by 50% and the outer dimension is 70% compared with our Servo Gun Changer for 220kg payloads. It is only 110mm thick when coupled, which minimizes stress on the robot. The round shape reduces interference by the wiring and hose on the robot arm.

Enhanced mechanical fail-safe function!

Our proven mechanical fail-safe mechanism has been further enhanced with the addition of a spring back-up for greater reliability, so the Master and Tool Plates will not separate, even if pneumatic pressure fails.

Conforms to ISO standards for robot flanges!

The bolt patterns on ZEUS match the ISO 9409 "mechanical interface" for pitches of ϕ125mm and ϕ160mm. It can be installed on almost all industrial robots with 150-230 kg capacity. We can custom-manufacture to suit other robot flanges.

Standard equipped lock/unlock sensor & LED indication!

A lock/unlock sensor and LED indications for "lock" or "unlock" are standard equipped on ZEUS, and an approach sensor (with LED indication) useful for teaching is available as an option.

Resolves communication errors!

Resolves servo signal communication errors with a plug-in module.

Various options available!

Options, such as fool-proof valves for drop prevention in predefined positions, solenoid valves and field bus systems are available. Please contact us for details.



Master plate (ZEUS-M1N-SEAM-FL6BM-WPCM-IS-AS-XN)



Tool plate (ZEUS-T-SEAT-FL6BT-WPCT-X)

Specifications

Main body			
Weight capacity (Rated load)		1,470~2,254N(150~230kg)	
Positioning repeatability		±0.025mm	
Allowable dynamic moment	Bending direction (Tx,Ty)	3,332 N · m (340kgf · m)	
	Torsional direction (Tz)	3,332 N · m (340kgf · m)	
Coupling force (at 0.49MPa air pressure) ※1		27,444N(2,800kgf)	
Material	Frame	Aluminum alloy	
	Lock/unlock mechanism	stainless steel	
Outer dimension (When coupled)		φ226×H110 mm	
Product weight (Main body)	Master Plate	5.4kg	
	Tool Plate	2.3kg	
Electric signal connection (Built-in)	Connector (Master side)	5A×20	D/MS3102A24-28P
	Connector (Tool side)	※2	D/MS3102A24-28S
Lock/unlock mechanism		Ball-locking mechanism	
Lock/unlock operation required air pressure		0.39 ~ 0.68MPa (4 ~ 7kgf/cm²)	
Allowable temperature and humidity range		0 ~ 50°C, 35 ~ 90% (Non-condensing)	
Lock/unlock sensor	Lock status	1 built-in proximity switch	
	Unlock status	1 built-in proximity switch	
Insulation plate set	Model	With/without insulation plate	
	IS	Insulation plate (Fiber-reinforced Bakelite)	
	IN	Without insulation plate	

Accessories for master plate (in case of Master plate is IN02) ※Select necessaryplates and options based on an application or a robot flange.

In case of type of Master plate is M1(PCD125) (M1)...Stepped Parallel Pin(ϕ10×25)×2pcs, Hexagon socket bolt(custom) (M10×65)×6pcsWasher(ϕ14)×6pcs
In case of type of Master plate is M2(PCD160) (M2)...Stepped Parallel Pin(ϕ10×25)×2pcs, Hexagon socket bolt(custom) (M10×50)×6pcsHexagon socket bolt(custom) (M10×20)×6pcs, Washer(ϕ14)×12pcs,
(M3)...Stepped Parallel Pin(ϕ10×25)×2pcs, Hexagon socket bolt(custom) (M10×50)×6pcsHexagon socket bolt(custom) (M10×20)×6pcs, Washer(ϕ14)×6pcs,
Washer(for M12)×6pcs


(※1)Coupling force means force which assure repeatability, coupling of Quick changeis kept until supplying air for uncoupling or destroyed by crush. (※2)Max.93.6A is allowed as connector

Over 1 million combinations available to meet your needs with flexible options!

May be used wiht conventional Quick Change modules.



Drop-prevention valve [Mechanical fool-proof system]

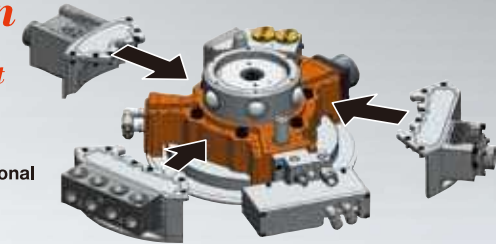

Optional safety system In case of lock/unlock solenoid valve malfunction. The Tool plate will not release from the Master plate except when it is located above the tool stand.



Lock/unlock Solenoid valve

A lock/unlock solenoid valve attached to the Master plate is available as an option.

Option

Module for A side and B side

	Model	Capacity and number of contacts	Connector for Master Plate side	Connector for Tool Plate side
Servo module	SEAM(T) SEBM(T)	Servo powers 20A(500V)×6 ※1 Electric signals 5A(220V)×17 ※2	D/MS3102A20-17P D/MS3102A20-29P	D/MS3102A20-17S D/MS3102A20-29S
	SEYAM(T) SEYBM(T)	Servo powers 20A(500V)×6 ※5 Electric signals 5A(220V)×17 ※2	D/MS3102A20-15P D/MS3102A20-29P	D/MS3102A20-15S D/MS3102A20-29S
	SEPAM(T) SEPB(M)(T)	Servo powers 20A(500V)×6 ※1 Electric signals 5A(220V)×17 ※2 Electric signals 5A(220V)×37 ※6	D/MS3102A20-17P D/MS3102A20-29P D/MS3102A28-21P	D/MS3102A20-17S D/MS3102A20-29S D/MS3102A28-21S
Fluid module ※3	FL4AM/FL4BM FL4AT/FL4BT	4 ports	Master Plate side Tool Plate side	4 ports Rc3/8(self-sealing) for both of coolant and pneumatic
	FP4AT/FP4BT		Tool Plate side	4 ports Rc3/8(pass-through)for pneumatic
	FL6AM/FL6BM FL6AT/FL6BT	6 ports	Master Plate side Tool Plate side	6 ports Rc3/8(self-sealing)for both of coolant and pneumatic
	FP6AT/FP6BT		Tool Plate side	Rc3/8×6(pass-through)
Pneumatic port	P38AM(T) *	4 ports	Rc3/8×4(pass-through)	
Electric signal module	JXAM(T) * JXBM(T) *	5A×16 ※7	JMR-2116M-D	JMR-2116F-D
	RXAT * RXBT *	5A×16 (without connector) ※9		terminal for solder
	MWXAM(T) MWXBM(T)	13A×10 Resistance to dust and wator	D/MS3102A18-1P	D/MS3102A18-1S
	BNXAM(BDXAT) * BNXBM(BDXBT) *	non-contact electric signal 15 NPN output	WEBR2119MS-D	WEBR2116FS-D
	BPXAM(BDXAT) * BPXBM(BDXBT) *	non-contact electric signal 15 PNP output	WEBR2119MS-D	WEBR2116FS-D
Ground contact module	E51AM(T) * E51BM(T) *	500A×1 (usage : 50%)		
Attachment module	GLAM(T) GLBM(T)	Attachment module for A or B side. (For adding conventional Quick change options)		
Cover	LCAM(T) LCBM(T)	Cover for A side or B side (always use cover when the modules are not in use)		

*Include attachment module

(※1)Allowable current is Max.20A for pin(13A for pin No.F) and total allowable current is 71.6A for connector. (※2)Allowable current is total 81.7A for connector. (※3)Port with self-sealing of Fluid module cannot be used for vacuum. (※4)Allowable current is total 290.6A for connector. (※5)Allowable current is total 83.7A for connector, Connector has 7 pins. (※6)Allowable current is total 120.2A for connector. (※7)Allowable current is total 30.4A for connector. (※8) Allowable current is total 57.2A for connector. (※9)Type of connector for master side is JMA.

In case of order options as part, model might be different from the above table. Please ask to our company's staff.

Ordering Information

Master plate

ZEUS -M1N-
-M2N-
-M3N-
-M1P-
-M2P-
-M3P-

Module for A-side

Module for B-side

Module for C-side

Insulation plate (Adaptor plate with boss)

Approach sensor

Drop-prevention valve Lock/unlock Solenoid valve

→ PCD mounting robot type of sensors PNP or NPN (for lock/unlock and approach)

M1=PCD125mm,M10
M2=PCD160mm,M10
M3=PCD160mm,M12
N =Sensor output NPN
P =Sensor output PNP

IS	With insulation plate Without insulation plate, knock pin x 2	AS	With approach sensor Without approach sensor (Master Plate side only)	VE	With valve for prevent releasing tool plate With solenoid valve for lock/unlock ※
IN02	Without insulation plate, inlay ϕ50 n7	AN		VN	With valve Without solenoid valve
IN50	Without insulation plate, inlay ϕ63 n7			XE	Without solenoid valve ※
IN63	Without insulation plate, inlay ϕ63 n7			XN	Without valve Without solenoid valve
IN80	Without insulation plate, inlay ϕ80 n7				※When you add solenoid valve, usable electric signal(Built-in) are limited upto 18.
IN10	Without insulation plate, inlay ϕ100 n7				
INAB	For ABB robot (Boss ϕ100) n7				

Tool plate

ZEUS -T-

Module for A-side


Module for B-side

Module for C-side

[Servo module]		[Pneumatic port]		[Primary current module]		[Electric signal module]	
SE	Servo power 20A×6 ※1 Electric signal 5A×17 ※2	P38	Pneumatic Rc3/8×4	WP	200A(usage: 25%) 600V Sequence 100A(600V)×3 ※4 Thermo signal: 5A(200V)×3 (WP : receptacle type / WS : seal connector type)	J	J16A module 5A×16
SEY	Servo power 20A×6 ※1 Electric signal 5A×17 ※2 Connector for motor has 7pins	LC	Covers for A and B (always use the over when the modules are not in use)	WS		R	5A×16 (without connector) for Tool Plate
SEP	Servo power 20A×6 ※1 Electric signal 5A×17 ※2 Electric signal 5A×37 ※6 37prove contacts is added in servo module	[Electric signal module]		SC	Cover for C side (always use the cover when the modules are not in use)	M	13A×10 (insertion contact)
LC	Covers for A and B (always use the over when the modules are not in use)	J	J16A module 5A×16			MW	13A×10 Resistance to dust and wator
		R	5A×16 for Tool Plate			BN	non-contact electric signal15 NPN output (available for master plate only)
		MW	13A×10Resistance to dust and wator			BP	non-contact electric signal15 PNP output (available for master plate only)
		BN	non-contact electric signal15 NPN output for Master Plate			BD	non-contact electric signal15 Sensor input (available for tool plate only)
		BP	non-contact electric signal15 PNP output for Master Plate			SC	Cover for C side (always use the over when the modules are not in use)
		BD	non-contact electric signal 15 Sensor input for Tool Plate				
[Fluid module]		[Other]		[Pneumatic port]		[Other]	
FL4	4 cooling water ports or pneumatic port	E51	500A×1	P18	Pneumatic Rc1 / 8 × 4		
FP4	4 pneumatic ports for Tool Plate	GL	Attachment module	P3W	Pneumatic Rc3 / 8 × 2		
FL6	6 cooling water ports or pneumatic port	LC	Covers for A and B (always use the over when the modules are not in use)	SC	Cover for C side (always use the over when the modules are not in use)		
FP6	6 pneumatic ports for Tool Plate						
LC	Covers for A and B (always use the over when the modules are not in use)						

Drop-prevention valve		Drop-prevention valve	
V	With valve prevent releasing tool plate	V	With valve prevent releasing tool plate
X	Without valve for prevent releasing tool plate	X	Without valve for prevent releasing tool plate

Installing position

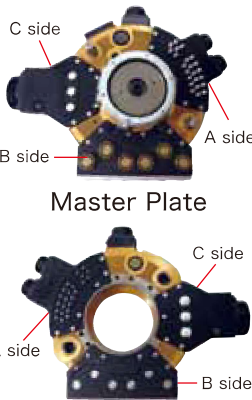

Please contact BL Autotec, Ltd. for detailed information on the options.

- The electric connector and plugs are user-provided. • Please contact BL Autotec, Ltd. for detailed information on the modules.
- Please contact BL Autotec, Ltd. for special conditions and specific applications. • Please refer to the Installation & Maintenance Manual when using.
- The contents of this catalog are subject to change without notice. Check with BL Autotec for updated catalog content if your catalog was issued more than one year ago.
- This catalog is note be reproduced, in whole or in part, without the express permission of BL Autotec.

The configuration and specifications for this series are subject to change.

New-Generation Heavy Payload QUICK-CHANGE

QUICK-CHANGE GIGA™

GIGA is a device for automatic tool changing, designed for robots handling heavy-payloads, with weight capacities of 350kg, 400kg, 500kg, and 700kg. GIGA is used for body in white handling and jig base changing in the automotive industry. It is also used in other industries for heavy load palletizing, and loading and unloading of CNC machines. In addition to handling applications, GIGA can be used in spot-welding gun changing applications. GIGA can also use our QUICK-CHANGE ZEUS Series modules.

Lock without touching

The Master plate can lock onto the Tool plate with a gap between them

Enhanced mechanical fail-safe function!

Our proven mechanical fail-safe mechanism has been further enhanced with the addition of a spring back-up for greater reliability, so the Master and Tool Plates will not separate, even if pneumatic pressure fails.

Conforms to ISO standards for robot flanges!

The GIGA bolt pattern is compatible with heavy payload robot flanges.
Bolt pattern: PCD 200, M12×6 pcs

Safety feature: fool-proof

Built-in lock/unlock sensor (selection NPN/PNP)
Built-in approach sensor (detecting clearance of Tool Plate)
Standardly equipped mechanical safety valve that allows Tool Plate to separate from Master Plate only at a certain spot on tool stand.

Master plate
(GIGA-MN-SEAM-FL6BM-WPCM-SCDM-VE)



Tool plate
(GIGA-T-SEAT-FL6BT-WPCT-SCDT-V)

Specifications

Main body					
Load capacity (Rated load)		6,860N(700kg)			
Positional repeatability		±0.025mm			
Allowable dynamic moment	Bending direction (Tx,Ty)	7,840N・m(800kgf・m)			
	Twisting direction (Tz)	5,880N・m(600kgf・m)			
Coupling force (at 0.49MPa air pressure) ※a		63,239N(6,453kgf)			
Material	Frame	Aluminum alloy			
	Lock/unlock mechanism	stainless steel			
Overall dimension (When coupled)		φ350×H160mm			
Product weight (Main body)	Master Plate	25kg			
	Tool Plate	15kg			
Electric signal connection (Built-in)		Connector(Master side)	5A×20	D/MS3102A24-28P	
		Connector(Tool side)	※b	D/MS3102A24-28S	
Lock/unlock mechanism			Ball-locking mechanism		
Lock/unlock operation required air pressure			0.39~0.68MPa (4~7kgf/cm²)		
Allowable temperature and humidity range			0~50°C, 35~90% (Non-condensing)		
Lock/unlock sensor	Lock status	1 built-in proximity switch			
	Unlock status	1 built-in proximity switch			
Drop prevention valve			Mechanical Valve		

Accessories for master plate

W/O insulation (IN12 or IN16)→parallel pin (φ12×22)×1pc, bolts (M12×90)×6pcs, flat washers (for M12 bolts, small)×6pcs, spring washers (for M12 bolts)×6pcs, resin collars (inner φ12.5)×6pcs
With insulation (IS)→insulation locating pins (φ12×30)×2pcs, bolts (M12×100)×6pcs, flat washers (for M12 bolts, small)×6pcs, spring washers (for M12 bolts)×6pcs, resin collars (inner φ12.5), insulation plate×1pc

(※a)Coupling force is the force to achieve specified repeatability.Coupling will be maintained until unlock pressure is applied or the device is damaged.
(※b)Max.93.6A is allowed as connector.

Option

■ Module for A side and B side

	Model	Capacity and number of contacts	Connector for Master Plate side	Connector for Tool Plate side
Servo module	SEAM (T) SEBM (T)	Servo powers 20A(500V)×6 ※1 Electric signals 5A(220V)×17 ※2	D/MS3102A20-17P D/MS3102A20-29P	D/MS3102A20-17S D/MS3102A20-29S
	SEYAM (T) SEYBM (T)	Servo powers 20A(500V)×6 ※5 Electric signals 5A(220V)×17 ※2	D/MS3102A20-15P D/MS3102A20-29P	D/MS3102A20-15S D/MS3102A20-29S
	SEPAM (T) SEPBm (T)	Servo powers 20A(500V)×6 ※1 Electric signals 5A(220V)×17 ※2	D/MS3102A20-17P D/MS3102A20-29P	D/MS3102A20-17S D/MS3102A20-29S
		Electric signals 5A(220V)×37 ※6	D/MS3102A28-21P	D/MS3102A28-21S
	FL4AM/FL4BM	Master Plate side	4 ports Rc3/8 (self-sealing) for both of coolant and pneumatic	
	FL4AT/FL4BT FP4AT/FP4BT	Tool Plate side	4 ports Rc3/8 (pass-through) for pneumatic	
Fluid module ※3	FL6AM/FL6BM	Master Plate side	6 ports Rc3/8 (self-sealing) for both of coolant and pneumatic	
	FL6AT/FL6BT FP6AT/FP6BT	Tool Plate side	Rc3/8×6 (pass-through)	
	P38AM (T) *	4 ports	Rc3/8×4 (pass-through)	
Electric signal module	JXAM (T) * JXBM (T) *	5A×16 ※7	JMR-2116M-D	JMR-2116F-D
	RXAT * RXBT *	5A×16 (without connector) ※9		terminal for solder
	MVXAM (T) MVXBM (T)	Resistance to dust and water 13A×10	D/MS3102A 18-1P	D/MS3102A 18-1S
	BNXAM (BDXAT) * BNXBM (BDXBT) *	non-contact electric signal 15 NPN output	WEBR2119MS-D	WEBR2116FS-D
	BPKAM (BDXAT) * BPKBM (BDXBT) *	non-contact electric signal 15 PNP output	WEBR2119MS-D	WEBR2116FS-D
	E51AM (T) * E51BM (T) *	500A×1 (usage : 50%)		
Attachment module	GLAM (T) GLBM (T)	Attachment module for A and B side. (For adding conventional Quick change options)		
Cover	LCAM (T) LCBM (T)	Cover for A and B side (always use cover when the modules are not in use)		

*include attachment module
(※1) Allowable current is Max.20A for pin(13A for pin No.F) and total allowable current is 71.6A for connector. (※2) Allowable current is total 81.7A for connector. (※3) Port with self-sealing of Fluid module cannot be used for vacuum. (※4) Allowable current is total 290.6A for connector. (※5) Allowable current is total 83.7A for connector. Connector has 7 pins. (※6) Allowable current is total 120.2A for connector. (※7) Allowable current is total 30.4A for connector. (※8) Allowable current is total 57.2A for connector. (※9) Type of connector for master side is JMA.

In case of order options as part, model might be different from the above table. Please ask to our company's staff.

Ordering Information

Master plate

GIGA

MN

MP

AM

BM

CM

DM

Module for A-side

Module for B-side

Module for C-side

Module for D-side

Insulation plate
(Adaptor plate with boss)

Lock/unlock
Solenoid valve

IS With insulation plate
IN02 Without insulation plate,
knock pin x 2
IN12 Without insulation plate,
inlay φ125
IN16 Without insulation plate,
inlay φ160
(Master Plate side only)

VE With solenoid valve
for lock/unlock ※
VN Without solenoid valve
for lock/unlock
※When you add solenoid valve,
usable electric signal(Built-in)
are limited upto 18.

(MN=Sensor output NPN)
MP=Sensor output PNP)

※Bolt pattern of interface to robot flange is PCD 200mm, M12

Tool plate

GIGA

T

AT

BT

CT

DT

Module for A-side

Module for B-side

Module for C-side

Module for D-side

− V

[Servo module]

[Pneumatic port]

[Primary current module]

[Electric signal module]

[Pneumatic port]

[Fluid module]

[Other]

SE Servo power 20A×6 ※1
Electric signal 5A×17 ※2
SEY Servo power 20A×6 ※1
Electric signal 5A×17 ※2
SEP Servo power 20A×6 ※1
Electric signal 5A×17 ※2
LC Cover for A and B side
(always use the over when the
modules are not in use)

P38 Pneumatic Rc3/8×4

LC Cover for A and B side
(always use the over when the
modules are not in use)

J J16A module 5A×16

R 5A×16 for Tool Plate

MW 13A×10
Resistance to dust and water

BN Remote sensor 15
NPN output
(available for master plate only)

BP Remote sensor 15
PNP output for Master Plate

BD Remote sensor 15
Sensor input for Tool Plate

GL Attachment module

LC Cover for A and B side
(always use the over when the
modules are not in use)

WP 200A(usage: 25%) 600V
Sequence 100A(600V)×3 ※6
Thermo signal: 5A(200V)×3
(WP : receptacle type
WS : seal connector type)

P18 Pneumatic Rc1/8×4

P3W Pneumatic Rc3/8×2

SC Cover for C and D side
(always use the over when the
modules are not in use)

J J16A module 5A×16

R 5A×16 for Tool Plate

MW 13A×10
Resistance to dust and water

BN Remote sensor 15
NPN output
(available for master plate only)

BP Remote sensor 15
PNP output for Master Plate

BD Remote sensor 15
Sensor input for Tool Plate

GL Attachment module

LC Cover for A and B side
(always use the over when the
modules are not in use)

J J16A module 5A×16

R 5A×16 for Tool Plate

MW 13A×10
Resistance to dust and water

BN Remote sensor 15
NPN output
(available for master plate only)

BP Remote sensor 15
PNP output for Master Plate

BD Remote sensor 15
Sensor input for Tool Plate

GL Attachment module

LC Cover for A and B side
(always use the over when the
modules are not in use)

P18 Pneumatic Rc1/8×4

P3W Pneumatic Rc3/8×2

SC Cover for C and D side
(always use the over when the
modules are not in use)

FL4 4 cooling water ports
or pneumatic port

FP4 4 pneumatic ports
for Tool Plate

FL6 6 cooling water ports
or pneumatic port

FP6 6 pneumatic ports
for Tool Plate

LC Cover for A and B side
(always use the over when the
modules are not in use)

E51 500A×1

GL Attachment module

LC Cover for A and B side
(always use the over when the
modules are not in use)

[Other]

E51 500A×1

GS Attachment module

SC Cover for C and D side
(always use the over when the
modules are not in use)

Please contact BL Autotec, Ltd. for detailed information on the options.

- The electric connector and plugs are user-provided. • Please contact BL Autotec, Ltd. for detailed information on the modules.
- Please contact BL Autotec, Ltd. for special conditions and specific applications. • Please refer to the Installation & Maintenance Manual when using.

The configuration and specifications for this series are subject to change.

Installing position

Master Plate

Tool Plate

8

9

QC-1

QC-1 is automatic end-effector exchange device for light load robot for various applications like a assembling of precise electric device, precise machine and handling purpose in medical product, food product.

QC-1 is compatible for use on FANUC's "Genkotsu Robot"


The flange interface on FANUC's Genkotsu Robot 1M-1iA is PCD20(4-axis and 6-axis spacs), so QC-1 can be used on new or existing applications.

Lock without touching

The Master plate can lock onto the Tool plate with a gap between them.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

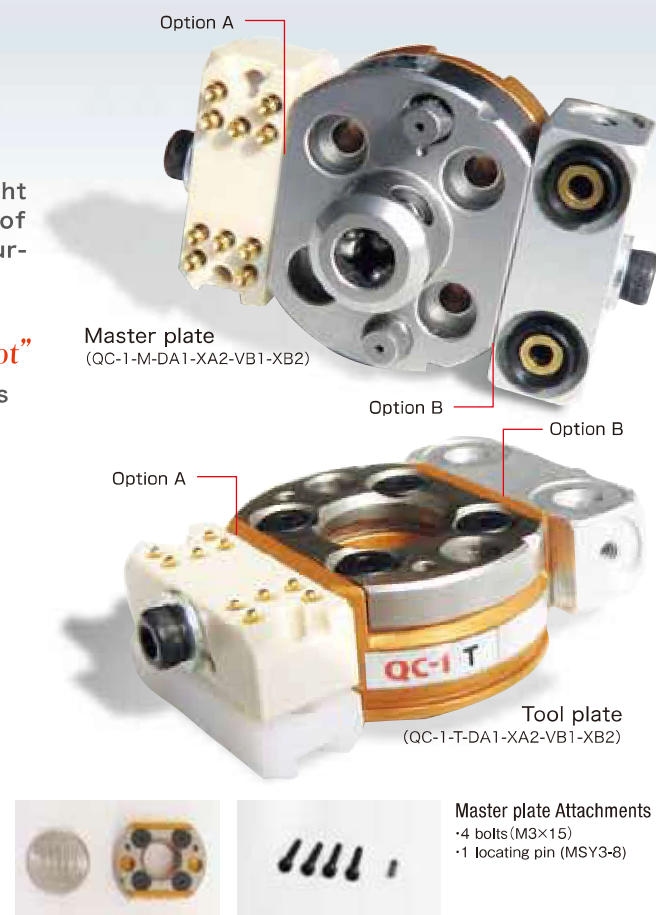


Specifications

Main Body		
Load capacity		9.8N(1kg)
Positional repeatability		±0.015mm
Allowable dynamic moment	Bending direction (Tx, Ty)	4N·m(40.8kgf·cm)
	Twisting direction (Tz)	16.6N·m(169.4kgf·cm)
Coupling force (with air pressure of 0.49MPa) ※1		185N
Materials	Frame	Aluminum alloy
	Lock/ unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ32xH29mm
Weight (Main body)	Master plate	60g
	Tool plate	30g
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa(4~7kgf/cm ²)
Allowable temperature and humidity ranges		0~50°C, 35~90%(Non-condensing)

Options

D	Electric signal contact block	3A×10(solder terminal)
P	Positive pneumatic ports	M3×2
V	Negative pneumatic ports	M3×2

● Installation position on options

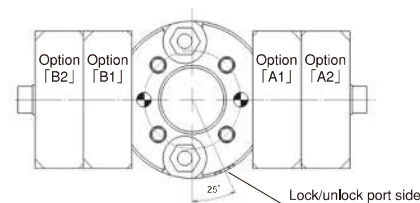

QC-1 Ordering Information


Master plate **QC-1** -M- (Option) ☐ A1 - ☐ A2 - ☐ B1 - ☐ B2

Tool plate **QC-1** - **T** - (Option)  **A1** -  **A2** -  **B1** -  **B2**

X	No option
D	Electrical signals 3A×10(solder terminal)
P	Positive pneumatic ports ※2
V	Negative pneumatic ports


(Note) Four options may be installed on the QC-1 (the A2 and B2 options available only if the A1 and B1 options are used).

Main Body Dimensions

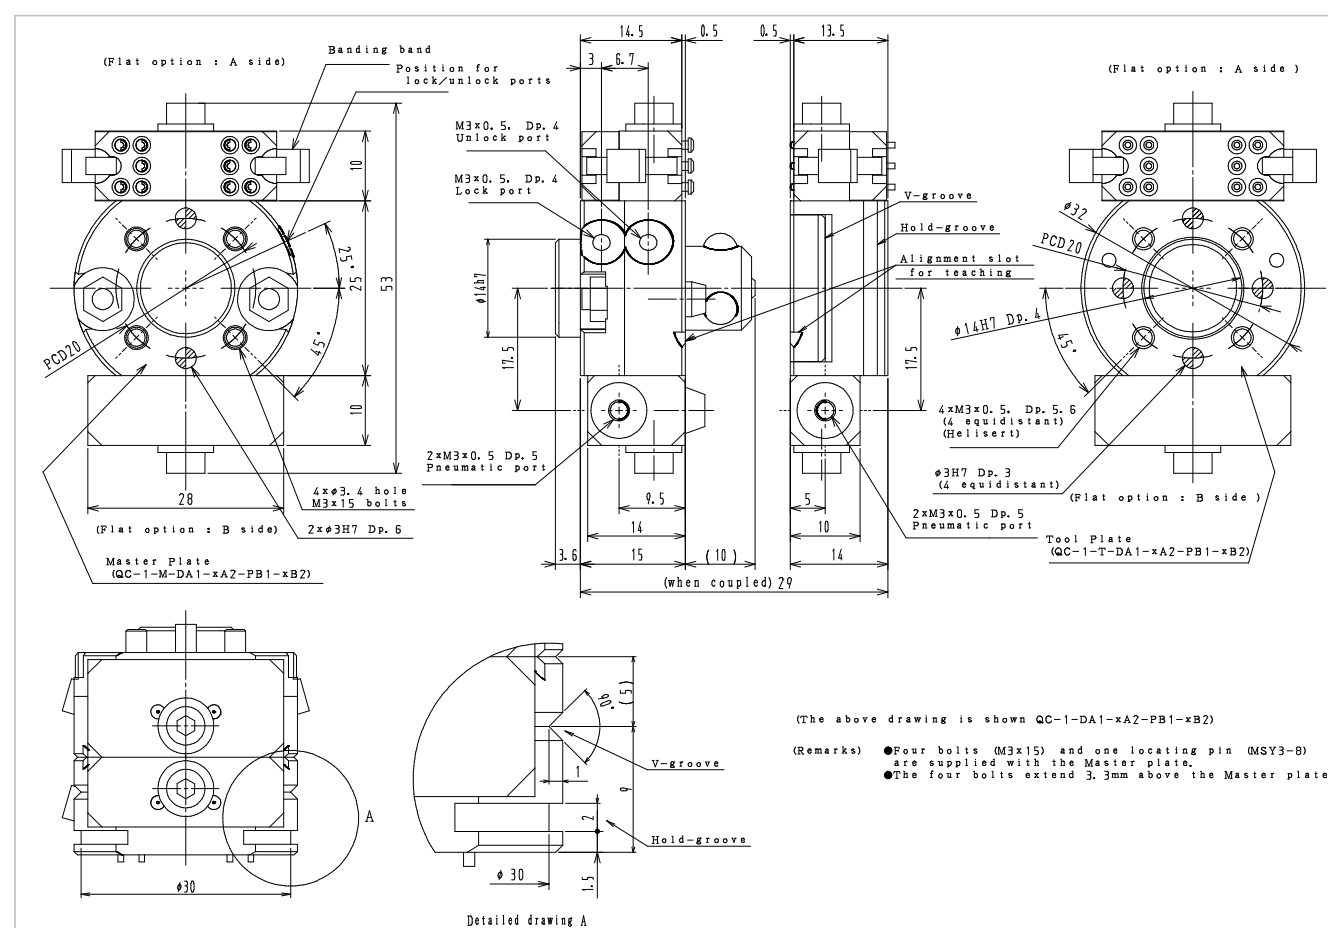


Options

■Electrical signal contact bloc



D 3A×10 (solder terminal)

■ Pneumatic pressure ports contact bloc

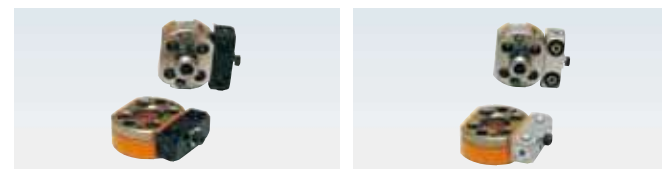

P For positive pressure M3x2

V For negative pressure M3x2

Please contact BL Autotec, Ltd. for detailed information on the options.

*1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or device is damaged. *2 If you request to add 2 pneumatic port block"P", please contact and discuss with BL Autotec before placing order.

Light-5A

The BL QUICK-CHANGE Model Light-5A is a device for automatic tool changing, specially designed for low payload capacity robots, generally used in the assembly and handling of electrical parts, precision equipment and mechanical parts. During the unlocking process, the Light-5A Master plate pushes the Tool plate off (self-separating function). An optional shaft receptacle adaptor is available with the Light-5A to attach it to a shaft-type robot.

Self-separating function

The Light-5A locking mechanism has been designed to push the Tool plate off during the unlocking process, providing reliable separation.


Lock without touching

The Master plate can lock onto the Tool plate with a gap between them.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

(Notice): Please refer to page 56 for the minimum clearance between the Master Plate and Tool Plate and the gap between the Tool Plate and tool stand for teaching.

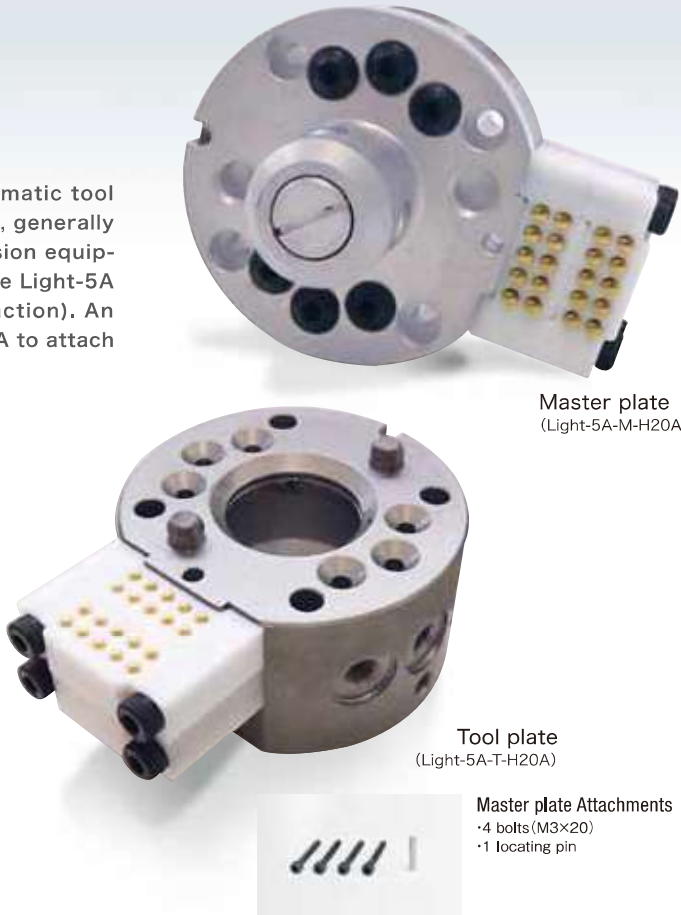

Master plate
(Light-5A-M-H20A)

Tool plate
(Light-5A-T-H20A)

Master plate Attachments
•4 bolts (M3×20)
•1 locating pin

Specifications


Main Body		
Load capacity (rated load)		49N(5kg)
Positional repeatability		±0.01mm
Allowable dynamic moment	Bending direction(Tx,Ty)	25.4N·m(260 kgf·cm)
	Twisting direction(Tz)	33.2N·m(340 kgf·cm)
Coupling force (with air pressure of 0.49MPa) ※1		612.5N(62.5kgf)
materials	Master plate	Stainless steel
	Tool plate	Aluminum alloy (The lock/unlock mechanism is stainless steel)
Overall dimension (when coupled)		φ49xH48.5mm
Weight (main body)	Master plate	260g
	Tool plate	100g
Self-separating mechanism		
Required air pressure		0.39~0.68MPa(4~7kgf/cm²)
Allowable temperature and humidity ranges		0~50°C, 35~90%(Non-condensing)
Utilities	Pneumatic ports	M5×6

Options			
Utilities	H10A	Electrical signals Max3A DC50V Probe contact	3A×10 (solder terminal)
	H20A		3A×20 (solder terminal)
	H30A		3A×30 (solder terminal)
	H10L		3A×10 (with 1m lead wires)
	H20L		3A×20 (with 1m lead wires)
Shaft receptacle adaptor		For shaft diameters of 8,9,10,11, 12,13,14,15,16,20,24 and 25mm	

Light-5A Ordering Information

Master plate	Light-5A	-M-	(Option)	(Shaft receptacle adaptor)
Tool plate	Light-5A	-T-	(Option)	
			XXXX	No adaptor
			SAOO	Shaft receptacle adaptor
			Note : ○○ is shaft diameter. (For example, for a diameter of φ8mm, use 08, for a diameter of φ16mm,use 16.)	
			XXXX	No electrical signal
			H10A	Electrical signals3A×10 (solder terminal)
			H20A	Electrical signals3A×20 (solder terminal)
			H30A	Electrical signals3A×30 (solder terminal)
			H10L	Electrical signals3A×10 (with 1m lead wires)
			H20L	Electrical signals3A×20 (with 1m lead wires)

Main Body Dimensions

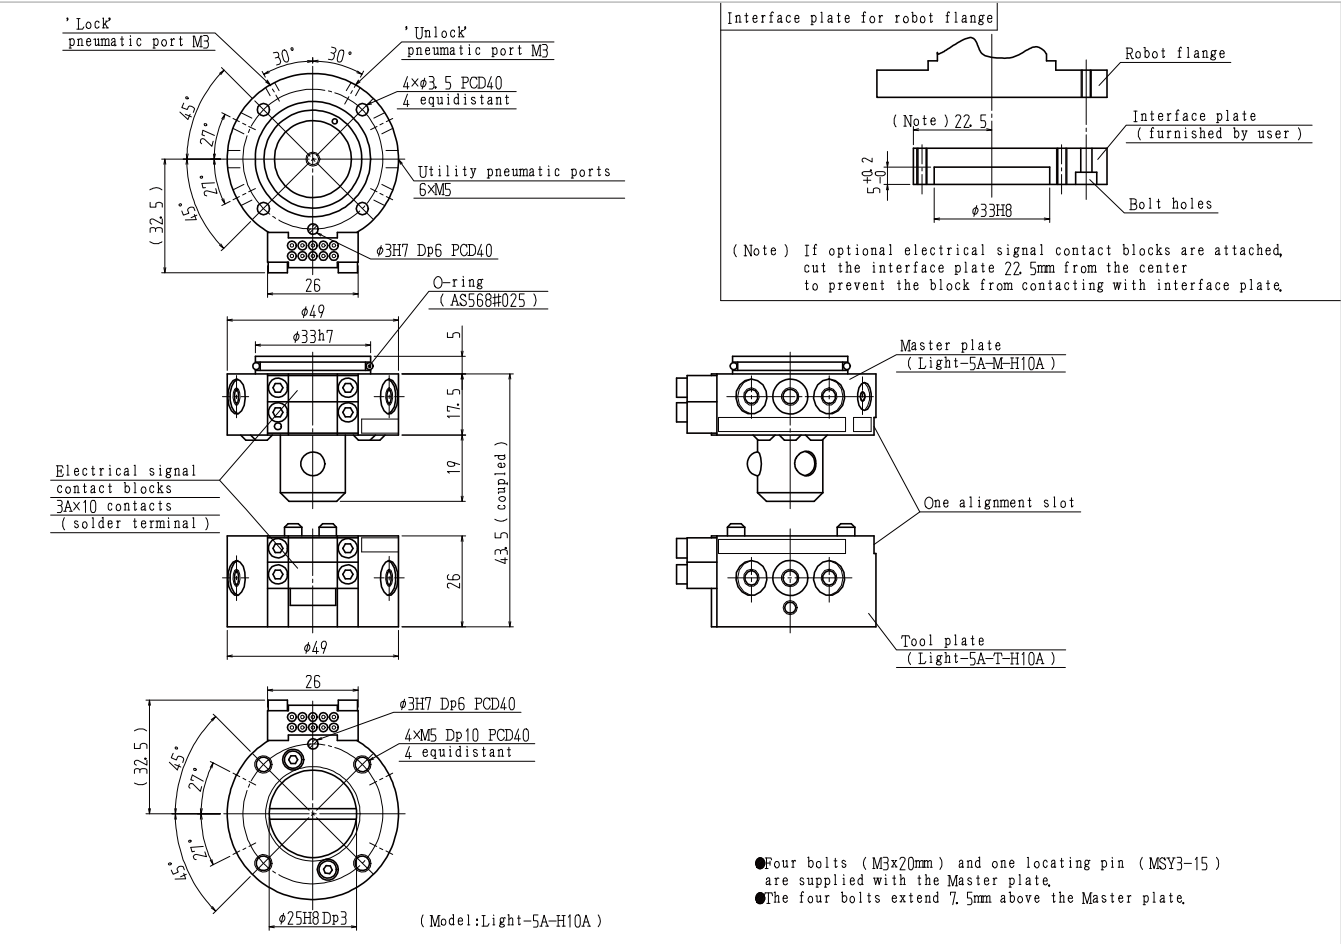

Options

■Electrical signal contact bloc



H10A
3A×10 (solder terminal)



H20A
3A×20 (solder terminal)



H30A
3A×30 (solder terminal)



H10L
3A×10 (with 1m lead wires)

■Shaft receptacle adaptor



H20L
3A×20 (with 1m lead wires)



SAOO
Adaptor for robots with shafts for mounting
Note : ○○ is shaft diameter.
(For example, for a diameter of φ8mm, use 08, for a diameter of φ16mm,use 16.)

Please contact BL Autotec, Ltd. for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or device is damaged.


QC-10B

Lock without touching

The Master plate can lock onto the Tool plate with a gap between them.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

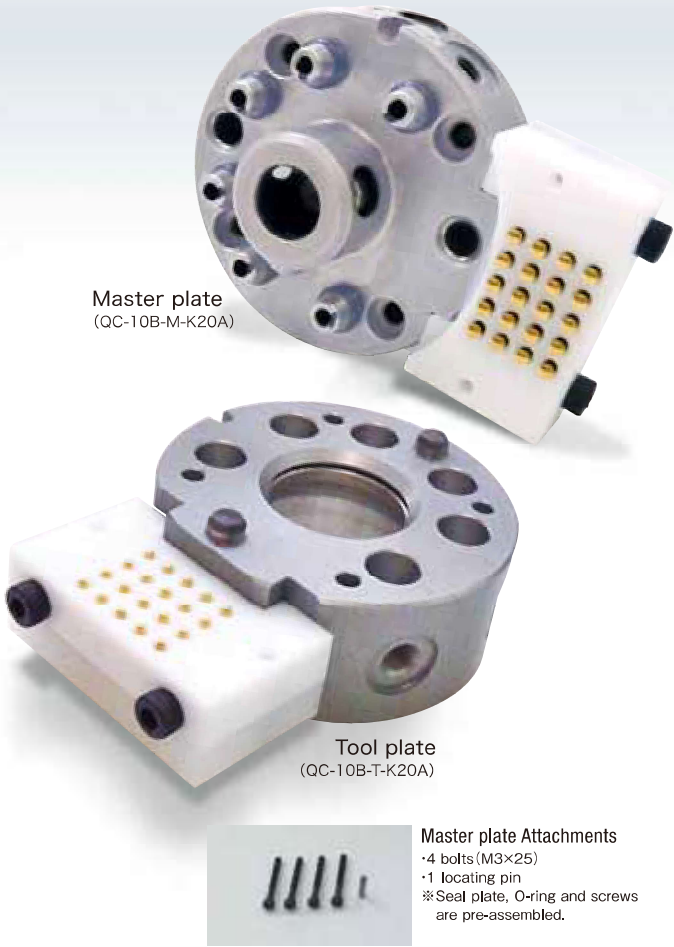

Master plate Attachments
• 4 bolts (M3×25)
• 1 locating pin
※ Seal plate, O-ring and screws are pre-assembled.

Specifications

Main Body		
Load capacity (rated load)		98N(10kg)
Positional repeatability		±0.01mm
Allowable dynamic moment	Bending direction (Tx, Ty)	49N·m(500kgf · cm)
	Twisting direction (Tz)	68.6N·m(700kgf · cm)
Coupling force (with air pressure of 0.49MPa) ※1		970.8N(99kgf)
Materials	Master plate	Stainless steel
	Tool plate	Aluminum alloy (The lock/unlock mechanism is stainless steel.)
Overall dimension (when coupled)		φ50×H38.5mm
Weight (Main body)	Master plate	245g
	Tool plate	85g
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa(4~7kgf/cm²)
Allowable temperature and humidity ranges		0~50°C, 35~90%(Non-condensing)
Utilities	Pneumatic ports	M5×6

Options			
Utilities	K10A	Electrical signals Max3A DC50V Probe contact	3A×10 (solder terminal)
	K20A		3A×20 (solder terminal)
	K10L		3A×10 (with 1m lead wires)
	K20L		3A×20 (with 1m lead wires)


QC-10B Ordering Information

Master plate **QC-10B -M-** (Option)

Tool plate **QC-10B -T-** (Option)

XXXXA	No electrical signal
K10A	Electrical signals 3A×10 (solder terminal)
K20A	Electrical signals 3A×20 (solder terminal)
K10L	Electrical signals 3A×10 (with 1m lead wires)
K20L	Electrical signals 3A×20 (with 1m lead wires)

Main Body Dimensions

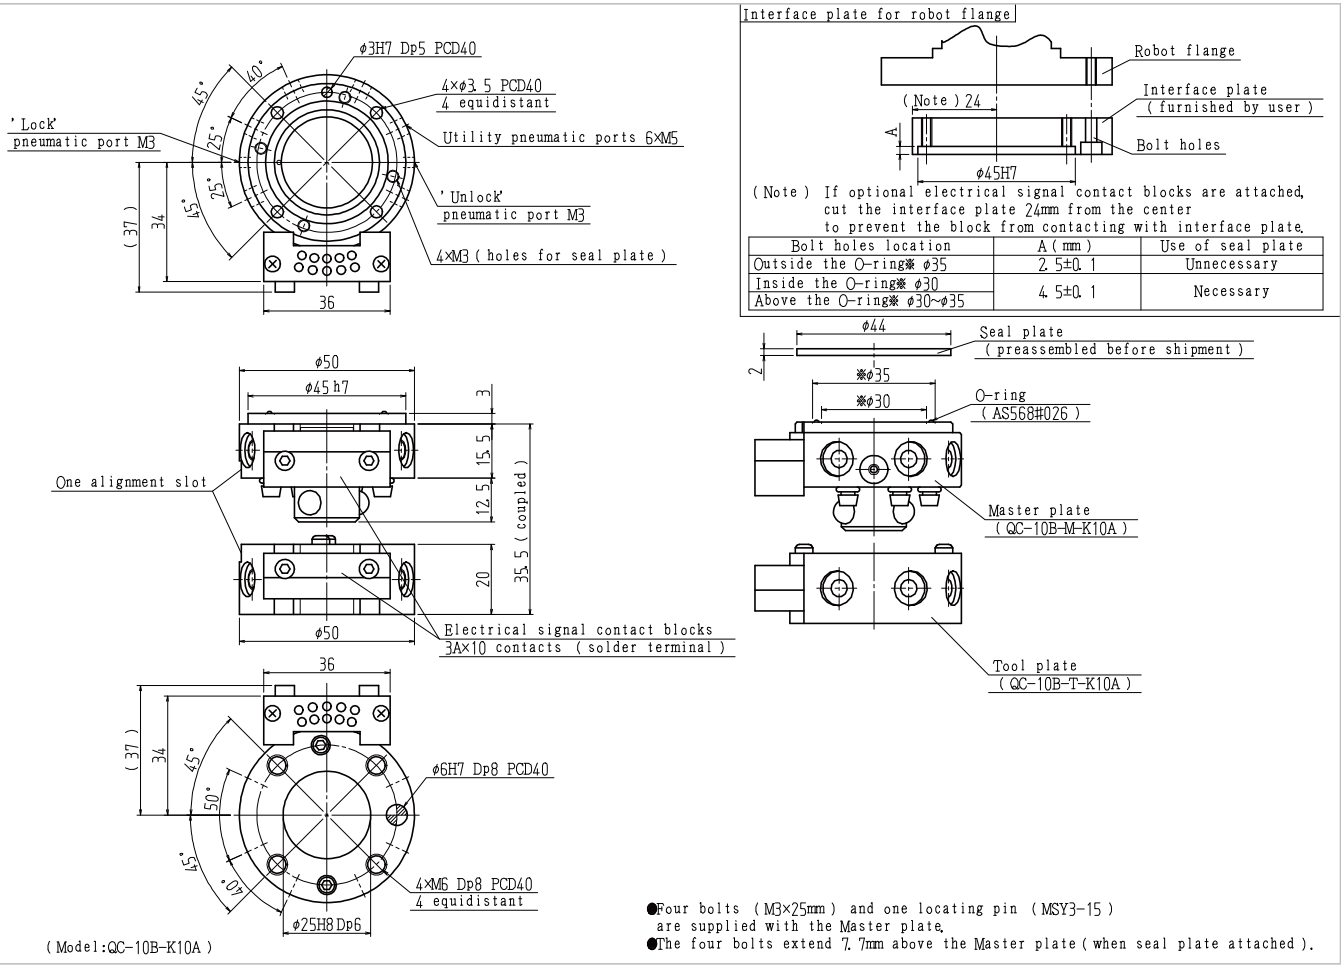

Options

Electrical signal contact block



K10A
3A×10 (solder terminal)



K20A
3A×20 (solder terminal)



K10L
3A×10 (with 1m lead wires)



K20L
3A×20 (with 1m lead wires)

Please contact BL Autotec, Ltd. for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or device is damaged.

QC-20D

Lock without touching

The Master plate can lock onto the Tool plate with a gap between them.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.



Master plate Attachments
•4 bolts (M4×30)
•1 locating pin
※ Seal plate, O-ring and screws are pre-assembled.

Specifications

Main Body			
Load capacity (rated load)		196N(20kg)	
Positional repeatability		±0.015mm	
Allowable dynamic moment	Bending direction (Tx, Ty)	113.6N·m(1,160kgf·cm)	
	Twisting direction (Tz)	156.8N·m(1,600kgf·cm)	
Coupling force (with air pressure of 0.49MPa) ※1		2,059N(210kgf)	
Materials	Frame	Aluminum alloy	
	Lock/unlock mechanism	Stainless steel	
Overall dimension (when coupled)		φ90×H45.4mm	
Weight (Main body)	Master plate	515g	
	Tool plate	355g	
Self-separating mechanism		Ball-locking mechanism	
Required air pressure		0.39~0.68MPa(4~7kgf/cm²)	
Allowable temty perature and humidity ranges		0~50°C, 35~90%(Non-condensing)	

Types			
Utilities	DXPA	Electrical signals	None
		Pneumatic ports	M5×8
	DXPB	Electrical signals	None
		Pneumatic ports	M5×12
	DAPA	Electrical signals Max3A DC50V Probe contact	3A×15 (D-sub connector) ※2
		Pneumatic ports	M5×8
	DAPB	Electrical signals Max3A DC50V Probe contact	3A×15 (D-sub connector) ※2
		Pneumatic ports	M5×12
	DBPA	Electrical signals Max3A DC50V Probe contact	3A×30 (D-sub connector) ※2
		Pneumatic ports	M5×8

QC-20D Ordering Information


Master plate **QC-20D** -M- (Type)

Tool plate **QC-20D** -T- (Type)

DXPA	No electrical signal	Pneumatic ports M5×8
DXPB	No electrical signal	Pneumatic ports M5×12
DAPA	Electrical signals 3A×15※2	Pneumatic ports M5×8
DAPB	Electrical signals 3A×15※2	Pneumatic ports M5×12
DBPA	Electrical signals 3A×30※2	Pneumatic ports M5×8

(Note) Please order D15N-M for the master side and model D15N-T for the tool side when ordering a contact block replacement.

Main Body Dimensions

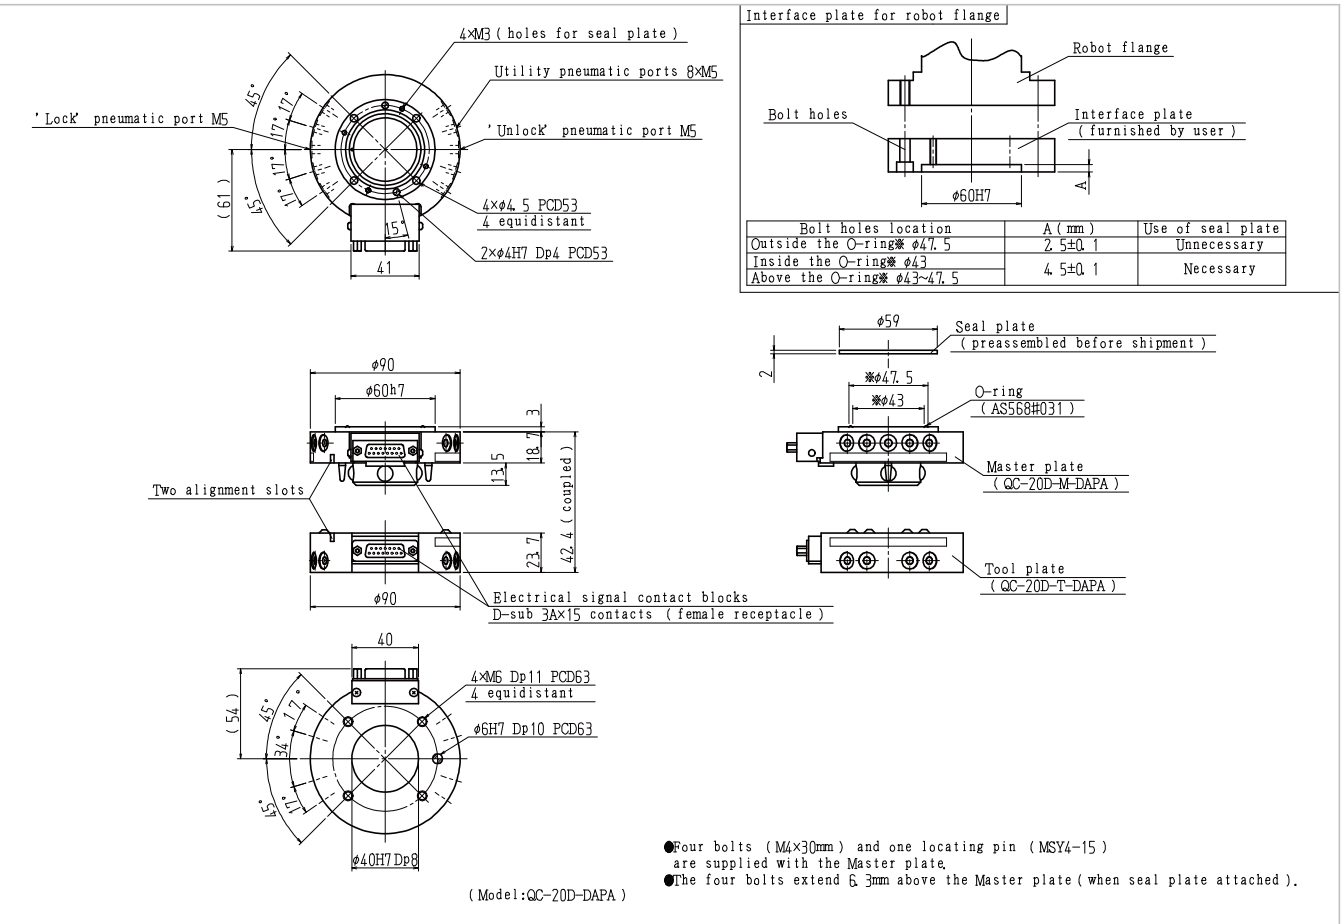

Types

■No electrical signal



DXPA

Pneumatic ports M5×8



DXPB

Pneumatic ports M5×12

■Electrical signals



DAPA

3A×15 D-Sub 15 contacts (female receptacle)※2
Pneumatic ports M5×8

※2 The connector plug DDK-17JE-23 150-02 (DBA)-CG, or its equivalent, is user-provided.



DAPB

3A×15 D-Sub 15 contacts (female receptacle)※2
Pneumatic ports M5×12



DBPA

3A×30 D-Sub 15 contacts (female receptacle)※2
Pneumatic ports M5×8

Please contact BL Autotec, Ltd. for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or device is damaged, contacts male screw plug M2.6)
※2. Please provide a 17JE-23150-02(DBA)-CG plug or its equivalent.(D-sub plugs are RoHS.)

QC-60D

Lock without touching

The Master plate can lock onto the Tool plate with a gap between them.


Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.



Master plate Attachments

- 6 bolts (M6×40)
- 1 locating pin
- ※ Seal plate, O-ring and screws are pre-assembled.

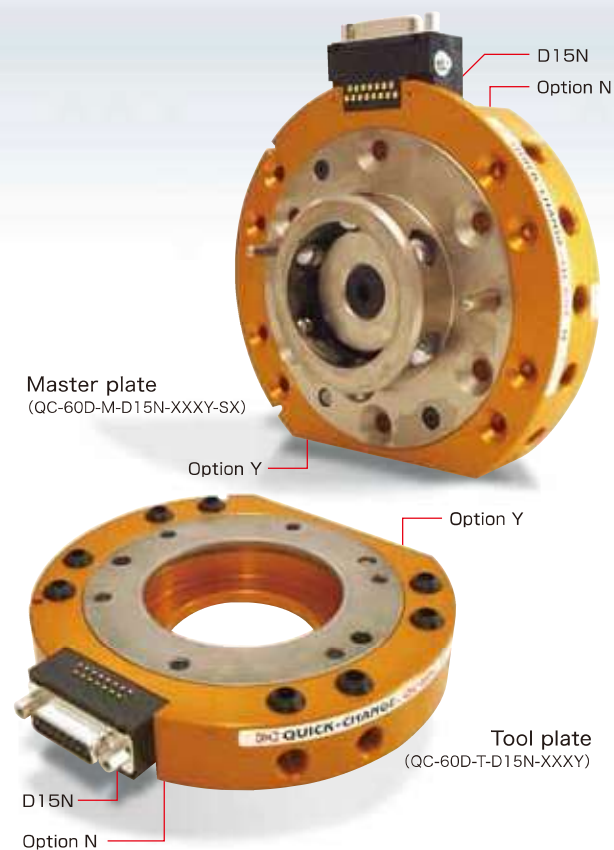

Specifications

Main Body		
Load capacity (rated load)		588N(60kg)
Positinal repeatability		±0.015mm
Allowable	Bending direction (Tx, Ty)	392N·m (40kgf·m)
dynamic moment	Twisting direction (Tz)	588N·m (60kgf·m)
Coupling force (with air pressure of 0.49MPa)		6.570N(670kgf) ※1
Materials	Frame	Aluminum alloy
	Lock/unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ130xH50mm
Weight (Main body)	Master plate	1,340g
	Tool plate	720g
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa(4~7kgf/cm²)
Allowable temperature and humidity ranges		0~50°C, 35~90%(Non-condensing)

Main Body		
Utilities	Electrical signals Max3A DC50V Probe contact	3A×15 or none ※2
	Pneumatic ports	Rc1/8×8

Options			
Utilities	D15Y	Electrical signals	3A×15 ※2
	J16Y	Electrical signals	5A×16 ※3 ※4
	M06Y	Electrical signals	13A×6 ※3 ※5
	M10Y	Electrical signals	13A×10 ※3 ※6
	B15NY	Electric signals	50mA×15
	B15PY	Max.50mA DC24V Non-contact system (Please refer to page 41 for details.)	WEB series connector ※3 In Zone 1 IP67
	B15DY	Electric signals Max.5mA DC12V Non-contact system (Please refer to page 41 for details.)	5mA×15 WEB series connector ※3 IP67
	P18Y	Pneumatic ports	Rc1/8×4
P14Y	Pneumatic ports	Rc1/4×2	
Lock / unlock sensor ※7		Two built-in proximity switches	

QC-60D Ordering Information

Master plate **QC-60D** **-M-** (Option N) **-** (Option Y) **-** (Lock / unlock sensor)


Tool plate **QC-60D** **-T-** (Option N) **-** (Option Y)

DXXN	No electrical signal
D15N	Electrical signals 3A×15※2
XXX Y	No option
D15 Y	Electrical signals 3A×15※2
J16 Y	Electrical signals 5A×16※3 ※4
M06 Y	Electrical signals 13A×6※3 ※5
M10 Y	Electrical signals 13A×10※3 ※6
B15N Y	Non-contact electric signal block Master side NPN output
B15PY	Non-contact electric signal block Master side PNP output
B15DY	Non-contact electric signal block Tool side
P18 Y	pneumatic ports Rc 1/8×4
P14 Y	pneumatic ports Rc 1/4×2

SX	No lock/unlock sensor
SA	Lock/unlock sensor A-Type (Customer processes the adaptor plate)
SB	Lock/unlock sensor B-Type (BL Autotec processes the adaptor plate)


(Note) Electric signal contact block types for QC-60D are shown at follows.
(Type of electric signal contact block when the Master side is D15N-M: the tool side is D15N-T.).

Main Body Dimensions

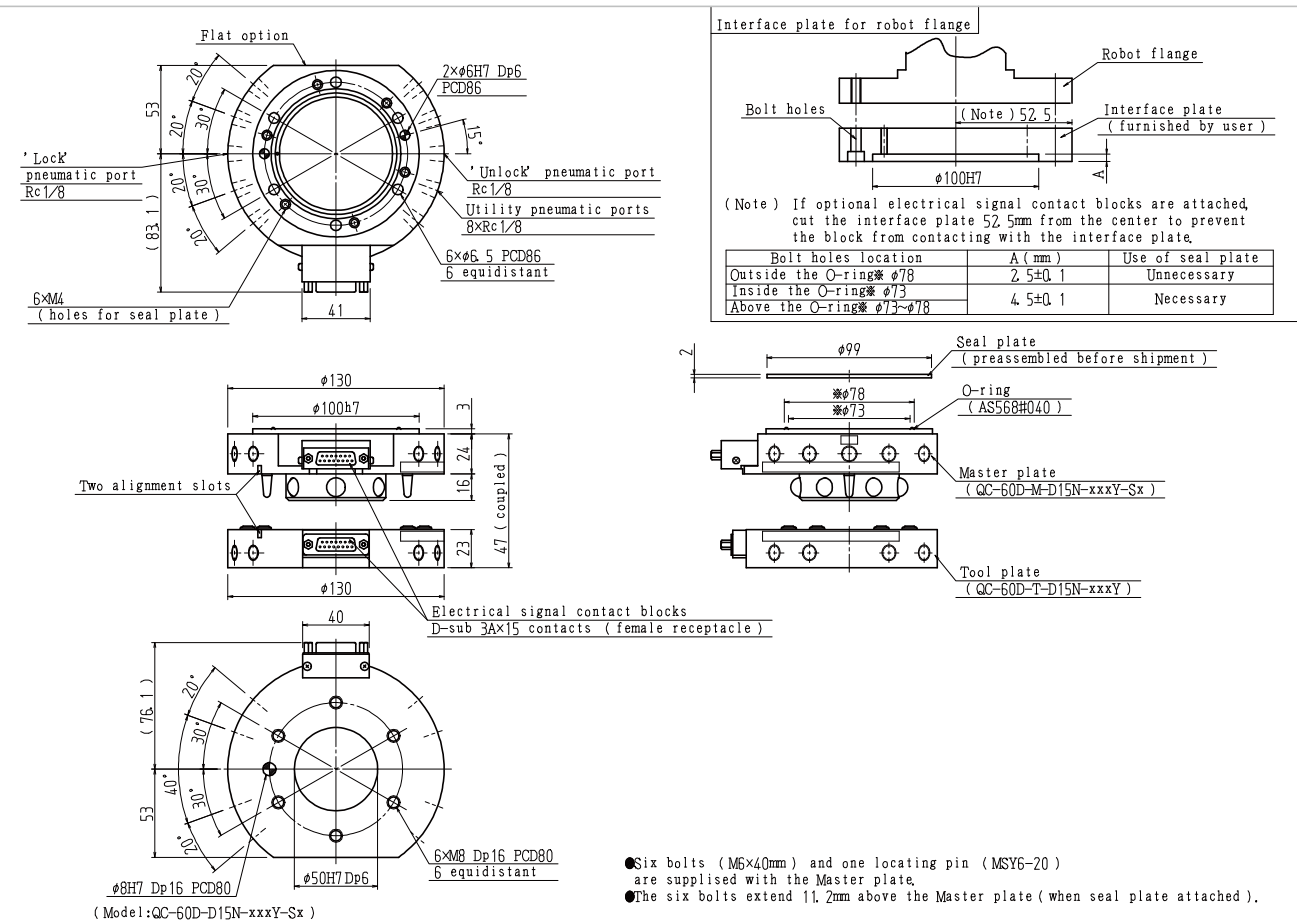


Options

■Electrical signal contact block

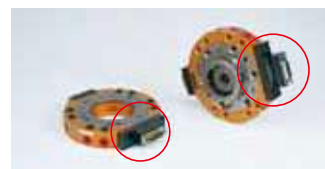

D15Y
3A×15 D-sub 15 contacts
(female receptacles)*2
*Plug side is DDK, 17 JE-23150-02 (D8A) -CG, or its equivalent.

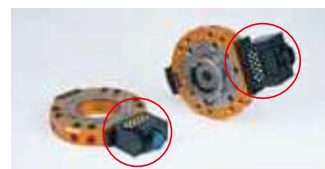

J16Y

5A×16 (JM connector)*3 *4

Use JMR2116M-D for the J16Y Master side
Use JMR2116F-D for the J16Y Tool side



M06Y

13A×6 (MS connector) ※3 ※5

Use D/MS3102A14S-6P for the M06Y Master side
Use D/MS3102A14S-6S for the M06Y Tool side



M10Y

13A×10 (MS connector)*3 *6

Use D/MS3102A18-1P for the M10Y Master side
Use D/MS3102A18-1S for the M10Y Tool side

■ Non-contact electric signal block




B15NY, B15PY (Master side only)
B15DY (Tool side only)


B15NY NPN output
 B15PY PNP output

Receptacle connector: WEBR-2119S-D for B15NY and B15PY
 Receptacle connector: WEBR-2116F-S-D for B15DY

■ Pneumatic ports

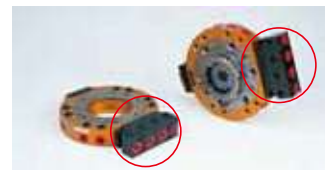

P18Y
Rc 1/8x4

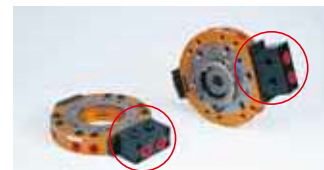

P14Y
Rc 1/4x2

■ Lock/unlock sensor



SA,SB

Two built-in proximity switches verify piston position, thus reliably checking the lock and unlock status.

Please contact BL Autotec, Ltd. for detailed information on the options.

※When you order the lock/unlock sensor please provide us with a drawing of the robot flange.

*1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. *2 Plug connector is not included. Please prepare plug connector type 17JE-23150-02(D8A)-CG or compatible type. *3 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. *4 Allowable current is total 30.4A for connector. *5 Allowable current is total 43.6A for connector. *6 Allowable current is total 57.2A for connector. *7 An option is available on the electric signal contact block (J16Y, M10Y) to connect the Lock/unlock proximity switch signal. Please contact us for additional information.

Flex-70A

Flex-70 is attached to the robot flange for quick and reliable exchange of end-effectors, such as tools. The ball-lock system in the Tool Plate is a sturdy specification, even for moment loads. A ground and approach sensor are now available as options in addition to conventional pneumatic ports, electric signals and a lock/unlock sensor. May be used in welding, press handling and deburring applications. Earth contact and electric signal module with approach sensor are added as option to usual electric signal contact blocks, pneumatic port blocks and lock/unlock sensor.

Heavy duty applications

For heavy duty applications, such as deburring, a special seal prevents dust from entering the locking mechanism and electrical contacts when the plates are coupled.

Various range of utilities


In addition to traditional air ports, electrical signals and a lock/unlock sensor, an approach sensor and a ground can be added.

Large misalignment correction capability

The unique design corrects misalignment when the Master and Tool plates couple. An approach sensor system, built into the plates, verifies coupling capability.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

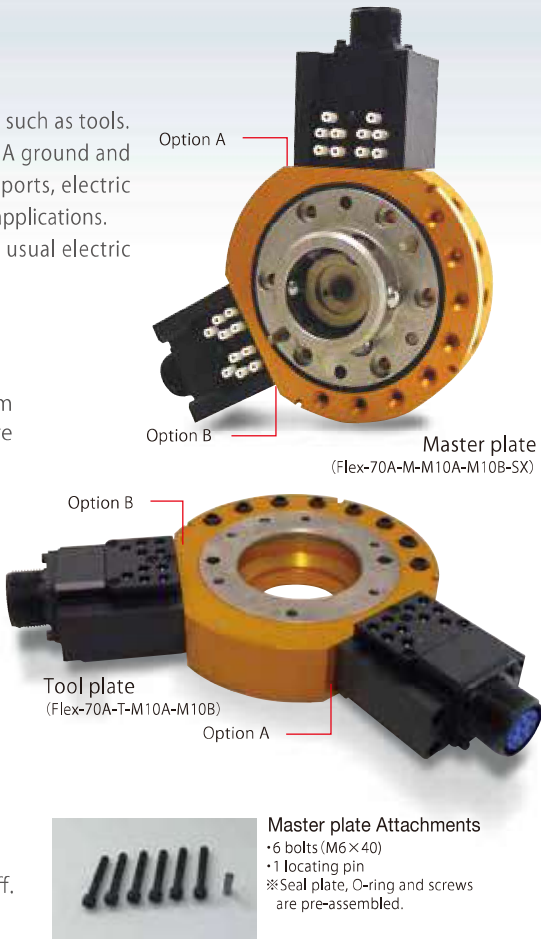

Specifications

Main Body		
Load capacity (rated load)		686N (70kg)
Positional repeatability		±0.015mm
Allowable dynamic moment	Bending direction (Tx, Ty)	686N·m (70kgf·m)
	Twisting direction (Tz)	784N·m (80kgf·m)
Coupling force (with air pressure of 0.49 MPa) ※1		7,056N(720kgf)
Materials	Frame	Aluminum alloy
	Lock/unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ139×H65mm
Weight (Main body)	Master plate	1,900g
	Tool plate	1,200g
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa (4~7kgf/cm ²)
Allowable temperature and humidity ranges		0~50°C, 35~90% (Non-condensing)
Utilities	Pneumatic ports	Rc1/8×8

※1 Coupling force is the force to achieve specified repeatability. Coupling force will be maintained until unlock pressure is applied or the device is damaged.
※2 The connector plug is user-provided.
※3 Cables of Lock/unlock sensors (proximity sensor) can be connected optional connectors (J16A, M10A, A16A, A08A). Please contact BL Autotec, Ltd. for further information.


Options			
Utilities	D15A, D15B	Electrical signals	3A×15 ※2
	J16A, J16B	Electrical signals	5A×16 ※3 ※4
	M10A, M10B	Electrical signals	13A×10 ※3 ※5
	A16A, A16B	Electrical signals	Approach Sensor + 5A×16 ※3 ※4
	A08A, A08B	Electrical signals	Approach Sensor + 13A×8 ※3 ※5
	B15NA, B15NB, B15PA, B15PB	Electric signals Max.50mA DC24V Non-contact system (Please refer to page 41 for details.)	50mA×15 WEB series connector ※3 In Zone 1 IP67
	B15DA, B15DB	Electric signals Max.5mA DC12V Non-contact system (Please refer to page 41 for details.)	5mA×15 WEB series connector ※3 IP67
	E50A, E50B	Ground	500A (50% usage) ×1
	P18A, P18B	Pneumatic ports	Rc1/8×4
	P14A, P14B	Pneumatic ports	Rc1/4×2
	P3WA, P3WB	Pneumatic ports	Rc3/8×2
	Lock/unlock sensor	※6	Two built-in proximity switches

Flex-70A Ordering Information

Master plate		(Option A)	(Option B)	(Lock/unlock sensor)
Flex-70A -M-		□□□□	□□□□	□□
Tool plate		(Option A)	(Option B)	
Flex-70A -T-		□□□□	□□□□	
XXXX		No option	XXXXB	No option
D15A		Electrical signals 3A×15※2	D15B	Electrical signals 3A×15※2
J16A		Electrical signals 5A×16※3 ※4	J16B	Electrical signals 5A×16※3 ※4
M10A		Electrical signals 13A×10※3 ※5	M10B	Electrical signals 13A×10※3 ※5
A16A		Approach sensors + Electrical signals 5A×16※3 ※4	A16B	Approach sensors + Electrical signals 5A×16※3 ※4
A08A		Approach sensors + Electrical signals 13A×8※3 ※5	A08B	Approach sensors + Electrical signals 13A×8※3 ※5
B15NA		Non-contact electric signal block Master side NPN output	B15NB	Non-contact electric signal block Master side PNP output
B15PA		Non-contact electric signal block Master side PNP output	B15PB	Non-contact electric signal block Master side PNP output
B15DA		Non-contact electric signal block Tool side	B15DB	Non-contact electric signal block Tool side
E50A		Ground 500A×1	E50B	Ground 500A×1
P18A		Pneumatic ports Rc1/8×4	P18B	Pneumatic ports Rc1/8×4
P14A		Pneumatic ports Rc1/4×2	P14B	Pneumatic ports Rc1/4×2
P3WA		Pneumatic ports Rc1/8×2	P3WB	Pneumatic ports Rc1/8×2

Note: ◎Combination of E50A & E50B, PC3WA & PC3WB, PC3WA & E50B cannot be used on the same Flex-70A.

Main Body Dimensions

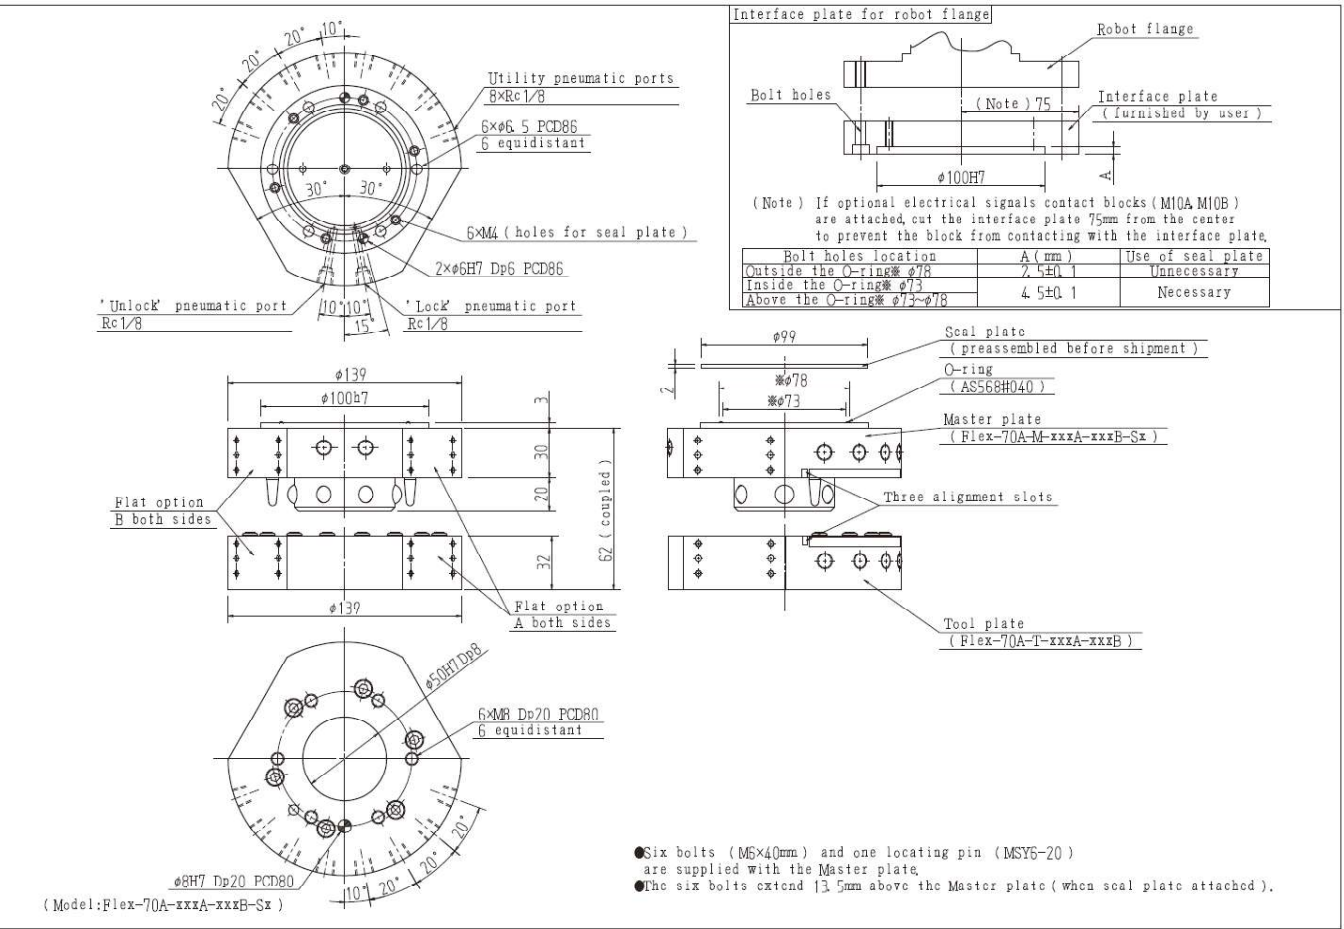

Options

Electrical signal contact block

D15A,D15B 3A×15 D-sub 15 contacts (female receptacles) ※2 ※ Plug side is D0K, 17J6-23150-02(D8A)-CG, or its equivalent.	J16A,J16B 5A×16 (JM connector) ※3 ※4 Use JMR2116M-D for the J16A master side Use JMR2116F-D for the J16A tool side Use JMR2116MX-D for the J16B master side Use JMR2116FX-D for the J16B tool side	M10A,M10B 13A×10 (MS connector) ※3 ※5 Use D/MS3102A 18-1P for the M10A master side Use D/MS3102A 18-1S for the M10A tool side Use D/MS3102A 18-19P for the M10B master side Use D/MS3102A 18-19S for the M10B tool side	A16A,A16B Approach Sensor 5A×16 (JM connector) ※3 ※4 Use JMR2119M-D for the A16A master side Use JMR2119F-D for the A16A tool side Use JMR2119MX-D for the A16B master side Use JMR2119FX-D for the A16B tool side	A08A,A08B Approach Sensor 13A×8 (MS connector) ※3 ※5 Use D/MS3102A 18-1P for the A08A master side Use D/MS3102A 18-1S for the A08A tool side Use D/MS3102A 18-19P for the A08B master side Use D/MS3102A 18-19S for the A08B tool side
--	--	---	--	--

Non-contact electric signal block



B15NA/B, B15PA/B (Master side only)
B15DA/B (Tool side only)

B15NA/B NPN output
B15PA/B PNP output

Receptacle connector: WEBB-2119S-D for B15NA/B and B15PA/B
Receptacle connector: WEBB-2119S-D for B15DA/B

Ground



E50A,E50B
Ground 500A×1

Pneumatic ports



P18A,P18B
Rc1/8×4



P14A,P14B
Rc1/4×2



P3WA,P3WB
Rc3/8×2

Lock/unlock sensor



SA,SB
Two built-in proximity switches verify piston position, thus reliably checking the lock and unlock status.

Please contact BL Autotec, Ltd. for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. ※2 Plug connector is not included. Please prepare plug connector type 17J6-23150-02(D8A)-CG or compatible type. ※3 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. ※4 Allowable current is total 30.4A for connector. ※5 Allowable current is total 57.2A for connector. ※6 An option is available on the electric signal contact block (J16A, M10A, A16A, A08A) to connect the Lock/unlock proximity switch signal. Please contact us for additional information.

SA Type...The sensor plate can be used in place of an interface plate with modifications by the user
SB Type...The sensor plate can be used in place of an interface plate with modifications by BL Autotec, Ltd.
※When you order the lock/unlock sensor plate please provide us with a drawing of the robot flange.

QCP-100A

The BL QUICK-CHANGE Model QCP-100 is an automatic tool changer used in press handling applications for switching part-adsorption end-effectors. It is easy to set up ID confirmation on the Tool plate side, and the block itself is equipped with a protective cover. An electrical signal contact block without a connector on the tool side is available as an option.

Body designed specially for press applications

Both sides of the Tool plate are cut, which allows it to be placed in an upright position, requiring less space for hand installation.

Utilities specially considered for press applications


Eight pneumatic vacuum ports are included on standard equipment, and the QCP-100 can be optionally equipped with up to 16 ports. The Tool plate has an optional electrical signal block contact without a connector (R16A/B). Directly-soldered hard-wiring makes a plug unnecessary, so it cannot be damaged when hands are exchanged. It is easy to assign ID discrimination in the hard-wiring section, and the block itself is protected by a metal cover.

Capability to assign power signals to the lock/unlock sensor from the electrical signal contact block

Two types of power signals may be assigned to the lock/unlock sensor (optional) from the electrical signal contact block.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master plate and Tool plate to uncouple if the air pressure is shut off.

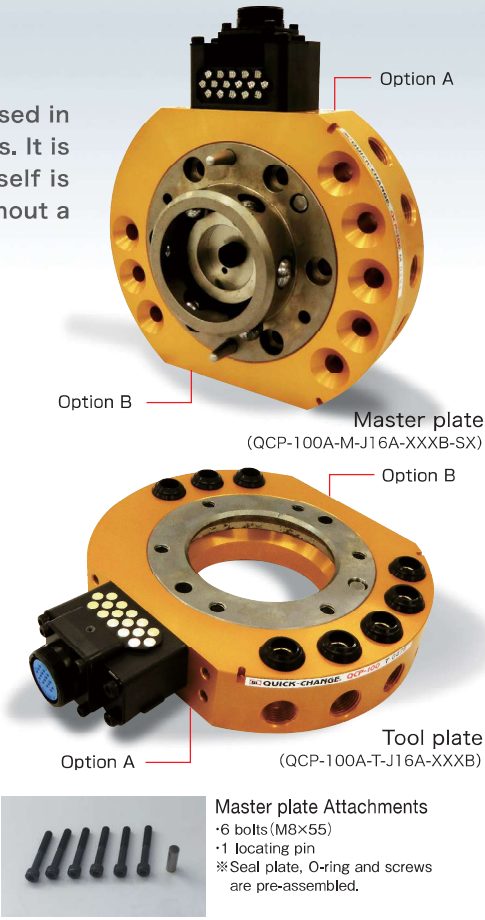

Specifications


Main Body	
Load capacity (rated load)	980N(100kg)
Positional repeatability	±0.015mm
Allowable dynamic moment	Bending direction (Tx, Ty) 1,372N・m (140kgf・m) Twisting direction (Tz) 1,372N・m (140kgf・m)
Coupling force (with air pressure of 0.49Mpa) ※1	10,290N (1,050kgf)
Materials	Frame Aluminum alloy Lock/ unlock mechanism Stainless steel
Overall dimension (when coupled)	φ179×H79.5mm
Weight (Main body)	Master plate 3.5kg Tool plate 2.0kg
Self-separating mechanism	Ball-locking mechanism
Required air pressure	0.39~0.68MPa (4~7kgf/cm²)
Allowable temperature and humidity ranges	0~50°C, 35~90% (Non-condensing)
Utilities	Pneumatic ports Rc3/8×8

Options			
Utilities	J16A, J16B	Electrical signals	5A×16 ※2 ※6
	M10A, M10B	Electrical signals	13A×10 ※2 ※7
	L16A	Electrical signals	5A×16 + lock/unlock signals ×3 (Master side only) ※2 ※3 ※6
	L07A	Electrical signals	13A×7 + lock/unlock signals ×3 (Master side only) ※2 ※4 ※7
	R16A, R16B	Electrical signals	5A×16 (Tool side only, An electrical signal contact block without a connector specification) ※5 ※6
	B15NA, B15NB, B15PA, B15PB	Electric signals Max.50mA DC24V Non-contact system (Please refer to page 41 for details.)	50mA×15 WEB series connector ※2 In Zone 1 IP67
	B15DA, B15DB	Electric signals Max.5mA DC12V Non-contact system (Please refer to page 41 for details.)	5mA×15 WEB series connector ※2 IP67
	P38A, P38B	Pneumatic ports	Rc3/8×4
	Lock/unlock sensor		
	Two built-in proximity switches		

QCP-100A Ordering Information


Master plate	QCP-100A-M-	(Option A)	(Option B)	(lock unlock sensor)
		XXXX	XXXX	SX
		J16A	J16B	SA
		M10A	M10B	SB
		L16A	B15NB	
		L07A	B15PB	
		B15NA	P38B	
		B15PA		
		P38A		
Tool plate	QCP-100A-T-	(Option A)	(Option B)	
		XXXX	XXXX	
		J16A	J16B	
		R16A	R16B	
		M10A	M10B	
		B15DA	B15DB	
		P38A	P38B	

Main Body Dimensions

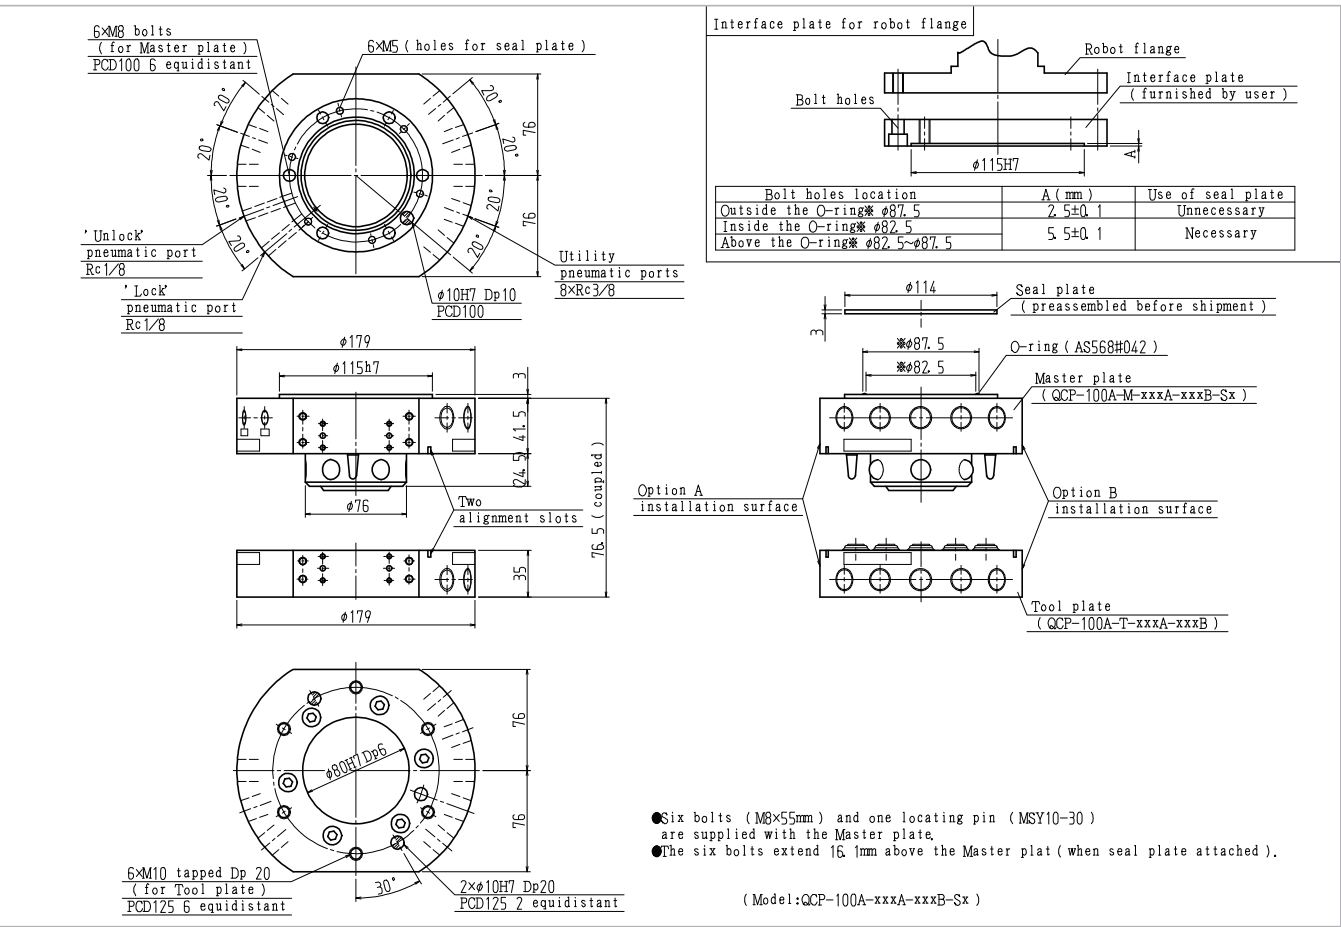


Options

Electrical signal contact block

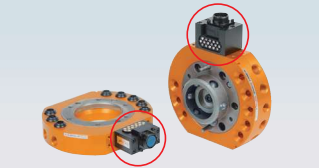


J16A, J16B
5A×16 (J16A-B) ※2 ※6

Use JMR2116M-D (DDK) for the J16A Master side
 Use JMR2116F-D (DDK) for the J16A Tool side
 Use JMR2116MX-D (DDK) for the J16B Master side
 Use JMR2116FX-D (DDK) for the J16B Tool side
 Use JMR2119M-D (DDK) for the J16A Master side

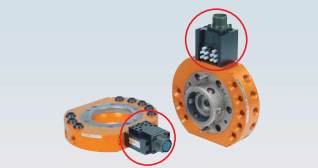

M10A, M10B, L07A (Master side only)
13A×10 (M10A-B) ※2 ※7
13A×7+lock/unlock signals (L07A) ※2 ※4 ※7


Use D/MS3102A16-1P for the M10A and L07A Master side
 Use D/MS3102A16-1S for the M10B Tool side
 Use D/MS3102A16-19P for the M10B Master side
 Use D/MS3102A16-19S for the M10B Tool side
 (Use RoHS-compliant MS receptacle products)

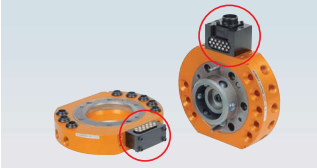

R16A, R16B (Tool side only)
5A×16 (without a connector) ※5 ※6

Please solder the hard-wiring (Please use J16A, J16B or L16A for the Master side)

Non-contact electric signal block

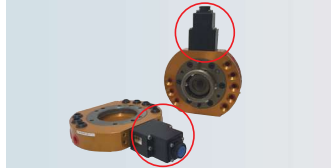

B15NA/B, B15PA/B (Master side only)
B15DA/B (Tool side only)
B15NA/B NPN output
B15PA/B PNP output

Receptacle connector: WEBR-2119S-D for B15NA/B and B15PA/B
 Receptacle connector: WEBR-2116F-S-D for B15DA/B

Pneumatic ports



P38A, P38B
Rc3/8×4

Lock/unlock sensor



SA, SB
Two built-in proximity switches verify piston position on and lock/ unlock status.

Please contact us for detailed information on the options.

SA Type...The sensor plate can be used in place of an interface plate with modifications by the user.
 SB Type...The sensor plate can be used in place of an interface plate with modifications by BL Autotec ,Ltd.
 ※When you order the lock/unlock sensor please provide us with a drawing of the robot flange.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. ※2 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. Please use 5A × 16 electrical signal contacts (J16A or R16A) on the tool side. ※4 Please use 13A × 10 electrical signal contacts (MS connector (Three of the 10 contacts are not useable)) ※5 Please use 5A × 16 electrical signal contacts (J16A or R16A) on the master side. ※6 Allowable current is total 30.4A for connector. ※7 Allowable current is total 57.2A for connector. ※8 Please select J16A or R16A for the tool side. ※9 Lock/unlock Sensor SA or SA may be selected for L16A. The receptacle connector is type JMR2119F (19 pins). Please select contact block J16A or R16A for the tool side. ※10 Lock/unlock Sensor SA or SA may be selected for L07A. The receptacle connector is D/MS3102A-1P (10 pins). Please select contact block M10A for the tool side. ※11 Please select electric signal contact block J16B or R16B for the tool side. ※12 Up to seven electric signals may be used when L07A is selected for the master side.

QC-150C

The Master plate can lock onto the Tool plate with a gap between them.

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.



Master plate Attachments

- 6 bolts (M10×60)
- 1 locating pin
- ※ Seal plate, O-ring and screws are pre-assembled.



Specifications

Main Body		
Load capacity (rated load)		1,470N(150kg)
Positional repeatability		±0.015mm
Allowable dynamic moment	Bending direction (Tx, Ty)	1,960N·m(200kgf·m)
	Twisting direction (Tz)	1,960N·m(200kgf·m)
Coupling force (with air pressure of 0.49MPa) ※1		14,317N(1,460kgf)
Materials	Frame	Anodized aluminum
	Lock/unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ200×H90mm
Weight (Main body)	Master plate	5,810g
	Tool plate	2,860g
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa(4~7kgf/cm ²)
Allowable temperature and humidity ranges		
Utilities	Electical signals Max3 AC50V Probe contact	3A×37 or none ※2
	Pneumatic ports	Rc3/8×10

Options			
Utilities	D37Z	Electical signals	3A×37 ※2
	J16Z	Electical signals	5A×16 ※3 ※4
	M10Z	Electical signals	13A×10 ※3 ※5
	M19Z	Electical signals	13A×19 ※3 ※6
	A16Z	Electical signals	Approach sensor+5A×16 ※3 ※4
	A08Z	Electical signals	Approach sensor+13A×8 ※3 ※5
	B15NZ	Electric signals Max.50mA DC24V	50mA×15 WEB series connector ※3
	B15PZ	Non-contact system (Please refer to page 41 for details.)	In Zone 1 IP67
	B15DZ	Electric signals Max.5mA DC12V Non-contact system (Please refer to page 41 for details.)	5mA×15 WEB series connector ※3 IP67
	E50Z	Ground	500A (50% usage) ×1
	P18Z	Pneumatic ports	Rc1/8×4
	P14Z	Pneumatic ports	Rc1/4×2
P38Z	Pneumatic ports	Rc3/8×4	
P3WZ	Pneumatic ports	Rc3/8×2	
Lock/unlock sensor ※7			Two built-in proximity switches

QC-150C Ordering Information

Master plate **QC-150C -M-** (Option N) (Option Z) (lock unlock sensor)


Tool plate **QC-150C -T-** (Option N) (Option Z)

DXXN	No electrical signal
D37N	Electrical signals 3A x 37 #2
XXXZ	No option
D37Z	Electrical signals 3A x 37 #2
J16Z	Electrical signals 3A x 16 #3 #4
M10Z	Electrical signals 13A x 10 #3 #5
M19Z	Electrical signals 13A x 19 #3 #6
A16Z	Approach sensors + Electrical signals 5A x 16 #3 #4
A08Z	Approach sensors + Electrical signals 13A x 8 #3 #5
B15NZ	Non-contact electric signal block Master side NPN output
B15PZ	Non-contact electric signal block Master side PNP output
B15DZ	Non-contact electric signal block Tool side
E50Z	Ground 500A x 1
P18Z	Pneumatic ports Rc1/8 x 4
P14Z	Pneumatic ports Rc1/4 x 3
P38Z	Pneumatic ports Rc3/8 x 4
P3WZ	Pneumatic ports Rc3/8 x 2
SX	No lock/unlock sensor
SA	Lock/unlock sensor A-Type (Customer processes the adaptor plate)
SB	Lock/unlock sensor B-Type (BL Autotec processes the adaptor plate)


(Note) Please provide specifics on the electric signal contact block as follows.
(Model D37N-M for master plate, Model D37N-T for Tool plate).

(Note) Please provide specifics on the electric signal contact block as follows.
(Model D37N-M for master plate, Model D37N-T for Tool plate).

Main Body Dimensions

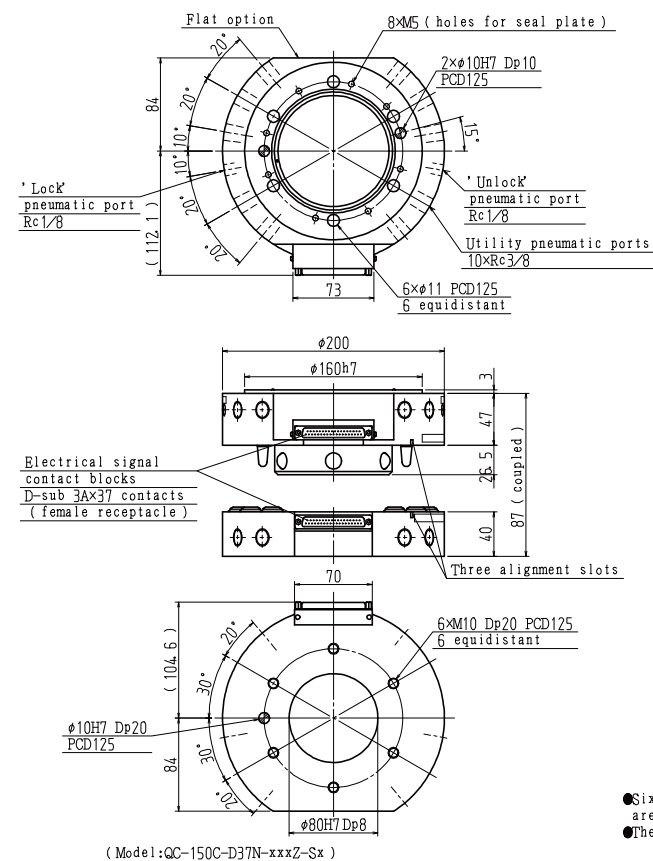

- Six bolts (M10×60mm) and one locating pin (MSY10-30) are supplied with the Master plate.
- The six bolts extend 17.8mm above the Master plate (when seal plate attached).

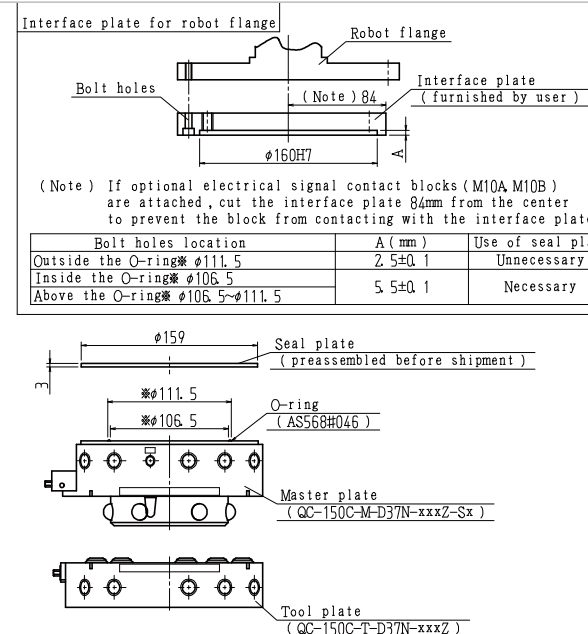

Options

■Electrical signal contact block



D37Z	J16Z	M10Z	M19Z	A16Z	A08Z
3Ax37 D-sub 37 contacts (female receptacles)※2	5Ax16 (JM connector)※3 ※4	13Ax10 (MS connector)※3 ※5	13Ax19 (MS connector)※3 ※6	Approach Sensor 5Ax16 (JM connector)※3 ※4	Approach Sensor 13Ax8 (MS connector)※3 ※4
※Plug size is DDK, 17 JE-2337/4-02 (D8A) -DG, or its equivalent.	Use JMRJ2116MD for the J16Z Master side Use JMRJ2119F-D for the J16Z Tool side	Use D/MSJ3102A16-P for the M10Z Master side Use D/MSJ3102A16-S for the M10Z Tool side	Use D/MSJ3102A24-F for the M19Y Master side Use D/MSJ3102A24-S for the M19Y Tool side	Use JMRJ2119MD for the A16Z Master side Use JMRJ2119F-D for the A16Z Tool side	Use D/MSJ3102A18-P for the A08Z Master side Use D/MSJ3102A18-S for the A08Z Tool side

electric signal block



B15NZ, B15PZ
B15DZ (Tool side only)

B15NZ	NPN output
B15PZ	PNP output

Receptacle connector: WEBR-2116FS-D for B150Z

electric signal block ■ Ground



E50Z
Ground 500A×1

■ Pneumatic ports



P18Z
Rc1/8x4



P14Z
Rc1/4x2



P38Z
Rc3/8×4



P3WZ
Rc3/8x2

- Lock/unlock sensor



SA,SB

Two built-in proximity switches verify piston position, thus reliably checking the lock and unlock status.

Please contact BL Autotec, Ltd.
for detailed information on the options.

*#1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. *#2 Plug connector is not included. Please prepare plug connector type 17J-E2315-02(D8A)-CG or compatible type. *#3 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. *#4 Allowable current is total 30.4A for connector. *#5 Allowable current is total 57.2A for connector. *#6 Allowable current is total 88.9A for connector. *#3 Allowable current is total 30.4A for connector. *#4 Allowable current is total 57.2A for connector.

QCP-220

The BL QUICK-CHANGE Model QCP-220 is an automatic end-effector changer used in press handling and loading applications, with a payload capacity of 200kg for large panels and high-speed robots. It can be directly installed on a PCD125 mm robot flange.

Utilities specifically for press applications

Pneumatic ports (Rc1/2) can be used for vacuum pressure and electrical signals can be used for ID confirmation.

Built-in lock/unlock sensor


Due to built-in design, QCP-220 is 12.4% thinner than QC-150C with the lock/unlock sensor.

Faster lock/unlock operation


By enlarging the lock/unlock port diameter, we increased the lock/unlock speed by 50% compared with previous models. (In-house comparison.)

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

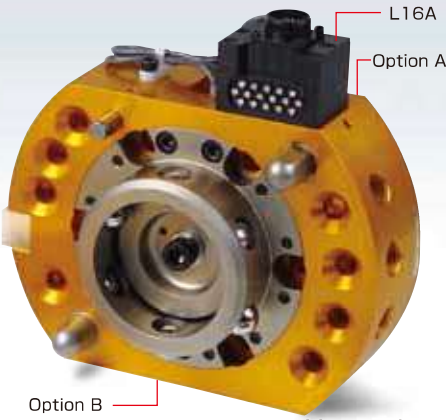

Master plate (QCP-220-M-L16A-XXXB-SA)

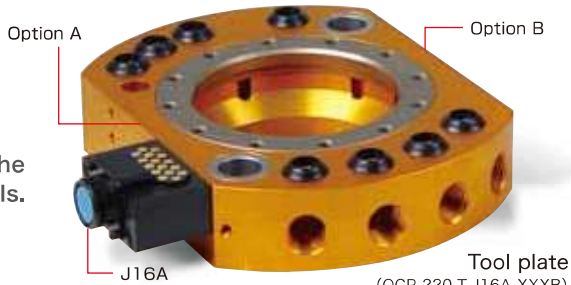

Tool plate (QCP-220-T-J16A-XXXB)



Master plate Attachments
• 6 bolts (M10x65)
• 6 plain washers
• 1 locating pin

Specifications

Main Body			
Load capacity (rated load)		2,156N (220kg)	
Positional repeatability		±0.025mm	
Allowable dynamic moment	Bending direction (Tx, Ty)	3,332N·m (340kgf·m)	
	Twisting direction (Tz)	3,332N·m (340kgf·m)	
Coupling force (at 0.49MPa air pressure) ※1		27,444N (2,800kgf)	
Materials	Frame	Aluminum alloy	
	Lock/ unlock mechanism	Stainless steel	
Overall dimension (when coupled)		φ229×H110mm	
Weight (Main body)	Master plate	8.4kg	
	Tool plate	3.6kg	
Lock/ unlock mechanism		Ball-locking mechanism	
Required operating air pressure		0.39~0.68MPa (4~7kgf/cm²)	
Lock/ unlock sensor	Lock status	1 built-in proximity switch E2E-X2D1-N (OMRON) (2-wire direct current)	
	Unlock status	1 built-in proximity switch E2E-X2D1-N (OMRON) (2-wire direct current)	
Allowable temperature and humidity ranges		0~50°C, 35~90% (Non-condensing)	
Utilities	Electrical signals	5A×16 (There are 19 lock/unlock receptacles on the Master plate side) ※2	
	Pneumatic ports	Rc1/2×8 (can use vacuum pressure)	

Options			
Utilities	J16A	Electrical signals	5A×16 ※2 ※3
	J16B	Electrical signals	5A×16 ※2 ※3 ※5
	M10B	Electrical signals	13A×10 ※2 ※4
	B15NB	Electric signals	50mA×15
	B15PB	Max.50mA DC24V	WEB series connector ※2
		Non-contact system	In Zone 1
		(Please refer to page 41 for details.)	IP67
	B15DB	Electric signals	5mA×15
		Max.5mA DC12V	WEB series connector ※2
		Non-contact system	IP67
	P3WB	Pneumatic ports	Rc3/8×4
	P38B	Pneumatic ports	Rc3/8×2

Master plate

QCP-220 -M-

(Option A)

XXXX

No electrical signal

(Option B)

XXXX

No option

(lock unlock sensor)

SX

No lock/unlock sensor

(lock unlock sensor)

SA

Built-in lock/unlock sensor

J16B

Electrical signals 5A×16※2 ※3

L16A

Electrical signals Master side 5A×16※2 ※3

M10B

Electrical signals 13A×10※2 ※4

B15NB

Non-contact electric signal block Master side NPN output

B15PB

Non-contact electric signal block Master side PNP output

P38B

Pneumatic ports Rc3/8×4

P3WB

Pneumatic ports Rc3/8×2

Note)

"Option" is installed at B side only.

Tool plate

QCP-220 -T-

(Option A)

XXXX

No electrical signal

(Option B)

XXXX

No option

(lock unlock sensor)

SX

No lock/unlock sensor

(lock unlock sensor)

SA

Built-in lock/unlock sensor


J16A

Electrical signals 5A×16※2 ※3

B15DB

Non-contact electric signal block Tool side

Main Body Dimensions

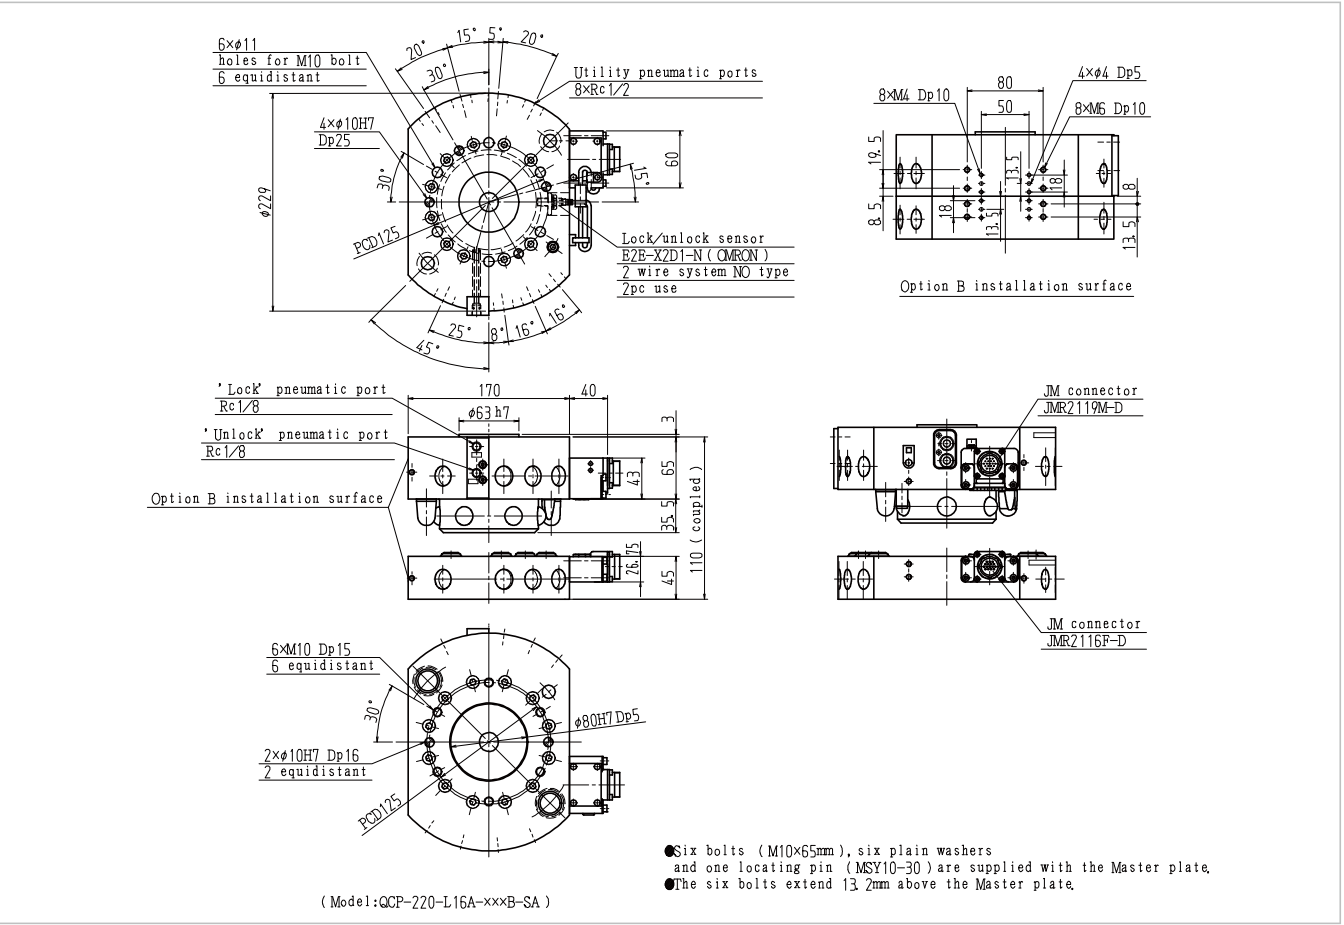

Options

Electrical signal contact block

L16A(Master side only)

J16A(Tool side only)

5A×16 (JM connector)※2 ※3

5A×16 (JM connector)※2 ※3

Use JMR2119M-D for the L16A on the Master side

Use JMR2116M-D for the J16A on the Master side

Use JMR2116F-D for the J16A on the Tool side

Non-contact electric signal block

J16B

5A×16 (JM connector)※2 ※3

Use JMR2116M-D for the J16B on the Master side

Use JMR2116F-D for the J16B on the Tool side

M10B

13A×10 (MS connector)※2 ※4

Use D/ MS3102A18-9P on the Master side of M10B

Use D/ MS3102A18-19S on the Tool side of M10B

(Use RoHS-compliant MS receptacle products.)

B15NB,B15PB(Master side only)

B15DB(Tool side only)

B15NB NPN output

B15PB PNP output

Receptacle connector: WEBR-2119S-D for B15NB and B15PB

Receptacle connector: WEBR-2116FS-D for B15DB

Pneumatic pressure ports

P3WB

Rc3/8×2

P38B

Rc3/8×4

Please contact us for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. ※2 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. ※3 Allowable current is total 30.4A for connector. ※4 Allowable current is total 57.2A for connector. ※5 Standard lock/unlock sensor is NPN. Please ask us if you request PNP system.

32

33

Flex-300A

The BL QUICK-CHANGE Model Flex-300A is a device for automatic tool changing, specially designed for high payload capacity robots generally used in handling and palletizing. Optional electrical contacts or pneumatic ports can be selected for the Flex-300A.

Heavy duty applications

For heavy duty applications, a special seal prevents dust from entering the locking mechanism and electrical contacts when the two plates are coupled. (Load Capacity: 300kg/Allowable static moment (Tx, Ty) :270kgf·m)

Self-sealing pneumatic ports


There are ten pneumatic ports in the Master plate (Rc3/8). Eight of the ten ports are self-sealing, which automatically shut off air pressure when uncoupled and allow for easier air control in the system.

Large misalignment correction capability

The unique design corrects misalignment when the Master and Tool plates couple. An approach sensor system, built into the plates, verifies coupling capability.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.

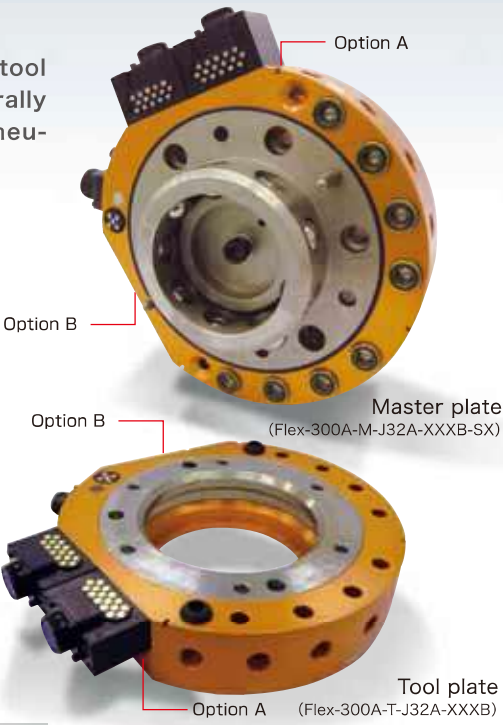

Specifications


Main Body		
Load capacity (rated load)		2,940N (300kg)
Positional repeatability		±0.025mm
Allowable dynamic moment	Bending direction (Tx, Ty)	5,292N·m (540kgf·m)
	Twisting direction (Tz)	4,704N·m (480kgf·m)
Coupling force (with air pressure of 0.49MPa) ※1		31,360N (3,200kgf)
Materials	Frame	Aluminum alloy
	Lock/ unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ259×H116mm
Weight (Main body)	Master plate	13.2kg
	Tool plate	7.2kg
Self-separating mechanism		Ball-locking mechanism
Required air pressure		0.39~0.68MPa (4~7kgf/cm²)
Allowable temperature and humidity ranges		0~50°C, 35~90% (Non-condensing)
Utilities	Electrical signals	5A×5 ※2
		Max. 5 DC/AC200V
	Pneumatic ports	Rc3/8×8 (self-sealing) ※3
		Rc3/8×2
	Approach sensor	Senses Tool plate position up to 2.5mm distance

Options			
Utilities	J16A, J16B	Electrical signals	5A×16 ※2 ※4
	J32A, J32B	Electrical signals	5A×32 ※2 ※4
	M10A, M10B	Electrical signals	13A×10 ※2 ※5
	M20A, M20B	Electrical signals	13A×20 ※2 ※5
	B15NA, B15NB, B15PA, B15PB	Electric signals Max.50mA DC24V Non-contact system (Please refer to page 41 for details.)	50mA×15 WEB series connector ※2 インゾーン 1 IP67
	B15DA, B15DB	Electric signals Max.5mA DC12V Non-contact system (Please refer to page 41 for details.)	5mA×15 WEB series connector ※2 IP67
	E50A, E50B	Ground	500A (50% usage) ×1
	P18A, P18B	Pneumatic ports	Rc1/8×4
	P14A, P14B	Pneumatic ports	Rc1/4×2
	P38A, P38B	Pneumatic ports	Rc3/8×4
	P3WA, P3WB	Pneumatic ports	Rc3/8×2
	Lock/unlock sensor ※6		Two built-in proximity switch

Flex-300A Ordering Information

Master plate	Flex-300A-M-	(Option A)	(Option B)	(lock unlock sensor)			
Tool plate	Flex-300A-T-	(Option A)	(Option B)				
		XXXX	No option	XXXXB	No option	SX	No lock/unlock sensor
		J16A	Electrical signals 5A×16#2 #4	J16B	Electrical signals 5A×16#2 #4	SA	Lock/unlock sensor A-Type (Customer processes the adaptor plate)
		J32A	Electrical signals 5A×32#2 #4	J32B	Electrical signals 5A×32#2 #4	SB	Lock/unlock sensor B-Type (BL Autotec processes the adaptor plate)
		M10A	Electrical signals 13A×10#2 #5	M10B	Electrical signals 13A×10#2 #5		
		M20A	Electrical signals 13A×20#2 #5	M20B	Electrical signals 13A×20#2 #5		
		B15NA	Non-contact electric signal block Master side NPN output	B15NB	Non-contact electric signal block Master side NPN output		
		B15PA	Non-contact electric signal block Master side PNP output	B15PB	Non-contact electric signal block Master side PNP output		
		B15DA	Non-contact electric signal block Tool side	B15DB	Non-contact electric signal block Tool side		
		E50A	Ground 500A×1	E50B	Ground 500A×1		
		P18A	Pneumatic ports Rc1/8×4	P18B	Pneumatic ports Rc1/8×4		
		P14A	Pneumatic ports Rc1/4×2	P14B	Pneumatic ports Rc1/4×2		
		P38A	Pneumatic ports Rc3/8×4	P38B	Pneumatic ports Rc3/8×4		
		P3WA	Pneumatic ports Rc3/8×2	P3WB	Pneumatic ports Rc3/8×2		

Main Body Dimensions

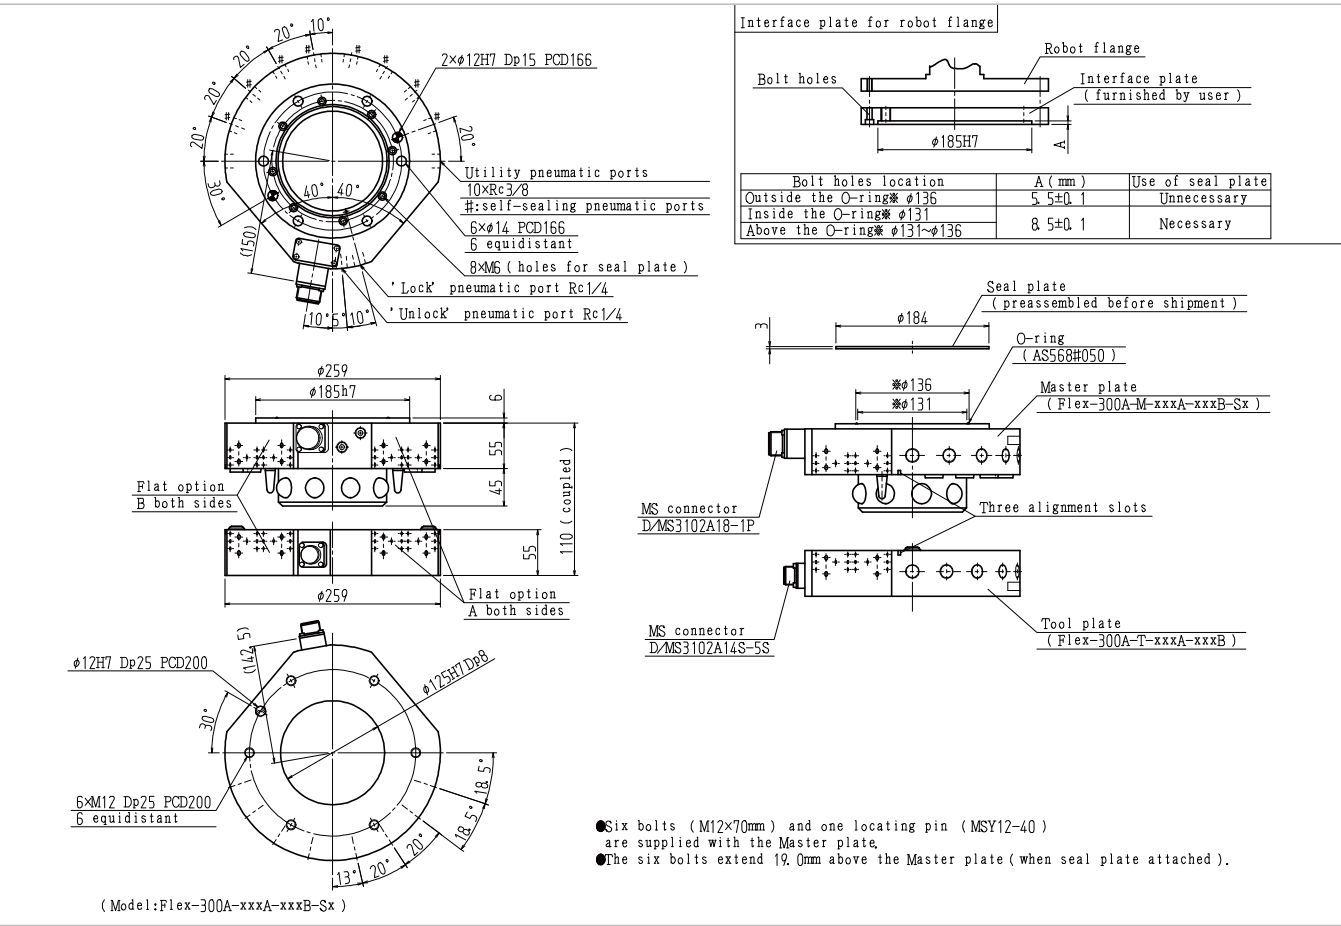

Options

Electrical signal contact block



J16A, J16B

5A×16 (JM connector) ※2 ※4

Use JMR2116M-D for the J16A Master side
Use JMR2116F-D for the J16A Tool side
Use JMR2116MX-D for the J16B Master side
Use JMR2116FX-D for the J16B Tool side



J32A, J32B

5A×32 (JM connector) ※2 ※4


Use two JMR2116M-D for the J32A Master side
Use two JMR2116F-D for the J32A Tool side
Use two JMR2116MX-D for the J32B Master side
Use two JMR2116FX-D for the J32B Tool side



M10A, M10B

13A×10 (MS connector) ※2 ※5

Use D/MS3102A18-1P for the M10A Master side
Use D/MS3102A18-1S for the M10A Tool side
Use D/MS3102A18-19P for the M10B Master side
Use D/MS3102A18-19S for the M10B Tool side



M20A, M20B

13A×20 (MS connector) ※2 ※5

Use two D/MS3102A18-1P for the M20A Master side
Use two D/MS3102A18-1S for the M20A Tool side
Use two D/MS3102A18-19P for the M20B Master side
Use two D/MS3102A18-19S for the M20B Tool side



B15NA/B, B15PA/B (Master side only)

B15DA/B (Tool side only)

B15NA/B NPN output
B15PA/B PNP output
Receptacle connector: WEBR-2119S-D for B15NA/B and B15PA/B
Receptacle connector: WEBR-2116FS-D for B15DA/B

Ground



E50A, E50B

Ground 500A×1

Pneumatic ports



P18A, P18B

Rc1/8×4



P14A, P14B

Rc1/4×2



P38A, P38B

Rc3/8×4



P3WA, P3WB

Rc3/8×2

Lock/unlock sensor



SA, SB

Two built-in proximity switches verify piston position, thus reliably checking the lock and unlock status.

Please contact BL Autotec, Ltd. for detailed information on the options.

SA Type...The sensor plate can be used in place of an interface plate with modifications by the user
SB Type...The sensor plate can be used in place of an interface plate with modifications by BL Autotec, Ltd.
※ When you order the lock/unlock sensor please provide us with a drawing of the robot flange.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. ※3 Plug connector is not included. Please prepare plug connector by customer. For connector, please see correspondence table on page 46. ※4 Allowable current is total 30.4A for connector. ※5 The two built-in proximity switch signals of the lock/unlock sensor can be assigned to the MS connector (D/MS3102A18-1P) of the main body. Please contact BL Autotec, Ltd. for further information.

Slimline Press Handling Specification

USP-100A

The BL QUICK-CHANGE Model USP-100A is a thin-shaped automatic end-effector changer designed to handle the high-speed conveyance of press parts. The thin design allows end-effectors on the parallel displacement arm to work on molding applications in press processes. Even if the opening is narrow, press parts can be conveyed without changing direction. (Japan Patent No. 3717923)

Slimline design

BL's unique lock/unlock mechanism was newly designed to this specification, with a thickness of only 50mm when coupled, so it can handle narrow press openings.

Built-in position confirmation sensor


The built-in position confirmation sensor is equipped with a proximity switch.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master plate and Tool plate to uncouple if the air pressure is shut off.



Master plate
(USP-100A-M-D15U)

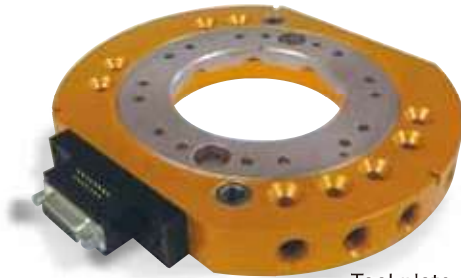

Tool plate
(USP-100A-T-D15U)



Master plate Attachments
·8 bolts (M8×30)
·2 locating pins (MSY8-20)
※ Seal plate, O-ring and screws
are pre-assembled.

Specifications


Main Body		
Load capacity (rated load)		980N(100kg)
Positional repeatability		±0.025mm
Allowable dynamic moment	Bending direction (Tx, Ty)	980N·m(100kgf·m)
	Twisting direction (Tz)	980N·m(100kgf·m)
Coupling force (with air pressure of 0.49MPa) ※1		12,740N(1,300kgf)
Materials	Frame	Aluminum alloy
	Lock/unlock mechanism	Stainless steel
Overall dimension (when coupled)		φ189×H50mm
Weight (Main body)	Master plate	3.0kg
	Tool plate	1.7kg
Self-separating mechanism		Ball-locking mechanism
Required operating air pressure		0.39~0.68MPa(4~7kgf/cm²)
Position-confirming sensor		1 built-in proximity switch E2E-X2DI-N (OMRON) 1m sensor cable (lead wire)
Allowable temperature and humidity ranges		0~50°C, 35~90%(Non-condensing)
Utilities	Pneumatic ports	Rc1/4×9 (can use vacuum pressure)

Options			
Utilities	D15U	Electrical signals	3A×15 (D-sub connector) ※2

USP-100A Ordering Information

Master plate	USP-100A -M-	(Option)	☐	☐	☐	☐
Tool plate	USP-100A -T-	(Option)	☐	☐	☐	☐
		XXXU	No options			
		D15U	Electrical signals 3A×15 ※2			

Main Body Dimensions

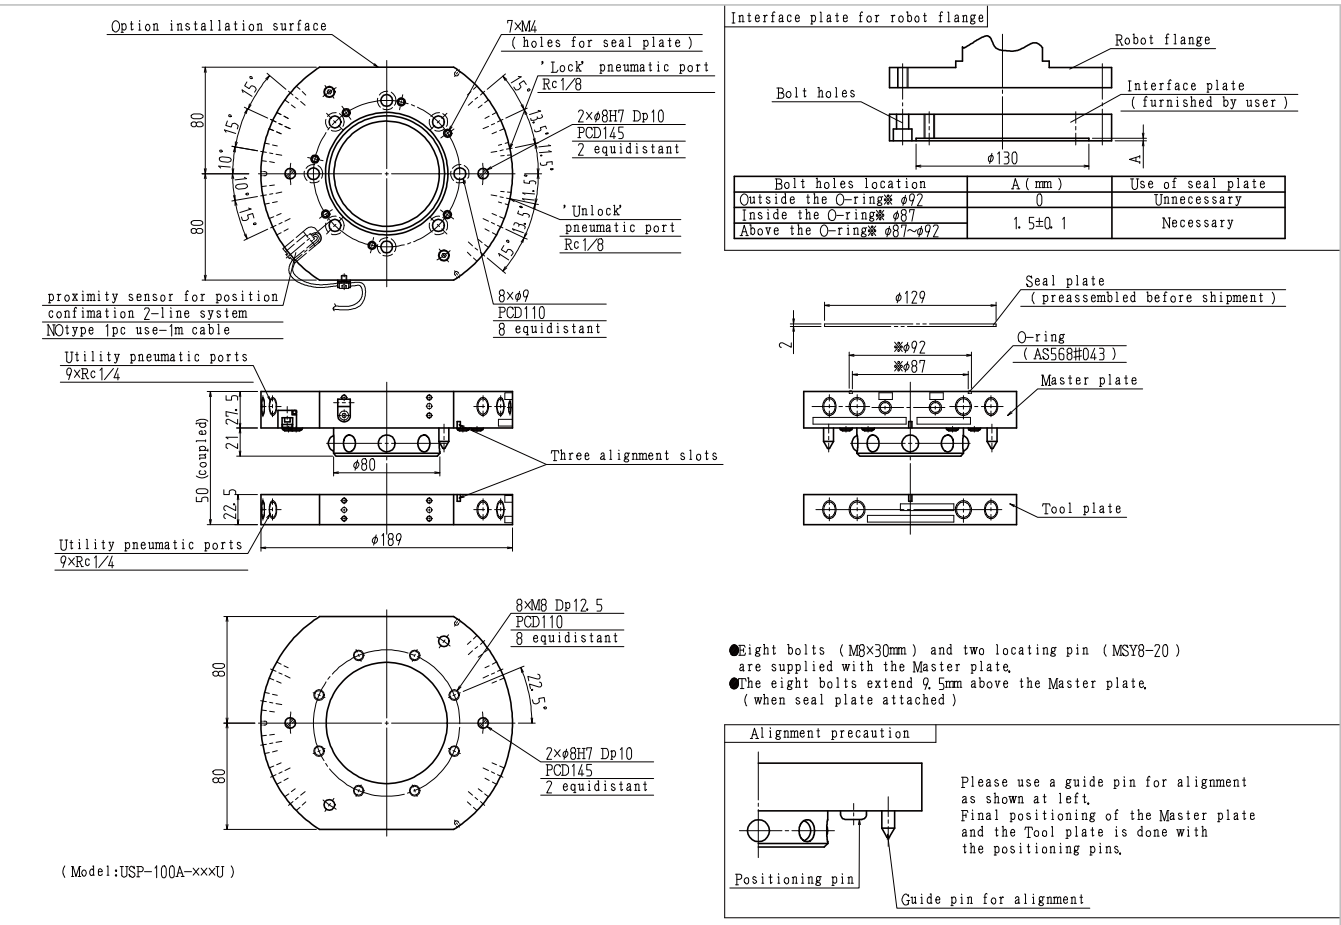

Options

■ Electrical signal contact block ※(Note) The electrical signal connector is user-provided.



D15U
3A×15 D-sub contacts
(female receptacle)※2
※Please use DDK, 17JE-23150-02(DBA)-CG or its equivalent,
on the plug side. (Use RoHS-compliant, D-sub plug products.)

Please contact BL Autotec, Ltd. for detailed information on the options.

※1 Coupling force is the force to achieve specified repeatability. Coupling force will be maintained until unlock pressure is applied or the device is damaged.
※2, Please provide a 17JE-23150-02(D8A)-CG plug or its equivalent. (D-sub plugs are RoHS.)

Next-Generation Robots	ZEUS	GIGA	Automatic Tool Changer	1kg	5kg	10kg	20kg	40kg	60kg	70kg	100kg	150kg	220kg	300kg	Press Handling Specification	100kg	Spot-Welding Gun-Changer	300kg	Options	Wire-Saving module / Contact Block	Non-contact electric signal block	A mechanical safety valve prevents Tool plate drops	Option List	Product Overview	Rotary Joint	PN-ZERO Series	Wrist Compliance	RCC DEVICE LINK-UP RCC DEVICE	Couple Joint	CJ2
------------------------	------	------	------------------------	-----	-----	------	------	------	------	------	-------	-------	-------	-------	------------------------------	-------	--------------------------	-------	---------	------------------------------------	-----------------------------------	---	-------------	------------------	--------------	----------------	------------------	-------------------------------	--------------	-----

Spot-welding Gun-Changer

GC-300A

The BL QUICK-CHANGE Model GC-300A is a device for automatic tool changing, specially designed for changing material handling welding guns or guns with built-in transformers in a spot-welding line. Primary current, air pressure and electrical signals (Servo) modules can be selected for the GC-300A.The GC-300A provides increased production line efficiency and cost effectiveness.

Unidirectional cable and hose

The power and control cables and the pneumatic hose are oriented in a single direction.

The primary current module contains a floating mechanism

The primary current module is equipped with a self-cleaning function and a floating mechanism.

Self-sealing coolant ports

The check valves of the circulating coolant ports are equipped with a PTFE sleeve to prevent liquid spillage.

Superior fail-safe locking mechanism

BL's unique lock/unlock mechanism contains a mechanical fail-safe feature which does not allow the Master and Tool plates to uncouple if the air pressure is shut off.



Master plate
(GC-300A-M-SC06M-FD24M-PC3DM-SA)



Tool plate
(GC-300A-T-SC06T-FD24T-PC3DT)



- Master plate Attachments
- 1 Insulation plate
 - 2 insulation pins
 - 6 insulation washers
 - 6 insulation pipes
 - 6 bolts (M10×30)
 - 1 locating pin
 - 6 plain washers

Specifications

Main Body	
Load capacity (rated load)	2,940N (300kg)
Positional repeatability	±0,025mm
Allowable dynamic moment	Bending direction (Tx, Ty) 5,292N·m (540kgf·m) Twisting direction (Tz) 4,704N·m (480kgf·m)
Coupling force (with air pressure of 0.49MPa) ※1	31,360N (3,200kgf)
Materials	Frame Aluminum alloy Lock/ unlock mechanism Stainless steel
Overall dimension (when coupled with all options)	W355×D265×H165mm
Weight ※2	Master plate 18.5kg (with all options) Tool plate 9.5kg
Lock/ unlock mechanism	Ball-locking mechanism
Required air pressure	0.39~0.68MPa (4~7kgf/cm²)
Allowable temperature and humidity ranges	0~50°C, 35~90% (Non-condensing)
Lock/ unlock sensor	for lock status 1 built-in proximity switch E2E-X2D4 (OMRON) for unlock status 1 built-in proximity switch E2E-X2D4 (OMRON)
Approach sensor	for Tool plate position Two built-in switch E2E-X2D4 (OMRON)

Modules				
Electrical signal module (Servo module)	Code	Capacity	Master plate side connector	Tool plate side connector
	ES10M(T)	5A (220V) ×10	D/MS3102A28-16P	D/MS3102A28-16S
	ES28M(T)	5A (220V) ×28 ※3	D/MS3102A28-15P	D/MS3102A28-15S
	SC04M(T)	5A (220V) ×28 for signal ※3	D/MS3102A28-15P	D/MS3102A28-15S
		20A (500V) ×4 for servo motor ※4	D/MS3102A20-4P	D/MS3102A20-4S
	SC06M(T)	5A (220V) ×17 for signal	D/MS3102A20-29P	D/MS3102A20-29S
20A (500V) ×5 13A (500V) ×1 } for servo motor ※5		D/MS3102A20-17P	D/MS3102A20-17S	
Fluid module	Code	Self-sealing conduct ports (Master/Tool side)	Self-sealing pneumatic ports (Master side)	
	FD24M(T)	Rc3/8×2	Rc3/8×4	
	FD42M(T)	Rc3/8×4	Rc3/8×2	
	FD40M(T)	Rc3/8×4	—	
	FD02M(T)	—	Rc3/8×2	
	FD04M(T)	—	Rc3/8×4	
	FD06M(T)	—	Rc3/8×6	
	Fluid pressure, 0 ~ Max, 0.68MPa (0 ~ 7kgf/c m ²)			
Primary current module	Code	Capacity	Master plate side connector	Tool plate side connector
	PC3DM(T)	200A (42% usage) 130A in continuous duty 600V ×3	D/MS3102A36-5P	D/MS3102A36-5S
	PC3EM(T)	200A (42% usage) 130A in continuous duty 600V ×3	Seal connector	Seal connector
Interface plate	Code	Type of pattern	Type of insulation	
	SA	6・M10 PCD160	Insulation plate (phenol)	
	SB	To user requirements	Insulation washer (POM)	

GC-300A Ordering Information

Master plate

GC-300A-M-

(Electrical signal module)

ESXX

M

(Fluid module)

FDXX

(Primary current module)

PCXX

(Interface plate)

SA

SB

Tool plate

GC-300A-T-

(Electrical signal module)

ESXX

T

(Fluid module)

FDXX

(Primary current module)

PCXX

ESC0

ESXX

No module

ES28

5A×28※3

ES10

5A×10

SC04

5A×28※3
20A×4 for servo motor ※4

SC06

5A×17
20A×6 for servo motor }※5

ESC0

Cover (Tool plate)

FDXX

No module

FD24

2 coolant parts, 4 pneumatic ports

FD42

4 coolant parts, 2 pneumatic ports

FD40

4 coolant parts, no pneumatic ports

FD02

No coolant part, 2 pneumatic ports

FD04

No coolant part, 4 pneumatic ports

FD06

No coolant part, 6 pneumatic ports

PCXX

No module

PC3D

3 primary current (440V81KVA)

PC3E

3 primary current (440V81KVA)

PC00

Cover (Tool plate)


SA

For PCD160 robot flange

SB

To user requirements

Main Body Dimensions

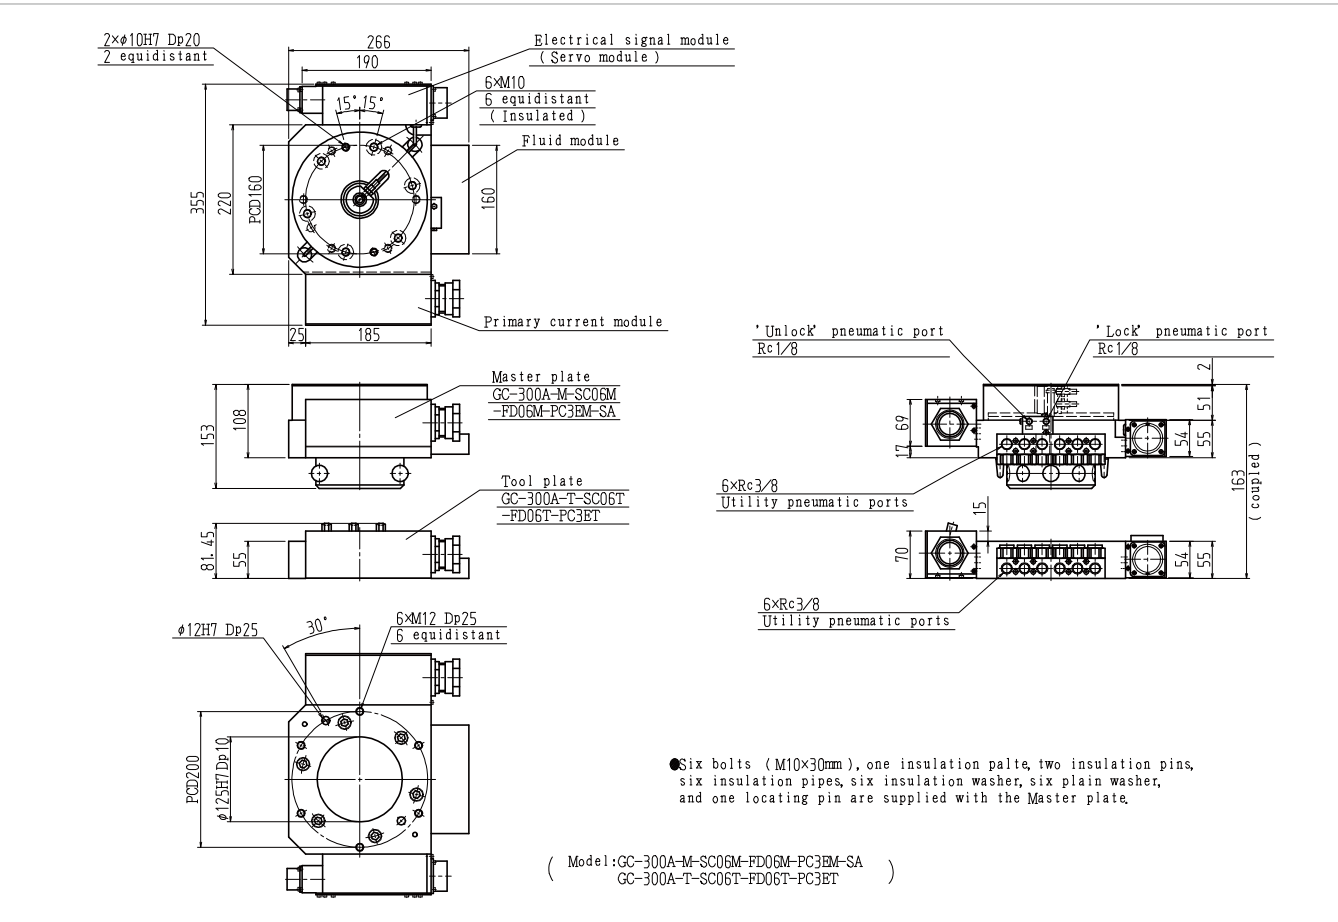

Module

Electrical signal module (Servo module)

Master plate

SC04M. SC06M

Tool plate

SC04T. SC06T

Primary current module

Master plate

PC3DM

Tool plate

PC3DT

Primary current module

Master plate

PC3EM

Tool plate

PC3ET

(Note 1) The connector plug is user-provided.
(Note 2) Please contact BL Autotec, Ltd. for detailed information on the modules.
(Note 3) Please contact BL Autotec, Ltd. for specific applications.
(Note 4) Please refer to the installation & Maintenance Manual when using.

※1 Coupling force is the force to achieve specified repeatability. Coupling will be maintained until unlock pressure is applied or the device is damaged. ※2 Weight shown is of GC-300-ES-28-FD24-PC3E-SA. ※3 Allowable current is total 113.7Afor connector. ※4 Allowable current is total 62.5A for connector. ※5 Allowable current is total 71.6A for connector.

Wire-Saving Module / Contact Block

At the site of FA, it is becoming popular to adapt various network systems in order to reduce wiring. Networks at factories are hierarchically (configurationally) classified by place and information transmission in the network. Our Wire-Saving Module / Contact Block is compliant with networks of several standardized serial data communications and, thus, effective for reducing wiring at factories. We have prepared connectors conforming to several standardized serial data communications.

Contact Blocks that can be equipped with QUICK-CHANGE™ / QUICK-CHANGE ZEUS™ / QUICK-CHANGE GIGA™

Examples of optional modules

Master plate side



DeviceNet with M12 connector type
C1M



CC-Link connector type
C2M



DeviceNet with UN connector type
C3M



PROFIBUS connector type
C4M



Ethernet connector type
C5M



Powered M12 connector type
C6M



Powered UN connector type
C7M

Contact Blocks that can be equipped with QUICK-CHANGE ZEUS™ / QUICK-CHANGE GIGA™

Examples of optional modules (A or B side)


Integrated type



KUKA standard connector type
C1KAM/C1KBM



Ethernet connector type
CSSAM/CSSBM



DeviceNet with M12 connector type
C1EAM/C1KBM



KUKA standard connector type
C16KAT/C16KBT




Ethernet connector type
C5SAT/C5SBT



CC-Link connector type
C2EAT/C2EBT

Combined type



DeviceNet with UN connector type
C7C3AM/C7C3BM




CC-Link & Powered UN connector type
C2C7AM/C2C7BM



PROFIBUS connector & Powered M12 connector type
C6C4AT/C6C4BT



Ethernet & Powered M12 connector type
C5C6AT/C5C6BT



DeviceNet with M12 connector type
C1XAM/C1XBM



PROFIBUS connector type
C4XAT/C4XBT

Conforming to several standardized serial data communications

DeviceNet	Using dedicated thin cable conforming to DeviceNet standard. We have mini-connectors and micro-connectors available.
CC-Link	Using a dedicated Ver. 1.10 compatible CC-Link cable that is a twisted three-core cable with shield. We have M12 Micro type four-contact A-coding connectors available.
PROFIBUS	Using PROFIBUS DP type-A cable that is twisted wiring with shield. We have M12 Micro type four-contact B-coding connectors available.
Industrial Ethernet	We have category 5e equivalent cable with two pairs of shield is used and M12 Micro type four-contact D-coding connectors available. These connectors conform to EtherNet/IP, EtherCAT, PROFINET.

Options

Module for A side and B side

	Model	Capacity and number of contacts	Connector for Master Plate side	Connector for Tool Plate side
Industrial Network Module with attachment	C1XAM(T) C1XBM(T)	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	Micro-style Connector M12, A-coding, 5 contacts Male	Micro-style Connector M12, A-coding, 5 contacts Female
	C2XAM(T) C2XBM(T)	3A (125V) x 4 contacts type for CC-Link *including shield	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female
	C3XAM(T) C3XBM(T)	8A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire	Mini-style Connector 7/8-16UN, 5 contacts Male	Mini-style Connector 7/8-16UN, 5 contacts Female
	C4XAM(T) C4XBM(T)	4A (160V) x 2 contacts type for PROFIBUS connector	Micro-style Connector M12, B-coding, 4 contacts Male	Micro-style Connector M12, B-coding, 4 contacts Female
	C5XAM(T) C5XBM(T)	3A (30V) x 4 contacts type for Ethernet connector	Micro-style Connector M12, D-coding, 4 contacts Female	Micro-style Connector M12, D-coding, 4 contacts Female
	C6XAM(T) C6XBM(T)	3A (125V) x 4 contacts type for Powered M12 connector	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female
	C7XAM(T) C7XBM(T)	13A (25V) x 4 contacts type for Powered UN connector	Mini-style Connector 7/8-16UN, 4 contacts Male	Mini-style Connector 7/8-16UN, 4 contacts Female
	C1SAM(T) C1SBM(T)	Servo Power 20A(500V) x 6 Servo Signal 5A(220V) x 17 3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	D/M3102A20-17P D/M3102A20-29P D/M3102A20-17S D/M3102A20-29S	D/M3102A20-17S D/M3102A20-29S D/M3102A20-17S D/M3102A20-29S
Servo/Industrial Network Module	C2SAM(T) C2SBM(T)	Servo Power 20A(500V) x 6 Servo Signal 5A(220V) x 17 3A (125V) x 4 contacts type for CC-Link *including shield	D/M3102A20-17P D/M3102A20-29P D/M3102A20-17S D/M3102A20-29S	D/M3102A20-17S D/M3102A20-29S D/M3102A20-17S D/M3102A20-29S
	C3SAM(T) C3SBM(T)	Servo Power 20A(500V) x 6 Servo Signal 5A(220V) x 17 8A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire	D/M3102A20-17P D/M3102A20-29P D/M3102A20-17S D/M3102A20-29S	D/M3102A20-17S D/M3102A20-29S D/M3102A20-17S D/M3102A20-29S
	C4SAM(T) C4SBM(T)	Servo Power 20A(500V) x 6 Servo Signal 5A(220V) x 17 4A (160V) x 2 contacts type for PROFIBUS connector	D/M3102A20-17P D/M3102A20-29P D/M3102A20-17S D/M3102A20-29S	D/M3102A20-17S D/M3102A20-29S D/M3102A20-17S D/M3102A20-29S
	C5SAM(T) C5SBM(T)	Servo Power 20A(500V) x 6 Servo Signal 5A(220V) x 17 3A (30V) x 4 contacts type for Ethernet connector	D/M3102A20-17P D/M3102A20-29P D/M3102A20-17S D/M3102A20-29S	D/M3102A20-17S D/M3102A20-29S D/M3102A20-17S D/M3102A20-29S
	C1EAM(T) C1EBM(T)	Servo Power 20A(500V) x 6 3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	D/M3102A20-17P D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S	D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S
	C2EAM(T) C2EBM(T)	Servo Power 20A(500V) x 6 3A (125V) x 4 contacts type for CC-Link *including shield	D/M3102A20-17P D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S	D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S
	C3EAM(T) C3EBM(T)	Servo Power 20A(500V) x 6 8A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire	D/M3102A20-17P D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S	D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S
	C4EAM(T) C4EBM(T)	Servo Power 20A(500V) x 6 4A (160V) x 2 contacts type for PROFIBUS connector	D/M3102A20-17P D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S	D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S
	C5EAM(T) C5EBM(T)	Servo Power 20A(500V) x 6 3A (30V) x 4 contacts type for Ethernet connector	D/M3102A20-17P D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S	D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S D/M3102A20-17S
	C1NAT C1NBT	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	Micro-style Connector M12, A-coding, 5 contacts Male	Micro-style Connector M12, A-coding, 5 contacts Female
	C2NAT C2NBT	3A (125V) x 4 contacts type for CC-Link *including shield	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female
	C3NAT C3NBT	8A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire	Mini-style Connector 7/8-16UN, 5 contacts Male	Mini-style Connector 7/8-16UN, 5 contacts Female
	C4NAT C4NBT	4A (160V) x 2 contacts type for PROFIBUS connector	Micro-style Connector M12, B-coding, 4 contacts Male	Micro-style Connector M12, B-coding, 4 contacts Female
	C5NAT C5NBT	3A (30V) x 4 contacts type for Ethernet connector	Micro-style Connector M12, D-coding, 4 contacts Male	Micro-style Connector M12, D-coding, 4 contacts Female
	C1NAT C1NBT	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	Micro-style Connector M12, A-coding, 5 contacts Male	Micro-style Connector M12, A-coding, 5 contacts Female
	C2NAT C2NBT	3A (125V) x 4 contacts type for CC-Link *including shield	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female

	Model	Capacity and number of contacts	Connector for Master Plate side	Connector for Tool Plate side
Servo/Industrial Network Module for KUKA	C1KAM C1KBM	Servo Power 20A(500V) x 6 *including ground Servo Signal 5A(220V) x 17 *including shield 7A (125V) x 9 contacts type for DeviceNet & Power connector *including drain wire	BEGA116NN00000201000 AEGA052NN00000200000 AEGA113NN00000200000	
	C4KAM C4KBM	Servo Power 20A(500V) x 6 *including ground Servo Signal 5A(220V) x 17 *including shield 7A (125V) x 7 contacts type for PROFIBUS & Power connector *including shield	BEGA116NN00000201000 AEGA052NN00000200000 AEGA113NN00000200000	
	SEKAT SEKBT	Servo Power 20A(500V) x 6 *including ground Servo Signal 7A(160V) x 12 *including shield	BEGA116NN00000201000 AEGA052NN00000200000	
	C16KAT C16KBT	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire 3A (125V) x 4 contacts type for Powered M12 connector		Micro-style Connector M12, A-coding, 5 contacts Female Micro-style Connector M12, A-coding, 4 contacts Female
Industrial Network Module for KUKA	C17KAT C17KBT	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire 7A (25V) x 4 contacts type for Powered UN connector		Micro-style Connector M12, A-coding, 5 contacts Female Mini-style Connector 7/8-16UN, 4 contacts Female
	C36KAT C36KBT	7A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire 3A (125V) x 4 contacts type for Powered M12 connector		Mini-style Connector 7/8-16UN, 5 contacts Female Micro-style Connector M12, A-coding, 4 contacts Female
	C37KAT C37KBT	7A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire 7A (25V) x 4 contacts type for Powered UN connector		Mini-style Connector 7/8-16UN, 5 contacts Female Mini-style Connector 7/8-16UN, 4 contacts Female
	C46KAT C46KBT	4A (160V) x 2 contacts type for PROFIBUS connector 3A (125V) x 4 contacts type for Powered M12 connector		Micro-style Connector M12, B-coding, 4 contacts Female Micro-style Connector M12, A-coding, 4 contacts Female
	C47KAT C47KBT	4A (160V) x 2 contacts type for PROFIBUS connector 7A (25V) x 4 contacts type for Powered UN connector		Micro-style Connector M12, B-coding, 4 contacts Female Mini-style Connector 7/8-16UN, 4 contacts Female

※ The Master for KUKA can be only coupled with the tool for KUKA

Module for C side and D side

	Model	Capacity and number of contacts	Connector for Master Plate side	Connector for Tool Plate side
Industrial Network Module with attachment	C1CM(T) C1DM(T)	3A (60V) x 5 contacts type for DeviceNet M12 connector *including drain wire	Micro-style Connector M12, A-coding, 5 contacts Male	Micro-style Connector M12, A-coding, 5 contacts Female
	C2CM(T) C2DM(T)	3A (125V) x 4 contacts type for CC-Link *including shield	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female
	C3CM(T) C3DM(T)	8A (24V) x 5 contacts type for DeviceNet UN connector *including drain wire	Mini-style Connector 7/8-16UN, 5 contacts Male	Mini-style Connector 7/8-16UN, 5 contacts Female
	C4CM(T) C4DM(T)	4A (160V) x 2 contacts type for PROFIBUS connector	Micro-style Connector M12, B-coding, 4 contacts Male	Micro-style Connector M12, B-coding, 4 contacts Female
	C5CM(T) C5DM(T)	3A (30V) x 4 contacts type for Ethernet connector	Micro-style Connector M12, D-coding, 4 contacts Male	Micro-style Connector M12, D-coding, 4 contacts Female
	C6CM(T) C6DM(T)	3A (125V) x 4 contacts type for Powered M12 connector	Micro-style Connector M12, A-coding, 4 contacts Male	Micro-style Connector M12, A-coding, 4 contacts Female
	C7CM(T) C7DM(T)	13A (25V) x 4 contacts type for Powered UN connector	Mini-style Connector 7/8-16UN, 4 contacts Male	Mini-style Connector 7/8-16UN, 4 contacts Female

Details of Attachment part number


Abbreviation	Module part number	Details
J	J16A	5A x 16 (JM connector)
M	M10A	13A x 10 (MS connector)
MW	M10WA	13A x 10 (Drip-Proof MS connector)
R	R16	5A x 16 (Connector-less specification for Tool side only)
BN	BFN	Non-Contact Electric Signal Block with 15 contacts, NPN Output only for Master side
BP	BFP	Non-Contact Electric Signal Block with 15 contacts, PNP Output only for Master side
BD	BFD	Non-Contact Electric Signal Block with 15 contacts, Sensor Input only for Tool side
C1	C1	DeviceNet M12 connector
C2	C2	CC-Link connector
C3	C3	DeviceNet UN connector
C4	C4	PROFIBUS connector
C5	C5	Ethernet connector
C6	C6	Powered M12 connector
C7	C7	Powered UN connector

Examples

JMAM	J16+M10 A Side Master
XMBM	No option +M10 B Side Master
JCIAT	J16+C1 A Side Tool

C1XAM : DeviceNet M12 Connector

+No option A Side Master



※ Please Keep in mind that compared to the picture above left and right will be opposite in actual installation

Non-contact electric signal block

Non-contact electric signal block (Remote Sensor Modules) can be equipped on BL Quick-Change to transmit signals in dusty or wet environments.

Applications

- Tool changes requiring proximity sensors for signal transmission in welding processes with sputter or fumes.
- Tool changes requiring proximity sensors for signal transmission in processes using coolants or cleaning processes using water.

Features

- Contact-free sensor input signal transmission without contact (Up to 15 lines, two wire systems, 12V)
- The IP67-structure in the signal transmission unit has superior resistance to dust and water, and the contacts are maintenance-free.
- Long service life without abrasion to the contacts.

Applicable models

- Flex-40B, QC-60D, Flex-70A, Flex-100B, QCP-100A, QC-150C, QCP-220, Flex-300A, ZEUS, GIGA




Quick-Change Flex-100B with Non-contact electric signal block (Box shape, 15 signals)

Specifications

Master side (output sensor)		
Model	NPN output	B15N-M
	PNP output	B15P-M
Connector	WEBR-2119MS-D	
Power source	24V DC + 10 ~ 20% (including ripple)	
Consumption current	≤ 500mA	
Number of output signals	15 + 1 (In-zone)	
Load current	≤ 50mA / 1 output	
Response frequency	20Hz	
LED indicator	In-zone display	
Operating temperature	0 ~ +50℃	
Protective structure	IP67	
Weight	Module 240g	

Tool side (transmitter)	
Model	B15D-T
Connector	WEBR-2116FS-D
Drive voltage	12V ± 1.5V DC
Wiring	2-wire DC
Number of input signals	15
Drive current	5mA
Operating temperature	0 ~ +50℃
Protective structure	IP67
Weight	Module 244g


Non-contact electric signal block function

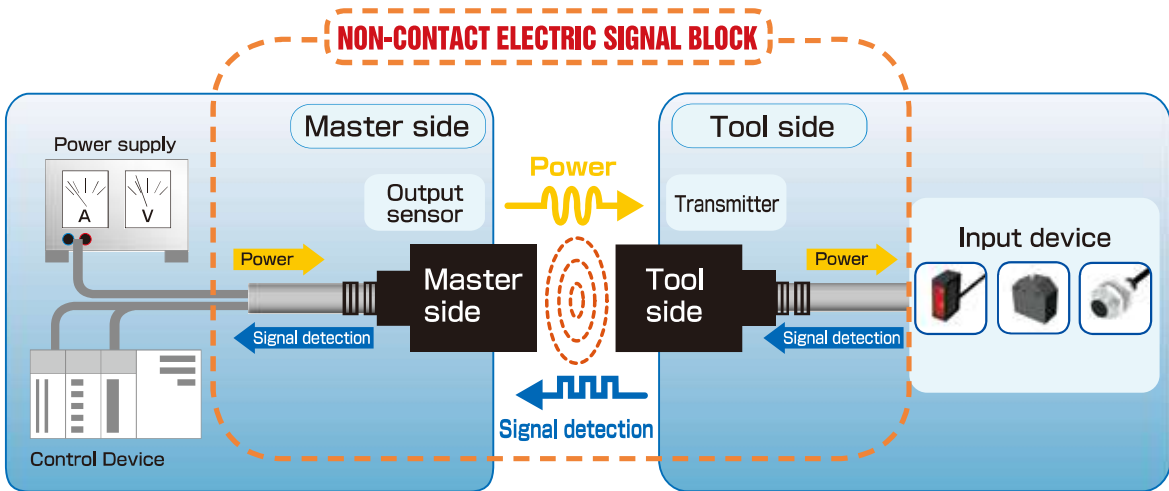

Non-contact electric signal block simultaneously provide power and transmit wireless signals to equipment, using an output unit and a transmitter. Output for power and controls are connected to the master side. Sensors are connected to the tool side for signal transmission.

Non-contact electric signal block


Non-contact electric signal block provide power supply and signal transmission for electromagnetic coupling. Power supply and signal transmission occur when the transmitting side enters the field of the output unit.

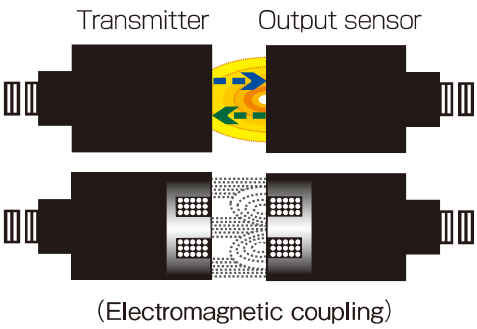


Wiring diagram

DC2W switch connection spec (including contact switch)

■ NPN connection : B15D-T ~ B15N-M

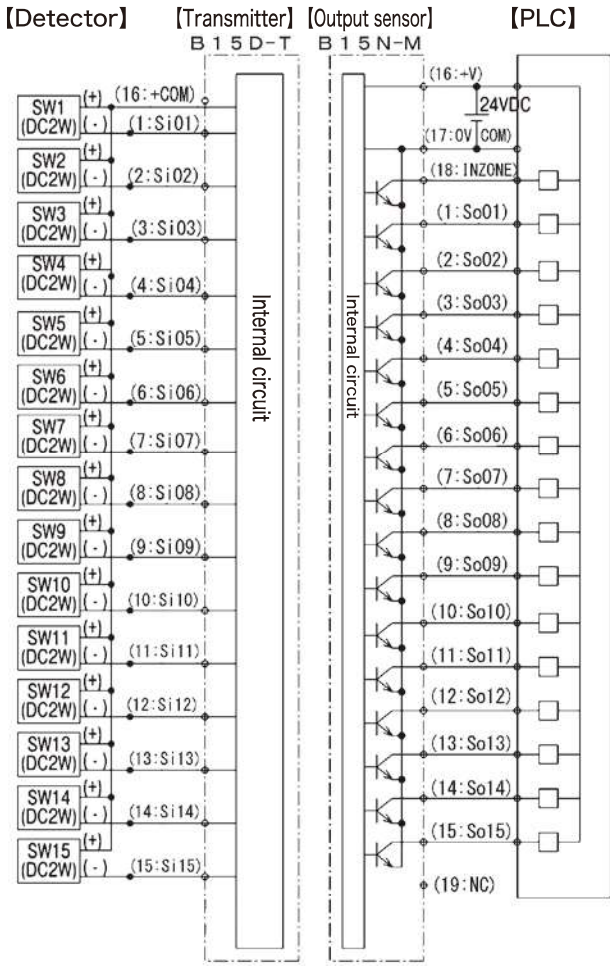





■ PNP connection : B15D-T ~ B15P-M

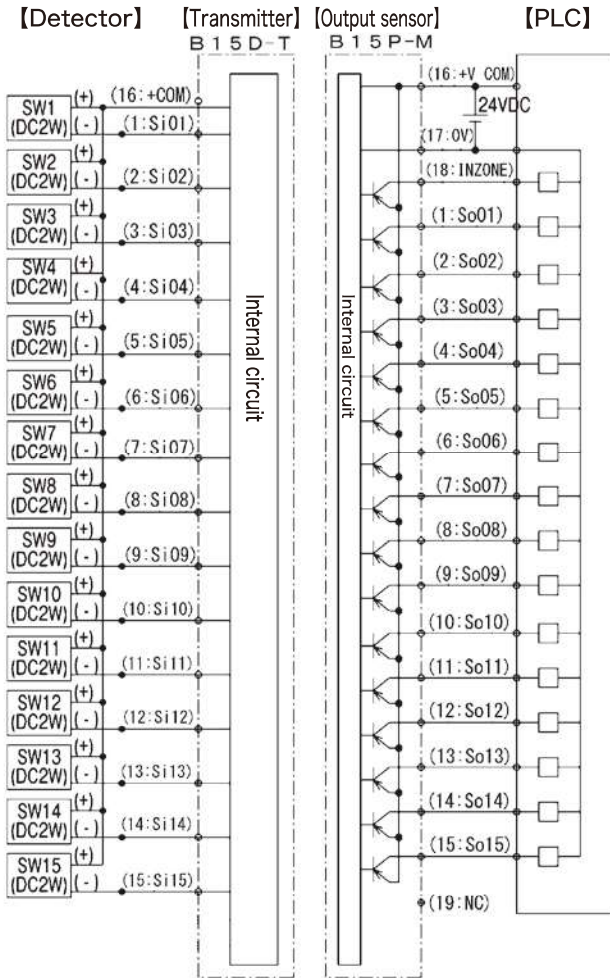

BL QUICK-CHANGE™ Options (QCE, QC, Light, Flex, QCP, USP Series)


1. Electric Signal Contact Block

※ Tool weight in parentheses

Type	QC model	Pictures		Spec. & weight	Features & Remarks
D-M(T)	QC-1			3A×10 DC50V 8g (8g) ※	*Spring probe pressing method *Solder terminal
H10A-M(T)	Light-5A			3A×10 DC50V 11g (10g) ※	*Spring probe pressing method *Solder terminal
H20A-M(T)	Light-5A			3A×20 DC50V 24g (22g) ※	*Spring probe pressing method *Solder terminal
H30A-M(T)	Light-5A			3A×30 DC50V 36g (34g) ※	*Spring probe pressing method *Solder terminal
H10L-M(T)	Light-5A			3A×10 DC50V 11g(10g)	*Spring probe pressing method *With 1m lead wire
H20L-M(T)	Light-5A			3A×20 DC50V 24g(22g)	*Spring probe pressing method *With 1m lead wire
K10A-M(T)	QC-10B			3A×10 DC50V 15g (13g) ※	*Spring probe pressing method *Solder terminal
K20A-M(T)	QC-10B			3A×20 DC50V 23g (20g) ※	*Spring probe pressing method *Solder terminal
K10L-M(T)	QC-10B			3A×10 DC50V 15g (13g) ※	*Spring probe pressing method *With 1m lead wire
K20L-M(T)	QC-10B			3A×20 DC50V 23g (20g) ※	*Spring probe pressing method *With 1m lead wire
D15N-M(T)	QC-20D, QC-60D			3A×15 DC50V 30g (21g) ※	*Spring probe pressing method
D15Y-M(T) D15A, B-M(T) D15U-M(T)	QC-60D Flex-40B Flex-70A, 100B USP-100A			3A×15 DC50V Y : 87g (73g) ※ A, B : 62g (51g) ※ U: 90g(70g) ※	*Spring probe pressing method *With mounting plate
D37N-M(T) D37Z-M(T)	QC-150C			3A×37 DC50V N : 65g (50g) ※ Z : 220g (180g) ※	*Spring probe pressing method *D37Z comes with mounting plate

BL QUICK-CHANGE™ Options (QCE, QC, Light, Flex, QCP, USP, ZEUS, GIGA Series)

※ Tool weight in parentheses

Type	QC model	Pictures		Spec. & weight	Features & Remarks
J16A, B, Z-M(T) J16Y-M(T) *J32A, B	QCE-40, Flex-40B Flex-70A, 100B QCP-100A, QC-150C QCP-220 (T), Flex-300A QC-60D (取付板付) ZEUS, GIGA *Flex-300Aonly	 		5A×16 DC/AC200V 170g(140g) ※ <u>220g(190g) ※</u> └─ J16Y	*Spring probe pressing method *Labyrinth structure block ※J32A, B: Parallel mounting of J16A, B: weight doubled
L16A-M	QCP-100A, 220 ZEUS, GIGA Master side only	 		5A×16 DC/AC200V 200g	*Spring probe pressing method *Built-in lock/unlock signal
R16A-T R16B-T	QCP-100A ZEUS, GIGA Tool side only			5A×1 DC/AC200V 80g	*No Connector (Metal cover) *Cable exits in Z direction (soldered)
A16A, B-M(T) A16Z-M(T)	QCE-40, Flex-40B, 70A QC-150C ZEUS, GIGA	 		5A×16 DC/AC200V 200g(160g) ※	*Added approach sensor function
M10A, B, Z-M (T) M10Y-M(T) *M20A, B	QCE-40, Flex-40B Flex-70A, 100B QCP-100A, QC-150C QCP-220, Flex-300A QC-60D (with mounting plate) ZEUS, GIGA *Flex-300A only	 		13A×10 DC250V/AC200V 260g(220g) ※ <u>310g(260g) ※</u> └─ M10Y	*Insertion contacts *Labyrinth structure block ※M20A, B: Parallel mounting of M10A, B: weight doubled
L07A-M(T)	QCP-100A ZEUS, GIGA Master side only			13A×7 DC250V/AC200V 290g	*Insertion contacts *Labyrinth structure block ※Built-in three lock/unlock signals
A08A, B-M(T) A08-ZM(T)	QCE-40, Flex-40B Flex-70A QC-150C ZEUS, GIGA	 		13A×8 DC250V/AC200V 290g(240g) ※	*Added approach sensor function ※Built-in two sensor signals
B15N-M B15P-M	Flex-40B, QC-60D Flex-70A, 100B QCP-100A, QC-150C QCP-220, Flex-300A ZEUS, GIGA Master side only			50mA×15 DC24V 240g	・ Non-contact signal transmission ・ 12V 2 wire system, Max.15 signals ・ Correspond IP67 (Waterproof, Dust-proof structure)
B15D-T	Flex-40B, QC-60D Flex-70A, 100B QCP-100A, QC-150C QCP-220, Flex-300A ZEUS, GIGA Tool side only			5mA×15 DC12V 244g	・ Non-contact signal transmission ・ 12V 2 wire system, Max.15 signals ・ Correspond IP67 (Waterproof, Dust-proof structure)

BL QUICK-CHANGE™ Options (QCE, QC, Light, Flex, QCP, USP, ZEUS, GIGA Series)


2.Ground (for Spot-welding material handling) ※ Tool weight in parentheses

Type	QC model	Pictures		Spec. & weight	Features & Remarks
E50A, B-M(T) E50Z-M (T)	Flex-70A, 100B, 300A QC-150C ZEUS, GIGA ※Available for other models. Please contact us.			500A×1 750g (280g) ※	50% usage rate

3.Lock/unlock sensor (with robot adaptor plate) ※ Tool weight in parentheses


Type	QC model	Pictures		Spec. & weight	Features & Remarks
SA SB	Flex-40B, QC-60D Flex-70A, Flex-100B QC-150C, Flex-300A QCP-100	(Sample picture shows SA for QC-60C)		Two-wire proximity sensor T = about 40mm or more	SA: Customer processes the adaptor plate SB: BL Autotec process the adaptor plate

4.Pneumatic ports (Additional) ※ Tool weight in parentheses

Type	QC model	Pictures		Spec. flow (Nl/min) & weight	Features & Remarks
P-M(T)	QC-1			Positive pressure M3×2 11g(8g)	
V-M(T)	QC-1			Negative pressure M3×2 13g(8g)	
P18A-M(T) P18B-M(T) P18Z-M(T)	Flex-40B, 70A, 100B Flex-300A QC-150C			Rc1/8×4 200 ~ 1,000 160g (160g) ※	*The flow per port varies, based on inside diameter of hose of 3 ~ 7.5.
P18Y	QC-60D	※High Electrical Current Module		Same as above	Same as above
P14A-M(T) P14B-M(T) P14Z-M(T)	Flex-40B, 70A, 100B Flex-300A QC-150C			Rc1/4×2 300 ~ 1,800 140g (140g) ※	*The flow per port varies, based on inside diameter of hose of 3 ~ 9.0.
P14Y	QC-60D	※High Electrical Current Module		Same as above	Same as above
P38A P38B P38Z	Flex-100B Flex-300A QC-150C			Rc3/8×4 700 ~ 4,000 380g (370g) ※	*The flow per port varies, based on inside diameter of hose of 4.5 ~ 13.0.
P3WA P3WB P3WZ	Flex-70A, 100B Flex-300A QC-150C			Rc3/8×2 700 ~ 4,000 200g (190g) ※	*The flow per port varies, based on inside diameter of hose of 4.5 ~ 13.0.

BL QUICK-CHANGE™ Options (QCE, QC, Light, Flex, QCP, USP Series)

5.Individually-ordered manufacturing examples

Type	QC model	Pictures		Spec.	Features & Remarks
Remote Sensor Module	Flex-40B, QC-60D Flex-70A, Flex-100B QC-150C, Flex-300A			With mounting plate for items shown above	*Non-contact remote sensor *IP67 support *Withanti-spatter specification
Hige Electrical Current Module	Flex-100B QC-150C Flex-300A			35A×4	*High electrical current power transmission
20-contact Insertion Module	QC-150C QCP-220 Flex-300A			5A×20 DC250V/AC200V	*Insertion contacts *Labyrinth structure block *Can be used with 13A spec
Z Direction Wiring Harness Module	Flex-40B, QC-60D Flex-70A, Flex-100B QCP-100A, QC-150C QCP-220 (T), Flex-300A	 (The Master side is shown)		5A×16 DC/AC200V	*Harness connection with cable exit in Z direction to avoid interference *Available with insertion contact block *May be combined with standard contact blocks

BL QUICK-CHANGE Options (QCE, QC, Light, Flex, QCP, USP Series)

Contact Block Option Installation Table

※ ○: May be installed on the mounting surface shown; —: no standard installation (contact us for non-standard applications)

Contact block	QC-1	Light-5A	QC-10B	QC-20D	Flex-40B	QC-60D	Flex-70A	Flex-100B	QCP-100A	QC-150C	QCP-220	Flex-300A	USP-100A
H10A	—	○	—	△	△	△	△	△	△	△	△	△	△
H20A	—	○	—	△	△	△	△	△	△	△	△	△	△
H30A	—	○	—	△	△	△	△	△	△	△	△	△	△
H10L	—	○	—	△	△	△	△	△	△	△	△	△	△
H20L	—	○	—	△	△	△	△	△	△	△	△	△	△
K10A	—	—	○	△	△	△	△	△	△	△	△	△	△
K20A	—	—	○	△	△	△	△	△	△	△	△	△	△
K10L	—	—	○	△	△	△	△	△	△	△	△	△	△
K20L	—	—	○	△	△	△	△	△	△	△	△	△	△
D15	—	—	—	○	A B	N Y	A B	A B	△	△	△	△	U
D37	—	—	—	△	△	△	△	△	△	N Z	△	△	△
J16	—	—	—	—	A B	Y	A B	A B	A B	Z	A B	A B	△
J32	—	—	—	—	A B	Y	A B	A B	A B	Z	A B	A B	△
L16-M	—	—	—	—	△	△	△	△	A	△	A	△	△
R16-T	—	—	—	—	△	△	△	△	A B	△	△	△	△
A16	—	—	—	—	A B	△	A B	△	△	Z	△	△	△
M10	—	—	—	—	A B	Y	A B	A B	A B	Z	B	A B	△
M20	—	—	—	—	A B	Y	A B	A B	A B	Z	B	A B	△
L07-M	—	—	—	—	△	△	△	△	A	△	△	△	△
A08	—	—	—	—	A B	△	A B	△	△	Z	△	△	△
B-15	—	—	—	—	A B	Y	A B	A B	A B	Z	B	A B	△

※Note 1: When using real time communications with reduced wiring or servo encoder signals, use M10, L07M, A08 insertion contacts. ※Note 2: Indicate J32A (B) when installing two J16A(B) on Flex-300, and M20A(B) when installing two M10A(B). ※Note 3: L16M/L07M can only be installed on the master side and R16T can only be installed on the tool side.

Ground	QC-1	Light-5A	QC-10B	QC-20D	Flex-40B	QC-60D	Flex-70A	Flex-100B	QCP-100A	QC-150C	QCP-220	Flex-300A	USP-100A
E50	—	—	—	—	—	—	A B	A B	△	Z	△	A B	△
Pneumatic ports	QC-1	Light-5A	QC-10B	QC-20D	Flex-40B	QC-60D	Flex-70A	Flex-100B	QCP-100A	QC-150C	QCP-220	Flex-300A	USP-100A
P	A1,A2 B1,B2	—	—	—	—	—	—	—	—	—	—	—	—
V	A1,A2 B1,B2	—	—	—	—	—	—	—	—	—	—	—	—
P18	—	—	—	—	A B	Y	A B	A B	△	Z	△	A B	△
P14	—	—	—	—	A B	Y	A B	A B	△	Z	△	A B	△
P38	—	—	—	—	△	△	△	A B	A B	Z	B	A B	△
P3W	—	—	—	—	△	△	A B	A B	△	Z	B	A B	△

BL QUICK-CHANGE™

Electric Contact Block Connector Table

Contact block	Master side Tool side	Plug (Plugs made by DDK Inc.)	Shape	Cable clamp
Flex-100B Flex-300A	Master side	D/MS3106A18-1S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1S	Divided-shell L type	D/MS3057-10A
Flex-100B Flex-300A	Tool side	D/MS3106A14S-5P	Solid-shell S type	D/MS3057-6A
		D/MS3106B14S-5P	Divided-shell S type	D/MS3057-6A
		D/MS3108B14S-5P	Divided-shell L type	D/MS3057-6A
ZEUS GIGA	Master side	D/MS3106A24-28S	Solid-shell S type	D/MS3057-16A
		D/MS3106B24-28S	Divided-shell S type	D/MS3057-16A
		D/MS3108B24-28S	Divided-shell L type	D/MS3057-16A
ZEUS GIGA	Tool side	D/MS3106A24-28P	Solid-shell S type	D/MS3057-16A
		D/MS3106B24-28P	Divided-shell S type	D/MS3057-16A
		D/MS3108B24-28P	Divided-shell L type	D/MS3057-16A

BL QUICK-CHANGE QC/Light/Flex/QCP/USP/QCE/ZEUS/GIGA Series

Electric Contact Block Connector Table

Contact block	Master side Tool side	Plug (Plugs made by DDK Inc.)	Shape	Cable clamp
D15A, B, N, Y	Master side	17JE-23150-02(D8A)-CG	Flat	No
	Tool side			
D37N, Z	Master side	17JE-23370-02(D8A)-CG	Flat	No
	Tool side			
J16A, Y, Z-M	Master side	JMSP-2116F-D	Straight type	No
		JMLP-2116F-D	90 degree type	No
J16A, Y, Z-T	Tool side	JMSP-2116M-D	Straight type	No
		JMLP-2116M-D	90 degree type	No
J16B-M	Master side	JMSP-2116FX-D	Straight type	No
		JMLP-2116FX-D	90 degree type	No
J16B-T	Tool side	JMSP-2116MX-D	Straight type	No
		JMLP-2116MX-D	90 degree type	No
L16A-M	Master side	JMSP-2119F-D	Straight type	No
		JMLP-2119F-D	90 degree type	No
A16A, Z-M	Master side	JMSP-2119F-D	Straight type	No
		JMLP-2119F-D	90 degree type	No
A16A, Z-T	Tool side	JMSP-2116M-D	Straight type	No
		JMLP-2116M-D	90 degree type	No
A16B-M	Master side	JMSP-2119FX-D	Straight type	No
		JMLP-2119FX-D	90 degree type	No
J16B-T	Tool side	JMSP-2116MX-D	Straight type	No
		JMLP-2116MX-D	90 degree type	No
M10A, Y, Z-M	Master side	D/MS3106A18-1S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1S	Divided-shell L type	D/MS3057-10A
M10A, Y, Z-T	Tool side	D/MS3106A18-1P	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1P	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1P	Divided-shell L type	D/MS3057-10A
M10B-M	Master side	D/MS3106A18-19S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-19S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-19S	Divided-shell L type	D/MS3057-10A
M10B-T	Tool side	D/MS3106A18-19P	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-19P	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-19P	Divided-shell L type	D/MS3057-10A
M06Y-M	Master side	D/MS3106A14S-6S	Solid S type	D/MS3057-6A
		D/MS3106B14S-6S	Divided S type	D/MS3057-6A
		D/MS3108B14S-6S	Divided L type	D/MS3057-6A
M06Y-T	Tool side	D/MS3106A14S-6P	Solid S type	D/MS3057-6A
		D/MS3106B14S-6P	Divided S type	D/MS3057-6A
		D/MS3108B14S-6P	Divided L type	D/MS3057-6A
L07A-M	Master side	D/MS3106A18-1S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1S	Divided-shell L type	D/MS3057-10A
A08A, Z-M	Master side	D/MS3106A18-1S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1S	Divided-shell L type	D/MS3057-10A
A08A, Z-T	Tool side	D/MS3106A18-1P	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-1P	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-1P	Divided-shell L type	D/MS3057-10A
A08B-M	Master side	D/MS3106A18-19S	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-19S	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-19S	Divided-shell L type	D/MS3057-10A
A08A, Z-T	Tool side	D/MS3106A18-19P	Solid-shell S type	D/MS3057-10A
		D/MS3106B18-19P	Divided-shell S type	D/MS3057-10A
		D/MS3108B18-19P	Divided-shell L type	D/MS3057-10A
B15N(P)A, B, Y, Z-M	Master side	WEBS P2119F-1-D	Straight type	No
B15DA, B, Y, Z-T	Tool side	WEBS P2116M-1-D	Straight type	No

BL QUICK-CHANGE™ Options (ZEUS, GIGA Series)




Electric Contact Block Connector Table

Contact block	Master side Tool side	Plug (Plugs made by DDK Inc.)	Shape	Cable clamp	
Servo module	SEA, B-M	Master side	D/MS3106A20-17S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-17S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-17S	Divided-shell L type	D/MS3057-12A
		Master side	D/MS3106A20-29S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29S	Divided-shell L type	D/MS3057-12A
	SEA, B-T	Tool side	D/MS3106A20-17P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-17P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-17P	Divided-shell L type	D/MS3057-12A
		Tool side	D/MS3106A20-29P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29P	Divided-shell L type	D/MS3057-12A
	SEYA, B-M	Master side	D/MS3106A20-15S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-15S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-15S	Divided-shell L type	D/MS3057-12A
		Master side	D/MS3106A20-29S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29S	Divided-shell L type	D/MS3057-12A
	SEYA, B-T	Tool side	D/MS3106A20-15P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-15P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-15P	Divided-shell L type	D/MS3057-12A
		Tool side	D/MS3106A20-29P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29P	Divided-shell L type	D/MS3057-12A
	SEPA, B-M	Master side	D/MS3106A20-17S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-17S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-17S	Divided-shell L type	D/MS3057-12A
		Master side	D/MS3106A20-29S	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29S	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29S	Divided-shell L type	D/MS3057-12A
		Master side	D/MS3106A28-21S	Solid-shell S type	D/MS3057-16A
			D/MS3106B28-21S	Divided-shell S type	D/MS3057-16A
			D/MS3108B28-21S	Divided-shell L type	D/MS3057-16A
	SEPA, B-T	Tool side	D/MS3106A20-17P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-17P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-17P	Divided-shell L type	D/MS3057-12A
		Tool side	D/MS3106A20-29P	Solid-shell S type	D/MS3057-12A
			D/MS3106B20-29P	Divided-shell S type	D/MS3057-12A
			D/MS3108B20-29P	Divided-shell L type	D/MS3057-12A
		Tool side	D/MS3106A28-21P	Solid-shell S type	D/MS3057-16A
			D/MS3106B28-21P	Divided-shell S type	D/MS3057-16A
			D/MS3108B28-21P	Divided-shell L type	D/MS3057-16A
Electric signal module	J, B, C, D-M	Master side	JMSP-2116F-D	Straight type	No
			JMLP-2116F-D	90 degree type	No
		Tool side	JMSP-2116M-D	Straight type	No
	J, B, C, D-T	Master side	JMSP-2116M-D	Straight type	No
			JMLP-2116M-D	90 degree type	No
		Tool side	JMSP-2116M-D	Straight type	No
	BN, B, C, D-M	Master side	WEBS P2119F-1-D	Straight type	No
			WEBS P2119F-1-D	Straight type	No
		Tool side	WEBS P2116M-1-D	Straight type	No
	MC, D-M	Master side	D/MS3106A18-1S	Solid-shell S type	D/MS3057-10A
			D/MS3106B18-1S	Divided-shell S type	D/MS3057-10A
		Tool side	D/MS3108B18-1S	Divided-shell L type	D/MS3057-10A
	MC, D-T	Tool side	D/MS3106A18-1P	Solid-shell S type	D/MS3057-10A
			D/MS3106B18-1P	Divided-shell S type	D/MS3057-10A
		Tool side	D/MS3108B18-1P	Divided-shell L type	D/MS3057-10A
	MW A,B,C,D-T *	Master side	D/MS3106 18-1S(D190)	Solid-shell straight type	CE3507-10A
		Tool side	D/MS3106 18-1P(D190)	CE02-18BS-S-D	Solid-shell straight type
				CE-18BA-S-D	
Primary current module	WPC, D-M	Master side	D/MS3106A36-3S	Solid-shell S type	D/MS3057-24A
			D/MS3106B36-3S	Divided-shell S type	D/MS3057-24A
		Tool side	D/MS3108B36-3S	Divided-shell L type	D/MS3057-24A
	WPC, D-T	Tool side	D/MS3106A36-3P	Solid-shell S type	D/MS3057-24A
			D/MS3106B36-3P	Divided-shell S type	D/MS3057-24A
		Tool side	D/MS3108B36-3P	Divided-shell L type	D/MS3057-24A
	WSC, D-M	Master side	Connector-less (Wiring to terminal)		
	WSC, D-T	Tool side			

BL QUICK-CHANGE™ Options (Gun-Changer Series)

1.Electric signal modules

※ Weights are approximate

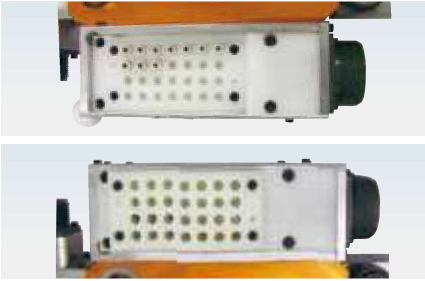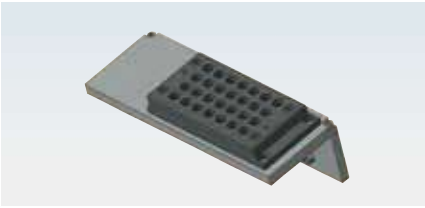Type	QC model	Pictures	Spec. & weight	Features & Remarks
ES10M(T) EL10M(T)	GC-300A		5A (220V) ×10 ※0.8kg (M (T))	*EL10 has a LED lock/unlock indication: insertion method contact
ES28M(T) EL28M(T)	GC-300A	 (EL 10M & T shown above)	5A (220) ×28 ※0.9kg (M (T))	*EL28 has a LED lock/unlock indication: insertion method contact
ESC0T EMC0T	GC-300A		Tool side electric signal cover	*Protective or safety cover for master side electric signal module

2.Servo module

※ Weights are approximate


Type	QC model	Pictures	Spec. & weight	Features & Remarks
SC04M(T)	GC-300A		5A (220V) ×28 20A (500V) ×4 ※1.1kg (M (T))	*Insertion method contact
SC06M(T)	GC-300A	 (SM06M/SM06T shown above)	5A (220V) ×17 20A (500V) ×6 ※1.1kg (M (T))	*Insertion method contact

3.Fluid module


※ Weights are approximate

Type	QC model	Pictures	Spec. & weight	Features & Remarks
FD X X (M, T) No. of pneumatic ports No. of coolant ports	GC-300A	 (FD42M shown above, FD42T shown below)	FD02M (T) : ※1.8kg FD04M (T) : ※1.9kg FD06M (T) : ※2.0kg FD24M (T) : ※2.0kg FD42M (T) : ※2.0kg FD60M (T) : ※2.0kg	*Maximum of 6ports; coolant ports (self-sealing on master and tool sides) and pneumatic ports (self-sealing on master side. *Freely select any combination of coolant and pneumatic ports.

BL QUICK-CHANGE™ Options Table (Gun-Changer Series)

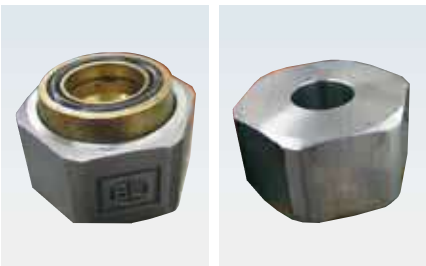Type	QC model	Pictures	Spec. & weight	Features & Remarks
Socket plugs for coolant port	GC-300A		Discharge rate: 8ℓ per minute Effective cross-section area: 30.1mm²	
Socket plugs for pneumatic ports	GC-300A		Discharge rate: 9ℓ per minute Effective cross-section area: 33.9mm²	

4.Primary feed module

Type	QC model	Pictures	Spec. & weight	Features & Remarks
PC3CM(T)	GC-300A		200A (25% use rate) 100A continuous duty (600V) , 63KVA 5A (220V) ×3 approx. 2.0kg approx. (2.0kg)	*Contact for thermo-signal *Support #1 contact
PC3DM(T)	GC-300A		200A (42% use rate) 130A continuous duty (600V) , 81KVA approx. 2.1kg approx. (1.8kg)	*Support #0 contact
PC3EM(T)	GC-300A		200A (42% use rate) 130A continuous duty (600V) , 81KVA approx. 2.0kg approx. (1.7kg)	*NIPOSEAL connector *Waterproof seal *Crimping terminal (M8) connection
PCC0T	GC-300A-T	 (Installation example)	Tool side primary feed cover	Safety cover not attached to primary current module when Gun/Hand combination used.

BL QUICK-CHANGE™ Options (Gun-Changer Series)

Module Connector Table

Contact block	Master side Tool side	Plug (Plugs made by DDK Inc.)	Shape	Cable clamp
Electric signal module ES10M(GC-300A)	Master side	D/MS3106B28-16S	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-16S	Divided-shell L type	D/MS3057-16A
Electric signal module ES10T(GC-300A)	Tool side	D/MS3106B28-16P	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-16P	Divided-shell L type	D/MS3057-16A
Electric signal module ES28M(GC-300A)	Master side	D/MS3106B28-15S	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-15S	Divided-shell L type	D/MS3057-16A
Electric signal module ES28T(GC-300A)	Tool side	D/MS3106B28-15P	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-15P	Divided-shell L type	D/MS3057-16A
Servo module (signal) SC04M(GC-300A)	Master side	D/MS3106B28-15S	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-15S	Divided-shell L type	D/MS3057-16A
Servo module (signal) SC04T(GC-300A)	Tool side	D/MS3106B28-15P	Divided-shell S type	D/MS3057-16A
		D/MS3108B28-15P	Divided-shell L type	D/MS3057-16A
Servo module (motor) SC04M(GC-300A)	Master side	D/MS3106B20-4S	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-4S	Divided-shell L type	D/MS3057-12A
Servo module (motor) SC04T(GC-300A)	Tool side	D/MS3106B20-4P	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-4P	Divided-shell L type	D/MS3057-12A
Servo module (signal) SC06M(GC-300A)	Master side	D/MS3106B20-29S	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-29S	Divided-shell L type	D/MS3057-12A
Servo module (signal) SC06T(GC-300A)	Tool side	D/MS3106B20-29P	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-29P	Divided-shell L type	D/MS3057-12A
Servo module (motor) SC06M(GC-300A)	Master side	D/MS3106B20-17S	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-17S	Divided-shell L type	D/MS3057-12A
Servo module (motor) SC06T(GC-300A)	Tool side	D/MS3106B20-17P	Divided-shell S type	D/MS3057-12A
		D/MS3108B20-17P	Divided-shell L type	D/MS3057-12A
Primary current module PC3CM(GC-300A)	Master side	D/MS3106B36-3S	Divided-shell S type	D/MS3057-24A
		D/MS3108B36-3S	Divided-shell L type	D/MS3057-24A
Primary current module PC3CT(GC-300A)	Tool side	D/MS3106B36-3P	Divided-shell S type	D/MS3057-24A
		D/MS3108B36-3P	Divided-shell L type	D/MS3057-24A
Primary current module PC3DM(GC300A)	Master side	D/MS3106B36-5S	Divided-shell S type	D/MS3057-24A
		D/MS3108B36-5S	Divided-shell L type	D/MS3057-24A
Primary current module PC3DT(GC-300A)	Tool side	D/MS3106B36-5P	Divided-shell S type	D/MS3057-24A
		D/MS3108B36-5P	Divided-shell L type	D/MS3057-24A

MEMO


[illegible]

Coupling and Uncoupling Mechanism

The BL Quick-Change has a superior fail-safe locking mechanism, and the Master and Tool plate will not separate even if locking air pressure is shut off. When lock air pressure is supplied, the ball-locking mechanism enables coupling force of 10 times or more of load capacity. And the BL Quick-Change maintains positional repeatability at specified levels, even after one million operating cycles under normal operating conditions.


1. Uncoupled state (unlocked)

The piston and cam are forced down by supplying air to the lock port. The steel balls are not locked into place.

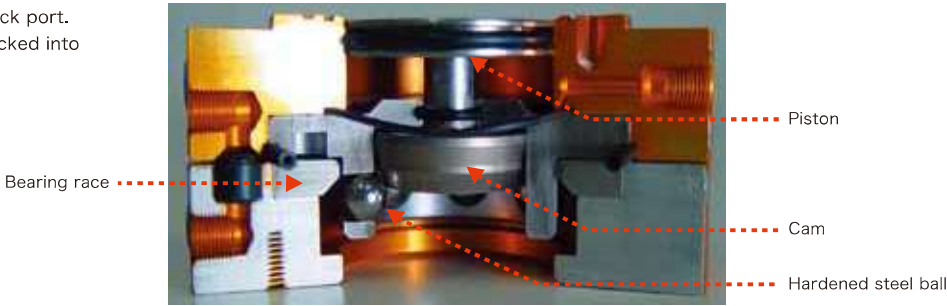



2. Coupling

The piston and cam are forced down by supplying air to the lock port. The steel balls are pushed out by the cam's first taper.

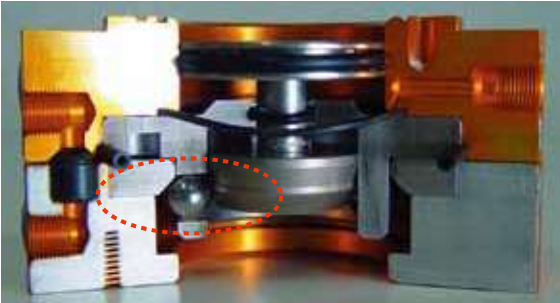


3. Coupled (locked)

The Master and Tool plate lock together by the coupling force created when the cam's second taper presses against the steel balls.

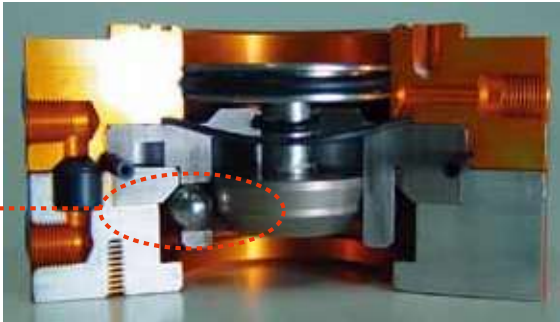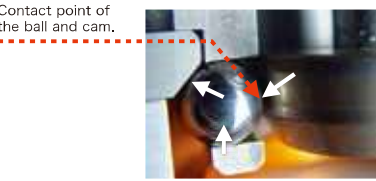


4. Fail-safe mode

The ball remains in the locking ring of the Tool plate. The Tool plate cannot be separated from the Master plate until air pressure is again supplied to the unlock port.

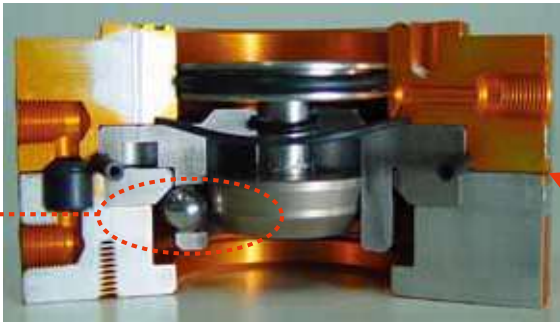

[Recovery method]
In reference to the "coupling method" on the next page, after unlocking operation, return to normal coupling state by carrying out locking operation.


In fail-safe state, there is a slight clearance made between the Master Plate and the Tool Plate.

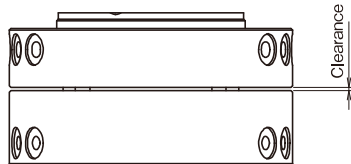


Lock/Unlock Sensors

An optional lock/unlock sensor makes lock/unlock state confirmation available by two proximity sensors (built in interface plate) that detect the positions of dogs assembled on the piston. (The lock/unlock sensors of QCP-220, GIGA, and ZEUS models are built-in to the Master Plate.)


Two-position detection lock/unlock sensor: Flex-40B, Flex-70A, QC-60D

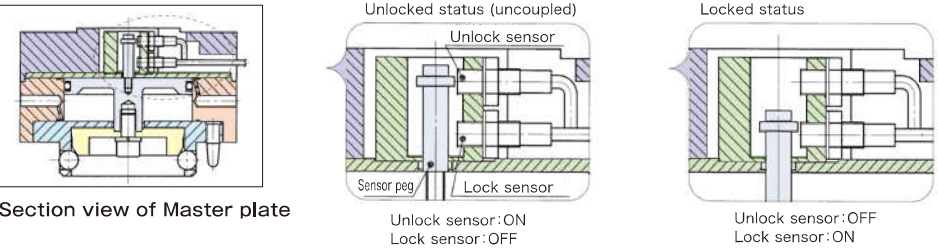


Three-position detection lock/unlock sensor : QCP-100A, QC-150C, Flex-100B, Flex-300A, GC-300A

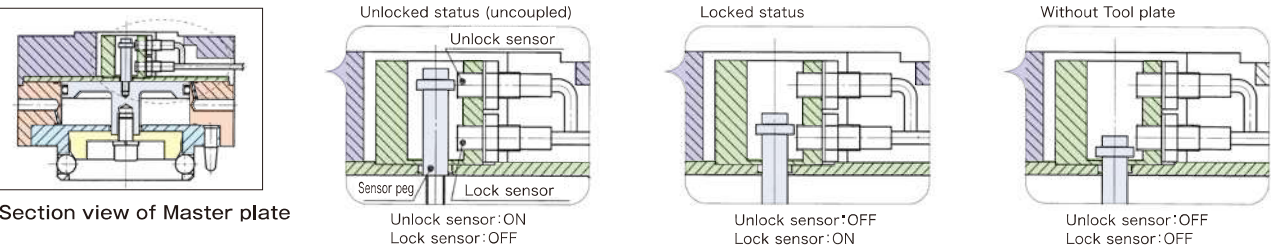

Three-position detection lock/unlock sensor : QCP-220, GIGA, (ZEUS)*

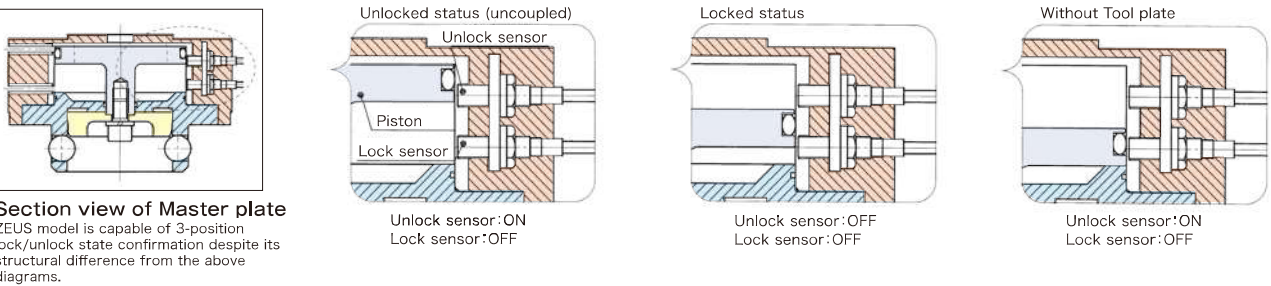

Coupling Sequence

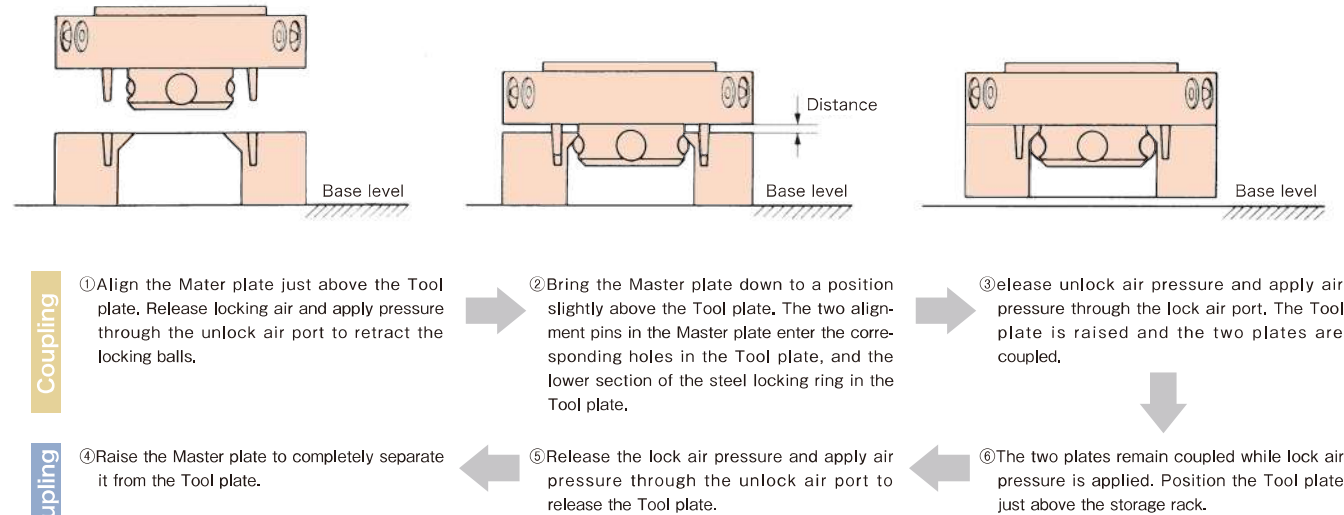

[Attention]
Do not use the Quick-Change in the fail-safe mode (without locking pneumatic pressure). It may cause damage to surrounding equipment or to the Quick-Change.

Next-Generation Robots	ZEUS	GIGA	Automatic Tool Changer	1kg	5kg	10kg	20kg	40kg	60kg	70kg	100kg	150kg	220kg	300kg	Press Handling Specification	100kg	Spot-Welding Gun-Changer	300kg	Options	Wire-Saving module / Contact Block	Non-contact electric signal block	A mechanical safety valve prevents Tool plate drops	Option List	Product Overview	Rotary Joint	PN-ZERO Series	Wrist Compliance	ROCK DEVICE LOCK/PAUSE DEVICE	Couple Joint	CJ2
------------------------	------	------	------------------------	-----	-----	------	------	------	------	------	-------	-------	-------	-------	------------------------------	-------	--------------------------	-------	---------	------------------------------------	-----------------------------------	---	-------------	------------------	--------------	----------------	------------------	-------------------------------	--------------	-----

Installation

1.Master plate installation

Using the predrilled holes, install the Master plate onto the robot interface plate (user supplied) with the bolts, O-ring, seal plate and locating pin provided.

**[Caution]**

If the o-ring ring is damaged, please replace it.
If the locating pin is not installed, you may not have the allowable static moment shown in the catalogue. Please use the locating pin.
※The Light-5A does not include seal plates.

2.Tool plate installation


Install the Tool plate onto the tool adaptor plate (user supplied), using the pre-tapped holes.

**[Caution]**

Please read the Installation and Maintenance Manual and refer to the description about bolt force and screw-torque.

Robot Installation

(Model:QC-20D)

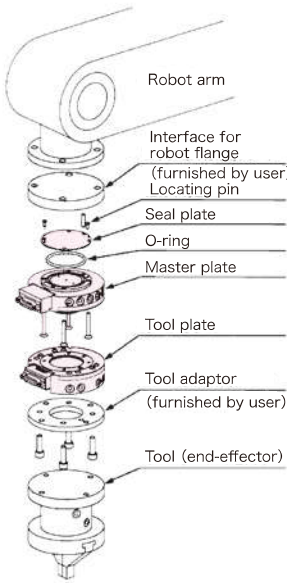

(Note) A seal plate is not required on all models.

※Seal plate and O-ring are pre-assembled on models QC-10B, QC-20D, Flex-40B, QC-60D, Flex-70A, Flex-100B, QCP-100A, QC-150C, Flex-300A, USP-100A and GC-300A.

Notes

- ① We have various specifications for press-handling, deburring, etc. Please contact BL Autotec, Ltd. for details.
- ② Please contact BL Autotec, Ltd. regarding use under dusty, oily, moist or other special environments.
- ③ Do not connect pneumatic pressure for other utilities to the lock/unlock pneumatic pressure lines. Use a "Three-position exhaust center" when using a solenoid valve for lock/unlock. Please contact us before using a solenoid valve for other mechanisms.
- ④ Please contact BL Autotec, Ltd. for the details of specific applications.
- ⑤ A product serial number is labelled on each plate of the Quick-Change. Please provide BL Autotec, Ltd. with the serial number in case further assistance is required.

**[Caution]**

When selecting a model, please refer to our technical documents and Installation and Maintenance Manuals.

Allowable positional error


Allowable positional error between the Master and Tool plates at the time of locking are shown below. In conditions where the Tool plate and tool stand are not completely fixed, movement is generated. When the Master Plate joins and couples with the Tool Plate, there is no function to correct positional errors.

1. Allowable positional error in the lateral direction (Figure 1)

Model	Allowable error *1	Allowable error
QC-1	±2.7mm	±3.0mm
Light-5A	±2.7mm	±3.0mm
QC-10B	±2.7mm	±3.0mm
QC-20D	±2.0mm	±2.7mm
Flex-40B	±2.5mm	±3.0mm
QC-60D	±3.3mm	±3.8mm
Flex-70A	±3.8mm	±4.5mm
Flex-100B, QCP-100A	±5.0mm	±5.5mm
QC-150C	±5.0mm	±5.5mm
QCP-220	±6.0mm	±6.5mm
ZEUS	±3.0mm	±6.5mm
GIGA	±6.0mm	±7.0mm
Flex-300A, GC-300A	±10.0mm	±11.0mm
USP-100A	±2.0mm	±2.5mm

Note) *1) Allowable positional errors indicate clearance made by the tapers of part A of the Master Plate and part B of the Tool Plate stated below.
*2) Maximum allowable error includes the clearance between parts C and D below.

Figure 1 Flat surface positional error




2. Allowable positional error in the pitch direction (Figure 2)

Model	Allowable error
QC-1	$\theta = 0.5 \text{ deg}$
Light-5A	$\theta = 1.1 \text{ deg}$
QC-10B	$\theta = 1.1 \text{ deg}$
QC-20D	$\theta = 0.8 \text{ deg}$
Flex-40B	$\theta = 1.0 \text{ deg}$
QC-60D	$\theta = 0.6 \text{ deg}$
Flex-70A	$\theta = 0.5 \text{ deg}$
Flex-100B, QCP-100A	$\theta = 0.6 \text{ deg}$
QC-150C	$\theta = 0.7 \text{ deg}$
QCP-220	$\theta = 0.5 \text{ deg}$
ZEUS	$\theta = 0.5 \text{ deg}$
GIGA	$\theta = 0.3 \text{ deg}$
Flex-300A, GC-300A	$\theta = 0.6 \text{ deg}$
USP-100A	$\theta = 0.5 \text{ deg}$

Note) The BL Quick-Change uses a Tool plate lifting method and the numeric values above are at air pressure of 5 (kgf/cm2).

Figure 2 Pitch position




3. Allowable positional error in the rotational direction (Figure 3)

Model	Allowable error
QC-1	±3.5 deg
Light-5A	±5 deg
QC-10B	±4 deg
QC-20D	±5 deg
Flex-40B	±5 deg
QC-60D	±4 deg
Flex-70A	±4 deg
Flex-100B, QCP-100A	±4 deg
QC-150C	±4 deg
QCP-220	±2.5 deg
ZEUS	±1.5 deg
GIGA	±1.5 deg
Flex-300A, GC-300A	±4 deg
USP-100A	±2.5 deg

Note) The numeric values shown above are when the Master and Tool plates are coaxially positioned.

Figure 3 Rotational position error



Optimum clearance between plates for teaching

1. Coupling

[BL] QUICK-CHANGE uses a lifting method to couple the Master and Tool plates so it is not necessary to teach each plate. With clearance between the plates, the tool is lifted using air pressure supplied for coupling. Please refer to the tables below for optimum clearance between the Master and Tool plates when teaching.

2. Optimum clearance between plates

QC-1		Light-5A		QC-10B		QC-20D	
[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]
under 1kg	1.0mm or less	under 2.5kg	1.5mm to 2.0mm	under 5kg	1.0mm or less	under 10kg	2.0mm or less
		over 2.5kg	1.5mm	5 ~ 7.5kg	0.8mm or less	10 ~ 15kg	1.5mm or less
				7.5kg 以上	0.7mm or less	over 15kg	1.0mm or less
QCE-40, Flex-40B		QC-60D		Flex-70A		Flex-100B, QCP-100A	
[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]
under 20kg	2.0mm or less	under 30kg	2.0mm or less	under 35kg	2.0mm or less	under 50kg	4.0mm or less
20 ~ 30kg	1.5mm or less	30 ~ 45kg	1.5mm or less	35 ~ 50kg	1.5mm or less	50 ~ 75kg	3.0mm or less
30kg 以上	1.0mm or less	over 45kg	1.0mm or less	over 50kg	1.0mm or less	over 75kg	2.0mm or less
QC-150C		QCP-220		Flex-300A, GC-300A		USP-100A	
[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]
under 75kg	4.0mm or less	under 50kg	4.0mm or less	under 150kg	0.4mm or less	under 25kg	2.0mm or less
75 ~ 115kg	3.0mm or less	50 ~ 110kg	3.0mm or less	150 ~ 225kg	0.3mm or less	25 ~ 50kg	1.5mm or less
115kg 以上	2.0mm or less	over 110kg	2.0mm or less	over 225kg	0.2mm or less	over 50kg	1.0mm or less
ZEUS		GIGA					
[Tool weight]	[Plate clearance]	[Tool weight]	[Plate clearance]				
0~230kgf	2.0mm or less	under 250kg	6.0mm or less				
(When utilizing the approach sensor(s))		250 ~ 375kg	4.0mm or less				
0~230kgf	1.0mm or less	375 ~ 500kg	3.0mm or less				
		over 500kg	2.5mm or less				

*Please set plate clearance at 1.0mm or less regard-less of tool weight when using an approach sensor.

*Please set plate clearance at 1.0mm or less regard-less of tool weight when using an approach sensor.

*Please set plate clearance at 2.5mm or less regard-less of tool weight when using an approach sensor.

*Please set plate clearance at 1.5mm or less regard-less of tool weight when using an approach sensor.

- Note 1) Optimum clearance between plates is at air pressure of 0.49Mpa (5kgf/cm2) for coupling.
- 2) The center of gravity of the end-effectors should be below the projection plane of the Tool plate for optimum clearance between the plates.
- 3) Please refer to the instruction Manual for use with an approach sensor.

Cautions prior to use

BL Quick Change is a device for automatic tool changing, designed to be installed on industrial robot wrists. Please read the instruction manual thoroughly for proper use before operating and also refer to the industrial robot instruction manual.

- Do not allow compressed air into QUICK-CHANGE through its air pressure port before installation, as all or part of the product may be blown off resulting in product damage or operator injury.
- Do not allow compressed air into the unlock port of Model QC-10B prior to installation on the robot, as a hazardous piston blow-out may occur. Do not press the Master Plate piston to extend beyond the install surface. Repairs will be necessary if the steel balls are pushed out of the cylinder.
- Do not connect electricity to the QUICK-CHANGE before installation, as this could cause an electric shock to operators, an electrical short or result in product damage.
- Do not use QUICK-CHANGE in fail-safe mode (when air pressure is not connected), as this may damage the device or peripheral equipment.
- Use QUICK-CHANGE only within the specified limits, confirming load capacity, bending direction, torsional direction and composite moment. Otherwise, an incomplete or loose fit between the Master Plate and Tool Plate may occur.
- Do not use QUICK-CHANGE in areas exposed to dust, swarf, etc., as these conditions may cause a shortened service life or a degradation of electric contact integrity.
- Do not supply air or electricity from the robot to the tool during the couple/uncouple sequence. It may interfere with coupling/uncoupling and may damage the device or peripheral equipment.
- When you check or provide maintenance to Quick Change, please turn the Robot off and stop the supply of air pressure. Always follow the safety precautions specified in the Robot instruction manual. Otherwise, unexpected action or movement by the Robot may cause serious injury..
- Whenever detaching the Master Plate from the Robot, place the Tool Plate on the tool stand and discharge any remaining air pressure before detaching. Otherwise, parts or all of the products may be blown off, resulting in injury.
- Please use QUICK-CHANGE in conjunction with Master and Tool Plates manufactured by BL Autotec, Ltd. BL Autotec, Ltd. is not responsible for and does not warrant damage or breakage to QUICK-CHANGE if used in conjunction with plates not manufactured by us.

Periodic Inspection

- Detach the Tool Plate and place it on the Tool stand. Set the Master Plate piston to the unlock position. Please check that balls move smoothly and for adherence of grease. If the balls do not move smoothly, clean the balls and cylinder with a clean brush or cloth, and apply new grease.

About Tool Stand


- Please design loose locating tolerance theTool plate and the tool stand (refer page 59 for positional error allowance). If the locating tolerance is too tight, the locating pin of the Quick Change or the tool stand may be damaged in case of large load.

Commercial manufacturers

Product name	Application	Model, Specification	Manufacturer
Stepped parallel pin	Master Plate and Robot Adaptor	Please refer to the instruction manual for each model.	MISUMI CORPORATION http://www.misumi.co.jp
	Tool Plate and Tool Adaptor		
Adhesive for screws	Contact block cover screws	ThreeBond 1401	ThreeBond Co., Ltd. http://www.threebond.co.jp
	Master Plate screws	Loctite 222	Henkel Japan Ltd. http://www.henkel.com
Grease	O-ring lubrication	G-30 M	Shin-Etsu Chemical Co., Ltd. http://www.shinetsu.co.jp
	Steel ball lubrication	Defric Grease UTLM-10	Kawamura Research Laboratories. info@KRL.co.jp

Types of electrical contacts

Electrical probe contacts

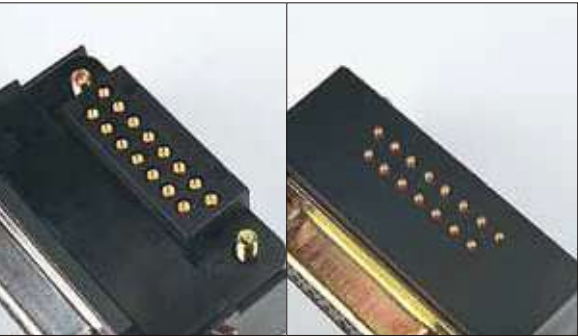

Master side

Tool side



Master side

Tool side

Electrical insertion contacts



Master side

Tool side



Connecting electric signals

Electric signal modules, such as J16A, D15 and D37, have touch-point connecting surfaces, using a contact probe method. Do not use real-time reduced wiring or servo-encoder connections, or use a plug-in type like M10A if necessary. Please contact us for further information.

Custom Quick-Change

BL AUTOTEC, LTD. can design BL QUICK-CHANGE™ for special applications based on non-standard customer requirements. Please contact us for detailed specifications.

Improved proof moment characteristic specification

Model: Based on QC-10

Curvic-type coupling mechanism for improved proof moment characteristic



Clean room specification

Model: Based on QC-20

Clean room specification with a vacuum port for dust collection so that dust will not disperse



Deburring specification

Model: Based on QC-20

Dusty environment specifications with a perimeter seal.



Large error correction specification

Model: Based on QC-20

Dependable coupling, even with large positional deviation at the approach



Dust- and drip-proof specification

Model: Based on QC-20

Specification with a seal around the circuit makes application in environments with coolant and dust possible.



Usage examples of custom specifications

- Semiconductor manufacturing process
 - Exchange of self-propelled robot hands
 - Multi-joint robots in deburring systems
 - Loading/unloading for NC machine tools
 - Removal robots for injection mold equipment
 - Exchange of die cast mold sprays
- BL can manufacture to customer requirements.

Solenoid Valve Selection

Selection of solenoid valve for coupling and uncoupling BL QUICK-CHANGE
(Conditions: Pneumatic pressure is continuously supplied and electric supply is shut out)
Secure pneumatic pressure supply independent from utility pneumatic pressure supply. If shared with utility, it may be insufficient for intended flow rate.

	Type of Solenoid Valve	Advantage	Caution
◎	2-position Single 	1. Maintains complete locking even if the power is shut off. 2. Less cost and less wiring.	1. Requires wiring and programming for off-to-lock when the power is OFF. 2. May lock unexpectedly if the power is shut OFF during unlocking operation.
○	2-position Double 	1. Maintains complete locking even if the power is shut off. 2. Maintains previous state when the power is shut off.	1. The valve switch position is not identifiable before the power is on. (Air pressure may be supplied even during the unlocking operation.)
△	3-position Pressure Center 	1. The Tool Plate will not drop for a long period of time, even if the solenoid valve is spent (to the extent of internal leakage). (Note) : Not available for use on Light-5A	1. Actuates locking piston if the power is shut off during unlocking operation with air pressure applied.
△	3-position Exhaust Center 		1. Quick-Change holds the Tool Plate using the fail-safe function when the power is shut off. (There is a slight gap between the Master Plate and the Tool Plate in this state.)
×	3-position Closed Center 		1. The Tool Plate may drop after a long period of time if the solenoid valve is spent (to the extent of internal leakage).

※ When air pressure supply is stopped, the coupling state moves to fail-safe. There is a slight gap between the Master Plate and the Tool Plate but the Tool Plate is not dropped.
※ Do not leave in the fail-safe mode for a long time and do not operate in the fail-safe mode.
※ If reverse-pressure enters the exhaust port of the solenoid valve, there is a risk that the Quick Change will unlock and drop the Tool Plate. Individual exhaust is recommended.
※ Please plumb the A port of the solenoid valve to the unlock port of Quick Change and the B port of the solenoid valve to the lock port of Quick Change.
※ For details, please contact BL Autotec, Ltd.

Next-Generation Robots	ZEUS
Automatic Tool Changer	GIGA
1kg	
5kg	
10kg	
20kg	
40kg	
60kg	
70kg	
100kg	
150kg	
220kg	
300kg	
Press Handling Specification	
100kg	
Spot-Welding Gun-Changer	
300kg	
Options	
Wire-Saving module / Contact Block	
Non-contact electric signal block	
A mechanical safety valve prevents Tool plate drops	
Option List	
Product Overview	
Rotary Joint	
PN-ZERO Series	
Wrist Compliant	
FOC DEVICE, LOCK-FREE DEVICE	
Couple Joint	
CJ2	